

# Hepta-band bandpass filter based on folded cross-loaded stepped impedance resonator

*by* Teguh Firmansyah

---

**Submission date:** 03-Apr-2023 02:26PM (UTC+0700)

**Submission ID:** 2054412180

**File name:** File\_017.pdf (525.37K)

**Word count:** 2061


**Character count:** 9467

# Hepta-band bandpass filter based on folded cross-loaded stepped impedance resonator

T. Firmansyah<sup>✉</sup>, S. Praptodiyono, A.S. Pramudyo, C. Chairunissa and M. Alaydrus

A hepta-band bandpass filter (HB-BPF) based on folded cross-loaded stepped impedance resonator (SIR) was investigated. A cross-loaded SIR microstrip structure was arranged to produce several transmission zeros. In order to reduce the filter size, a folded cross-loaded SIR was proposed. The HB-BPF was designed on FR4 microstrip substrate with  $\epsilon_r = 4.4$ , thickness  $h = 0.8$  mm, and  $\tan \delta = 0.0265$ . This HB-BPF achieves transmission coefficients of 0.15, 0.61, 0.45, 1.14, 1.57, 1.77, and 2.08 dB at 0.74, 1.49, 2.25, 3.19, 3.93, 4.72, and 5.50 GHz, respectively. The HB-BPF only occupies  $0.1 \times 0.22 \lambda_g$ , where  $\lambda_g$  is the guided wavelength at a first passband centre frequency. A good agreement between simulated and measured results validates the design method.

**Introduction:** In modern wireless communication systems, a multiband band-pass filter (MBPF) is an important and essential component. MBPF is a sub-system of a multiband radio frequency transceiver. An MBPF shall simultaneously operate at several frequencies with high performance [1]. There are some well-known methods frequently used for MBPFs design such as microstrip double-layered structure [2], stub-loaded resonators [3], penta mode resonator (PMR) [4], mixed electric and magnetic coupling [5], semi-lumped resonators [6], stepped impedance resonator (SIR) [7–9], and multiple coupling paths [10]. The authors in [2, 3] present effective methods to design MBPF with good performances by using microstrip double-layered structure [2] and stub-loaded resonators structure [3], however the fractional bandwidth (FBW) of this MBPF is not good. A PMR was proposed by [4], the result shows that the filter has a good performance MBPFs with a little poor result at the last frequency band. The MBPFs proposed by the authors in [5, 6] are still a fairly complex filter geometry with complicated designs and an MBPF with SIR [7] still achieves narrow bandwidth. Furthermore, the authors in [10] present efficient methods to design MBPF by using multiple coupling paths, however the FBW of this MBPF is low.

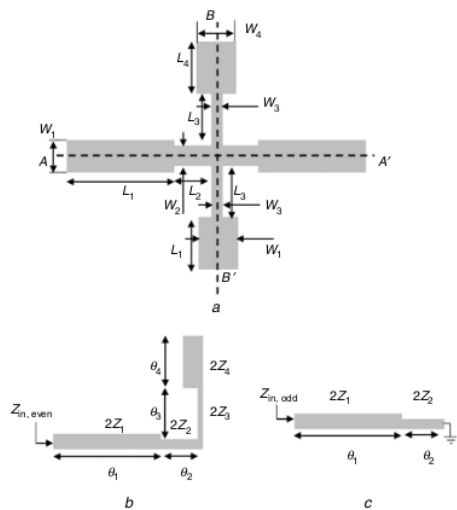

**Fig. 1** Structure of cross-loaded SIR: even-mode and odd-mode equivalent circuit

- a Structure of CL-SIR
- b Even-mode equivalent circuit
- c Odd-mode equivalent circuit

In this Letter, a cross-loaded SIR (CL-SIR) microstrip structure was proposed to produce hepta-band bandpass filter (HB-BPF). The CL-SIR is clearly distinct from the microstrip structure as used in [1–10]. The CL-SIR microstrip structure can significantly improve transmission coefficients, wider bandwidth, compact size, and ease of

fabrication. A good agreement could be observed between the simulated and measured results, which demonstrated the validity of the design.

**Proposed cross-loaded SIR:** The proposed resonator constructed by several SIR is shown in Fig. 1a, where  $(W_1, L_1)$  and  $(W_2, L_2)$  represent the widths and lengths of the SIR. The cross-loaded is connected to the centre of SIR where  $(W_3, L_3)$ , and  $(W_4, L_4)$  show the widths and length of the CL-SIR since the resonator is symmetrical to the  $A-A'$  plane and  $B-B'$  plane, the resonant frequencies for the even and odd excitation can be extracted from admittance condition  $Y_{in} = 0$  or impedance condition  $Z_{in} = \infty$  [11].

For the even excitation as shown in Fig. 1b, the resonance condition of the structure is found as follows:


$$\frac{Z_2}{4Z_3} \left( 1 + \frac{Z_2}{Z_1} \tan \theta_1 \tan \theta_3 \right) \left( \frac{Z_2}{2Z_3} \tan \theta_3 + \frac{Z_2}{2Z_4} \tan \theta_4 \right) + \left( \tan \theta_2 + \frac{Z_2}{Z_1} \tan \theta_1 \right) \left( \frac{Z_2}{2Z_3} + \frac{Z_2}{2Z_4} \tan \theta_4 \right) = 0 \quad (1)$$

Simultaneously, for the odd excitation, we obtained the following resonance condition:

$$\tan \theta_1 \tan \theta_2 = \frac{Z_1}{Z_2} \quad (2)$$

with the  $Z_n$  ( $n = 1, 2, 3, 4$ ) and  $\theta_n$  ( $n = 1, 2, 3, 4$ ) denote the characteristic impedance and electrical length, respectively.

The dependency of the frequency ratios on the impedance ratio is given in Fig. 2a. The chart shows that by increasing the impedance ratio  $(Z_1/Z_2)$ , the resonant frequencies will vary from fundamental frequency. Meanwhile, the  $f_2$  and  $f_3$  are more stable than  $f_4, f_5, f_6$  and  $f_7$ . Fig. 2b shows the transmission coefficients with varied width  $W_3$ . It shows that the transmission coefficients in  $f_5, f_6$  and  $f_7$  fall dramatically, but still higher than  $-3$  dB. Fig. 2c illustrated the extraction of reflection coefficients with varied  $L_4$ . It shows that the variation of  $L_4$  affected to reflection coefficients values and it also have effect on the frequency shift.

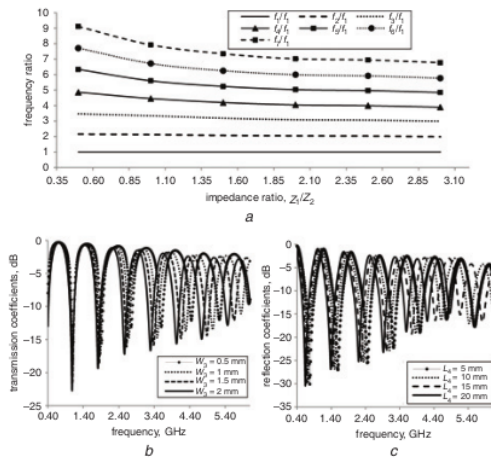

**Fig. 2** Frequency ratio, transmission coefficient, and reflection coefficient  
a Relationship between impedance ratio and normalised resonance  
b Transmission coefficients characteristics with varied stub width  $W_3$   
c Reflection coefficient characteristics with varied stub length  $L_4$

**Experiment and results discussion:** The HB-BPF was designed on FR4 microstrip substrate with the relative permittivity  $\epsilon_r = 4.4$ , a thickness  $h = 0.8$  mm, and a loss tangent  $\tan \delta = 0.0265$ . The HB-BPF was simulated by using CST Microwave Studio simulation advanced system design, whereby a RS-ZVA vector network analyser was used to test the fabricated prototype HB-BPF. The layout and the prototype photograph are shown in Figs. 3a and b, respectively. The dimensions are given as follows (all in millimetres):  $L_1 = 10$ ,  $L_2 = 10$ ,  $L_{3a} = 5.0$ ,  $L_{3b} = 15$ ,  $L_{3c} = 30$ ,  $L_{3d} = 5.0$ ,  $L_{3e} = 5.0$ ,  $L_4 = 10$ ,  $W_1 = 3.5$ ,  $W_2 = 3.0$ ,  $W_3 = 1.0$ , and  $W_4 = 3.0$ . The HB-BPF only occupies  $0.1 \times 0.22 \lambda_g$ , where  $\lambda_g$  is the guided wavelength at a first passband centre frequency.

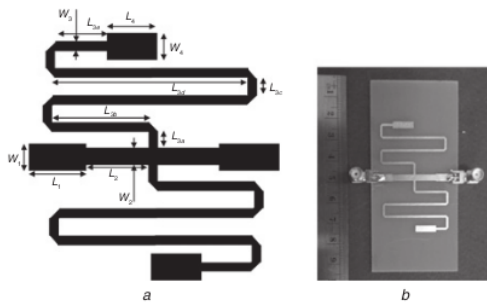


Fig. 3 Layout and photograph HB-BPF

a Layout  
b Photograph

Fig. 4 shows the simulated and measured transmission and reflection coefficients of the HB-BPF in a wideband response view. The measured group delays of all pass bands <math>< 5\text{ ns}</math> are also depicted in Fig. 4. Table 1 gives the performance comparison of the multiband BPF with some previous works, from which it can be deduced that the presented study has great merits of transmission coefficient, wide bandwidth, compact size, and ease of fabrication.

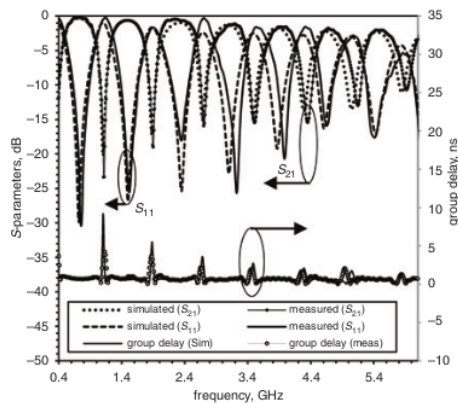


Fig. 4 Simulated and measured results

Table 1: Comparison with some previous multi-band BPFs

Refs.	Pass bands	Frequency, GHz	Transmission coefficients, dB	Size $\lambda_0^2$	-3 dB FBW (%)
[4]	5	0.63/1.2/1.8/2.49/3.46	0.43/0.86/1.10/1.98/2.55	0.02	28.5/10/13.6/4.8/4.2
[5]	5	2.1/3.0/4.0/4.7/7.2	0.98/1.76/1.22/1.77/2.39	0.01	13.7/5.6/10.5/5.1/2.9
[6]	6	0.8/1.2/1.4/1.8/2.2/2.5	2.9/2.34/2.59/2.24/2.67/2.64	0.01	2.3/2.9/3.3/3.2/2.0/2.0
[7]	6	0.9/1.2/1.4/1.7/2.0/2.4	2.3/2.0/2.3/2.7/2.2/2.0	0.01	1.5/1.3/1.4/1.3/1.5/1.4
[10]	7	1.05/1.3/1.5/1.8/2.05/2.35/2.85	1.05/1.3/1.5/1.8/2.05/2.35/2.85	0.027	8/4/5/7.5/4.5/5.5/6.5
This work	7	0.74/1.49/2.25/3.19/3.93/4.68/5.50	0.15/0.61/0.45/1.14/1.57/1.77/2.08	0.022	67.5/32.2/25.3/12.8/9.16/6.19/6.00

**Conclusion:** A HB-BPF based on folded cross-loaded SIR was investigated, which has a good transmission coefficient, wide bandwidth, compact size, and ease of fabrication. The HB-BPF only occupies  $0.1 \lambda_g \times 0.22 \lambda_g$ , where  $\lambda_g$  is the guided wavelength at a lower passband centre frequency. A good agreement between simulated and measured results validates the design method.

**Acknowledgments:** The work was supported by the Ministry of Research, Technology and Higher Education, Indonesian Government

in terms of Penelitian Kerjasama Perguruan Tinggi (grant no. 267/UN43.9/PL/K/2016).

© The Institution of Engineering and Technology 2017  
Submitted: 27 March 2017 E-first: 12 July 2017  
doi: 10.1049/el.2017.1121

Firmansyah, S. Praptodiyono and A.S. Pramudyo (Department of Electrical Engineering, University of Sultan Ageng Tirtayasa, Cilegon, Banten, 42435, Indonesia)

E-mail: teguhfirmansyah@untirta.ac.id

C. Chairunissa (School of Engineering – Electronics, University of Edinburgh, Edinburgh EH9 3JN, UK)

M. Alaydrus (Department of Electrical Engineering, Universitas Mercu Buana, Meruya, Jakarta, 11650, Indonesia)

#### References

- Jing, A., Yonghong, Z., Kai, X., Yingjiang, G., William, J., and Huo, L.: 'Compact sext-band bandpass filter based on single multimode resonator with high band-to-band isolations', *Electron. Lett.*, 2016, **52**, (9), pp. 729–731, doi: 10.1049/el.2016.0227
- Hsu, K., Hung, W., and Tu, W.: 'Compact quint-band microstrip bandpass filter using double-layered substrate'. *IEEE MTT-S Int. Digest*, Seattle, 2013, pp. 1–4, doi: 10.1109/MWSYM.2013.6697353
- Chen, C.: 'Design of a compact microstrip quint-band filter based on the tri-mode stub-loaded stepped-impedance resonators', *IEEE Microw. Wirel. Compon. Lett.*, 2012, **22**, (7), pp. 357–359, doi: 10.1109/LMWC.2012.2202894
- Chuanming, Xu J., Jin, Z., and Kang, W.: 'Compact QB-BPF based on single PMR', *Electron. Lett.*, 2016, **52**, (17), pp. 1463–1465, doi: 10.1049/el.2016.2202
- Jing, A.: 'Miniaturized quint-band bandpass filter based on multi-mode resonator and  $\lambda/4$  resonators with mixed electric and magnetic coupling', *IEEE Microw. Wirel. Compon. Lett.*, 2016, **26**, (5), pp. 333–345, doi: 10.1109/LMWC.2016.2549643
- Tu, W.H., and Hsu, K.W.: 'Design of sext-band bandpass filter and sextaplexer using semi-lumped resonators for system in a package', *IEEE Trans. Compon. Packag. Manuf. Technol.*, 2015, **5**, (2), pp. 265–273, doi: 10.1109/TCPMT.2014.2387198
- Hsu, K.W., Lin, J.-H., and Tu, W.H.: 'Compact sext-band bandpass filter with sharp rejection response', *IEEE Microw. Wirel. Compon. Lett.*, 2014, **24**, (9), pp. 593–595, doi: 10.1109/LMWC.2014.2328895
- Gunawan, W., Teguh, F., and Tierta, S.: 'Design of triple-band bandpass filter using cascade tri-section stepped impedance resonators', *J. ICT Res. Appl.*, 2016, **10**, (1), pp. 43–56, doi: 10.5614%2Fijct.res.appl.2016.10.1.4
- Gunawan, W., Teguh, F., Priambodo, P.S., et al.: 'Multiband bandpass filter (BPF) based on folded dual-crossed open stubs', *Int. J. Tech.*, 2014, **5**, (1), pp. 32–39, doi: 10.14716/ijtech.v5i1.151
- Chen, C.F., Chang, S.F., and Tseng, B.H.: 'Design of compact microstrip sept-band bandpass filter with flexible passband allocation', *IEEE Microw. Wirel. Compon. Lett.*, 2016, **26**, (5), pp. 346–348, doi: 10.1109/LMWC.2016.2549023
- Alvarez-Ahumada, M.D.C., et al.: 'Application of stub loaded folded stepped impedance resonators to dual-band filters', *Prog. Electromagn. Res.*, 2015, **102**, pp. 107–124, doi: 10.2528/PIER10011406

# Hepta-band bandpass filter based on folded cross-loaded stepped impedance resonator

## ORIGINALITY REPORT

17%

SIMILARITY INDEX

10%

INTERNET SOURCES

15%

PUBLICATIONS

%

STUDENT PAPERS

## PRIMARY SOURCES

1

[dr.ntu.edu.sg](http://dr.ntu.edu.sg)

Internet Source

2%

2

Escobar-Peláez, Johanny A., José L. Olvera-Cervantes, and Alonso Corona-Chávez.

"Balanced-to-balanced dual-band bandpass filter with common-mode rejection spurious suppression and independent bands", Journal of Electromagnetic Waves and Applications, 2015.

Publication

2%

3

Jing Ai, Yonghong Zhang, Kai Da Xu, Daotong Li, Yong Fan. "Miniaturized Quint-Band Bandpass Filter Based on Multi-Mode Resonator and Resonators With Mixed Electric and Magnetic Coupling", IEEE Microwave and Wireless Components Letters, 2016

Publication

2%

4

Dan Feng, Huiqing Zhai, Lei Xi, Kedi Zhang, Dong Yang. "A new filter antenna using improved stepped impedance hairpin

1%

resonator", Microwave and Optical  
Technology Letters, 2017

Publication

---

5

[journal.uad.ac.id](http://journal.uad.ac.id)

Internet Source

1 %

---

6

Teguh Firmansyah, Herudin, Fery Kurniawan,  
Yus Rama Denny. "Multiband microstrip  
antenna array with slot and array method for  
GSM, WCDMA, and LTE", 2017 International  
Conference on Broadband Communication,  
Wireless Sensors and Powering (BCWSP), 2017

Publication

1 %

---

7

Herudin Herudin, Anggoro Suryo Pramudyo,  
Teguh Firmansyah. "Design of a Microstrip  
Antenna Dual Band Patch Rectangular Using a  
Combination Stub and Slit Methods For LTE  
and Wi-Fi Applications", 2020 2nd  
International Conference on Industrial  
Electrical and Electronics (ICIEE), 2020

Publication

1 %

---

8

Minh Tan Doan, Wenquan Che, Wenjie Feng.  
"Novel compact dual-band bandpass filter  
with multiple transmission zeros and good  
selectivity", 2012 International Conference on  
Microwave and Millimeter Wave Technology  
(ICMMT), 2012

Publication

1 %

---

9

Internet Source

1 %

10

doaj.org

Internet Source

1 %

11

Doan, MinhTan, Wenquan Che, and Hai Duong Nguyen. "Novel compact dual-band bandpass filter using square ring resonators", The 2012 International Conference on Advanced Technologies for Communications, 2012.

Publication

1 %

12

Qiang, Tian, Cong Wang, and Nam Young Kim. "A compact dual-wideband bandpass filter using two triple-mode resonators for S-band applications", Microwave and Optical Technology Letters, 2015.

Publication

1 %

13

Su, Tao, Li-Juan Zhang, Sheng-Jie Wang, Zhi-Peng Li, and Yong-Liang Zhang. "Design of dual-band bandpass filter with constant absolute bandwidth", Microwave and Optical Technology Letters, 2014.

Publication

1 %

14

Deng, H.-W., Y.-J. Zhao, X.-S. Zhang, W. Chen, and J.-K. Wang. "Compact and high selectivity dual-band dual-mode microstrip BPF with

&lt;1 %

single stepped-impedance resonator",  
Electronics Letters, 2011.

Publication

---

15

Hong-wei Deng. "Compact and high selectivity triple-band dual-mode microstrip BPF with two short-circuited stub-loaded SIRs", Microwave and Optical Technology Letters, 03/2012

Publication

---

<1 %

16

Salah I. Yahya, Abbas Rezaei, Leila Nouri. "Compact wide stopband microstrip diplexer with flat channels for WiMAX and wireless applications", IET Circuits, Devices & Systems, 2020

Publication

---

<1 %

17

Xiaojun Bi, Qiang Ma, Zilan Cao, Qinfen Xu. "Design and Analysis of Multi-Band Filtering Circuits", Springer Science and Business Media LLC, 2022

Publication

---

<1 %

18

[cora.ucc.ie](http://cora.ucc.ie)  
Internet Source

---

<1 %

19

[www.e-sc.org](http://www.e-sc.org)  
Internet Source

---

<1 %

Exclude bibliography  On