

Multi-wideband bandpass filter using meandered stub-stepped impedance resonators for multiband application.

by Teguh Firmansyah

Submission date: 04-Apr-2023 02:20PM (UTC+0700)

Submission ID: 2055451825

File name: File_057.pdf (1.54M)

Word count: 5968

Character count: 32623

Multi-Wideband Bandpass Filter Using Meandered Stub-Stepped Impedance Resonators for Multiband Application

Teguh Firmansyah¹, Herudin¹, Cindy Chairunissa², Mudrik Alaydrus³, Gunawan Wibisono⁴

Abstract – This paper proposes a multi-wideband bandpass filter (MW-BPF) using meandered stub-stepped impedance resonators (MS-SIR). This research shows that MS-SIR resonator can not only generate five-pass bands, but it also yields wide-fractional bandwidth, good transmission coefficients, and ease of fabrication. A transmission line analysis was used to design and investigate the filter structure. Furthermore, this filter was fabricated on a FR4 substrate having a size of $0.08 \lambda_G \times 0.14 \lambda_G$, with λ_G as the wavelength at the first resonant frequency. The MW-BPF achieves the following transmission coefficients/ fractional bandwidth: -0.84 dB / 42.5 %, -1.36 dB / 49 %, -1.85 dB / 14.95 %, -2.12 dB / 10.69 %, and -2.11 dB / 6.02%, at 0.44 GHz, 0.88 GHz, 1.30 GHz, 1.77 GHz, and 2.15 GHz, respectively. This filter can be applied to DVB-T400, GSM800/GSM900, GPS1200, WCDMA1800, and LTE2100. The validity of the proposed design has been shown by the good agreement between the simulation and measurement results. Copyright © 2018 Praise Worthy Prize S.r.l. - All rights reserved.

Keywords: Bandpass Filter, Meandered, Stepped Impedance Resonators, Wideband

Nomenclature

θ_N	Electrical length (°) with $N= 1, 2, 3, \dots$	I/O port	Input/output port
ϵ_r	Permittivity ($C^2N^{-1}m^{-2}$)	K	Impedance ration
λ_G	Wavelength at the first resonant frequency	LTCC	Low temperature co-fired ceramic
j	Imaginary number	LTE	Long Term Evolution
BW	Bandwidth (GHz)	MEMC	Mixed electric and magnetic coupling
FBW	Fractional bandwidth (%)	MMR	Multi mode resonator
f_c	Center frequency (GHz) with $N= 1, 2, 3, \dots$	MS-SIR	Meandered stub-stepped impedance resonators
f_N	Frequency (GHz) with $N= 1, 2, 3, \dots$	MSLRR	Multiple stubs loaded ring resonator
GDS	Group delays (ns)	MLS	Multi layered structure
h	Substrate thickness (mm)	MW-BPF	Multi-wideband bandpass filter
K	Impedance ratio	NLC	Nematic liquid crystal
L_N	Microstrip length (mm) with $N= 1, 2, 3, \dots$	PCB	Printed circuit board
S_{11}	Reflection coefficients (dB)	PMR	Penta mode resonator
S_{21}	Transmission coefficients (dB)	SIR	Stepped impedance resonator
$\tan \delta$	Loss tangent/ dielectric loss	SLR	Stub loaded resonator
W_N	Microstrip width (mm) with $N= 1, 2, 3, \dots$	SSIR	Stub stepped impedance resonator
Y_{IN}	Input admittance (Ω^{-1})	TPF	Transversal planar filter
Z_{IN}	Input impedance (Ω)	VNA	Vector Networks Analyzer
Z_0	Characteristic impedance (Ω)	WCDMA	Wideband Code Division Multiple Access
Z_N	Impedance (Ω) with $N= 1, 2, 3, \dots$	YBCO	Yttrium barium copper oxide
ADS	Advanced Design System		
BPF	Bandpass filter		
CSRR	Complement split ring resonator		
DGS	Defected ground structure		
DLS	Double layered structure		
DVB-T	Digital Video Broadcasting-Terrestrial		
FR4	Fiberglass epoxy laminate material		
GPS	Global Positioning System		
GSM	Global System for Mobile communications		
HTS	High temperature superconducting		

14 I. Introduction

A bandpass filter (BPF) is an important component in modern wireless communication systems not only to suppress harmonics but also to reduce the noise and to decrease signal interferences [1]-[2]. Planar BPFs are especially well-known filter structures that can be fabricated easily by using a printed circuit board (PCB) technology [3]-[4]. They are also suitable for commercial applications due to their low-cost integration and

compact size [4]-[5]. In recent years, designing multiband BPFs with multiband frequencies has become a trend to support the development of numerous types of wireless communication standards. There are some attractive design methods to produce a multiband BPF such as the transversal planar filter (TPF) [6]. In this method, two transmission-line segments were arranged in parallel structure and sharp-rejection multi-passbands filtering were generated by exploiting feedforward-interference principles. However, the filter size is too large. [7] and [8] have proposed a low temperature co-fired ceramic (LTCC) technology to obtain a compact filter size. However, LTCC suffers from some major drawbacks such as ceramic shrinks after firing, requiring heat removal, and difficulty to be manufactured. In addition, the unwanted coupling, parasitic effect, and the values of lumped elements cannot be predicted and controlled accurately. Furthermore, BPF based on slot complement split ring resonator (CSRR) was proposed by [9], here the slot CSRR as perturbation was used to excite the space-orthogonal degenerate mode. This method was applied for dual-mode filter. A good insertion loss has been achieved, but the BPF has a complex structure. Moreover, high temperature superconducting (HTS) BPF was proposed by [10]. This filter was fabricated on double-sided YBCO thin films with a 2-inch-diameter 0.5-mm-thick MgO wafer substrate. Further, reconfigurable and tunable BPFs were proposed by [11] and [12] by using Varactor /PIN diodes and nematic liquid crystal (NLC), respectively. These methods produce the tuning capability of bandwidth and center frequency, but they suffer from some drawbacks such as requiring active components, power supply and a complex structure. To generate a multiband BPF, multi-mode resonator (MMR) and $\lambda/4$ resonators with mixed electric and magnetic coupling (MEMC) have been presented by [13]. This proposed method requires external coupling paths and fewer resonator numbers. In order to control the resonant modes independently, a multiple stubs loaded ring resonator (MSLRR) with MEMC was proposed by [14]. However, this filter has still a complex structure. In another study, to miniaturize BPF size, a double layered structure (DLS) was presented by [15]. Furthermore, a multi-layered structure (MLS) was proposed by [16], and Ref. [17] demonstrated that with a defected ground structure (DGS) it would be possible to generate a good stopband rejection with high passband selectivity. High complex configuration of filter structures is still a major problem of DLS and MLS methods. DGS method in the ground plane will bring disadvantages such as package problems and fabrication difficulties.

The most popular method to generate multiband BPF is the stepped impedance resonators (SIR), firstly introduced by Makimoto and Yamashita in the 1980s [18]. The SIRs have shown advantageous performance in designing microstrip BPF such as a good stopband, a simple structure, a miniature size, and a low insertion loss [19]. The resonant frequencies of SIR can be tuned

by adjusting the impedance ratio.

Furthermore, [20] proposed an inverted SIR to produce dual-pass band. Moreover, SIR combined with DGS was investigated by [21], and SIR combined with interdigital capacitors was proposed [22] in order to control the harmonic frequencies. Another multiband BPF design method is based on stub loaded resonators (SLR). This method was investigated by [23]-[24].

Furthermore, the SLR method was combined with SIR method to achieve a simple design and good passband selectivity [25]-[30], this method was called stub-stepped impedance resonator (SSIR).

To achieve significant size reduction, there are some methods such as stub loaded U-shape [31], ring resonator [32], stub loaded transversal [33], and multi stub loaded [34]-[35]. Furthermore, a tunable stub loaded filter was proposed by [36]; this filter has a compact size and it is reconfigurable. The resonators are composed by a pair of varactor-loaded square split rings, an open stub and a one-end shorted closed-loop ring. These resonator employs the Skyworks varactor diodes SMV1405-074LF to adjust the center frequency and the bandwidth of second pass-band.

However, they suffer from some drawbacks such as requiring power supply, active components and a complicated structure. As a novelty, this research proposed a multi-wideband bandpass filter (MW-BPF) with meandered stub-stepped impedance resonators (MS-SIR).

In order to realize the five-band bandpass filter, this research proposed to replace the conventional half-wavelength open-circuited stub single-frequency resonators with meandered stub-stepped impedance resonators (MS-SIR). Compared with conventional half-wavelength open-circuited stub single-frequency resonators, the MS-SIR resonator could generate not only the five pass-bands, but also better transmission coefficients, higher fractional bandwidth, and compact size. To the best of knowledge, it is the first design of five-passband BPF with wide fractional bandwidth using MS-SIR, which can significantly improve the fractional bandwidth.

Furthermore, a meander method was proposed in this research to obtain a significant size reduction. A meander method could reduce a filter size as reported by [37]. Other methods to reduce filter size are rectangular dual spiral resonator [38], $\lambda/2$ stub [39], cascaded resonators [40], asymmetric SIR [41], and single penta mode resonator [42]. However, they have still a complex structure. This filter was fabricated on a FR4 substrate with $\epsilon_r=4.4$, $h=1.6$ mm, and $\tan \delta=0.0265$.

The proposed MW-BPF was simulated by Advanced Design System (ADS). The design methodology will be detailed in the following sections. Section 2 describes the design of multi-band BPF by folded MS-SIR. The transmission line analysis has been used to investigate the filter structure. The simulation and measurement results of the MW-BPF are described in Section 3. Finally, Section 4 concludes this research.

II. Stub-Stepped Impedance Resonators Structure Analysis

A conventional single-band microstrip bandpass filter shown in Fig. 1(a). The structure of single-BPF consists of a quarter-wavelength ($\lambda/4$) and an open-circuit stub resonator ($\lambda/2$) [20]. The bandwidth of a single-band microstrip BPF is in principle determined by characteristic impedances of open-circuit stub resonator as shown in Fig. 1(b).

Further, the filter structures are commonly optimized for the microstrip realization. In this work, to realize the five-band operation, each open-circuit stub resonator ($\lambda/2$) is converted to open-circuit stub-stepped impedance resonators as shown in Fig. 1(c).

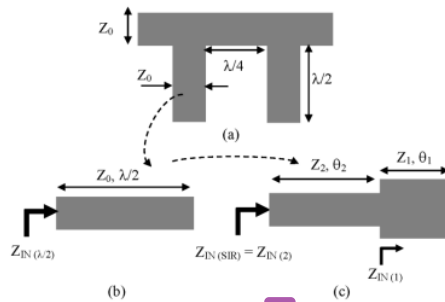


Fig. 1. (a) A single band BPF based on conventional half-wavelength open stub resonator. (b) A half-wavelength open stub resonator. (c) A stub-stepped impedance resonator

Moreover, the filter structure of MW-BPF using stub-stepped impedance resonators structure is shown in Fig. 2(a), with the Z_N ($N=1,2,3$) and θ_N ($N=1,2,3$) stand for the characteristic impedance and electrical length, respectively. Furthermore, Fig. 2(b) shows the even-excitation characteristic impedance of stub-stepped impedance resonators and Fig. 2(c) shows the odd-excitation characteristic impedance of stub-stepped impedance resonators. By investigating the input impedance Z_{IN} of the stub-stepped impedance resonators at the even-excitation condition as shown in Fig. 2(b), the following equations can be derived:

$$Z_{IN(1)} = -jZ_1 \cot \theta_1 \quad (1)$$

and:

$$\begin{aligned} Z_{IN(SIR-even\ excitation)} &= Z_2 \frac{Z_{IN(1)} + jZ_2 \tan \theta_2}{Z_2 + jZ_{IN(1)} \tan \theta_2} \\ &= Z_2 \frac{-jZ_1 \cot \theta_1 + jZ_2 \tan \theta_2}{Z_2 + j(-jZ_1 \cot \theta_1) \tan \theta_2} \end{aligned} \quad (2)$$

Therefore, the input admittance is given by:

$$Y_{IN(SIR-even\ excitation)} = \frac{1}{Z_2 - jZ_1 \cot \theta_1 + jZ_2 \tan \theta_2} \quad (3)$$

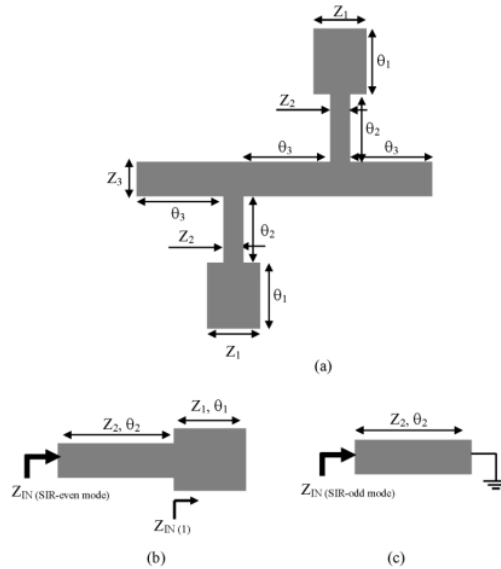


Fig. 2. (a) The multi-wideband BPF with stub-stepped impedance resonators structure, (b) even-excitation stub-stepped impedance resonators structure, (c) odd-excitation stub-stepped impedance resonators structure

The resonant frequencies can be extracted from the admittance condition $Y_{in} = 0$ or the impedance condition $Z_{in} = \infty$ [23], [43]-[45].

Therefore, the resonance condition of the structure is found as follows:

$$Z_2 + Z_1 \cot \theta_1 \tan \theta_2 = 0 \quad (4)$$

This can be obtained when:

$$\tan \theta_2 = -\frac{Z_2}{Z_1} \tan \theta_1 \quad (5)$$

or:

$$\theta_2 = \pi - \tan^{-1}(K \tan \theta_1) \quad (6)$$

With the impedance ratio $K = Z_2/Z_1$, electrical length θ_N ($N=1,2$), and $\pi = 180^\circ$. For electrical length $\theta_1 = \lambda/4$, and without any frequency dispersion, the relation between resonant frequency (f'_N) and fundamental resonant frequency (f_1) can be derived [25],[43]-[45]:

$$\frac{f'_N}{f_1} = \frac{\theta_N}{\theta_1} \quad (7)$$

$$f'_N = \frac{2\theta_N}{\pi} f_1 \quad (8)$$

Therefore, the even-excitation of the proposed stub-SIR obtains three resonant frequencies, which can be extracted by:

$$f_{\text{even excitation-1}} = f_1 \quad (9)$$

$$f_{\text{even excitation-2}} = \frac{2f_1}{\pi} (\pi - \tan^{-1}(K \tan \theta_1)) \quad (10)$$

$$f_{\text{even excitation-3}} = \frac{2f_1}{\pi} (2\pi - \tan^{-1}(K \tan \theta_1)) \quad (11)$$

By investigating the input impedance Z_{IN} at the odd-excitation condition as shown in Fig. 2(c), the following equation can be derived:

$$Z_{IN(SIR-odd\ excitation)} = jZ_2 \tan \theta_2 \quad (12)$$

The resonant frequencies can be extracted from the impedance condition $Z_{in} = \infty$ [25], [43]-[45].

Meanwhile, the resonance condition of the structure is found as follows:

$$\begin{aligned} \tan \theta_2 &= \infty \\ \theta_2 &= \frac{(2n-1)}{2} \pi \end{aligned} \quad (13)$$

By Equation (8), the odd- excitation obtains four resonant frequencies, extracted by:

$$f_{\text{odd excitation-1,2}} = (2n-1)f_1 \quad ; n = 1, 2 \quad (14)$$

It is notable that the total of resonant frequencies in even- excitation and odd- excitation has provided the five pass-bands frequency. Figs. 3(a) to (c) show a design curve of θ_2 (degrees) for different values of impedance ratio (K) and θ_1 (degrees).

In this research, the following filter structure was chosen: $Z_1 = 30\Omega$, $\theta_1 = 10^\circ$, and $Z_2 = 50\Omega$, hence $K = 1.66$ and $\theta_2 = 163^\circ$ as shown in Fig. 3(a). FR4 substrate was used and it has $\epsilon_r = 4.4$ [45].




The unused-region is shown in Fig. 3(b); it is also noted that $K = 1$ stands for uniform resonator/ without step impedance resonator.

Moreover, Fig. 4(a) illustrates the change of the second pass-band by the impedance ratio (K) and Fig. 4(b) shows the effect of frequency ratio by the impedance ratio (K), demonstrating that the impedance ratio (K) has no effect on the frequency ratio.

III. Multi-Wideband Bandpass Filter with Meandered Stub SIR

To validate the practical usefulness of the multi-band bandpass filter with meandered stub SIR, the prototype has been designed, built, and tested. The design guidelines of this BPF process were expounded in Section II.


In this paper, the characteristic impedance $Z_0 = 50\Omega$ has been used, this Z_0 value was equal with the terminated port (I/O port).

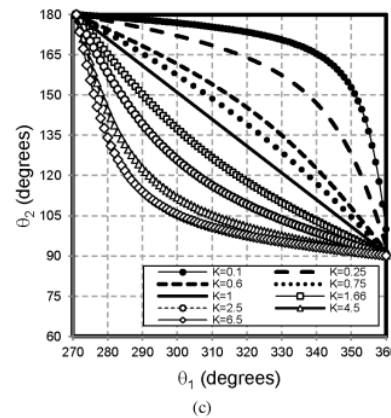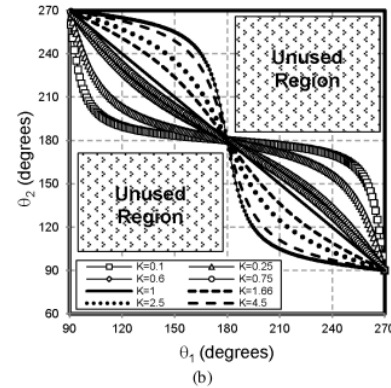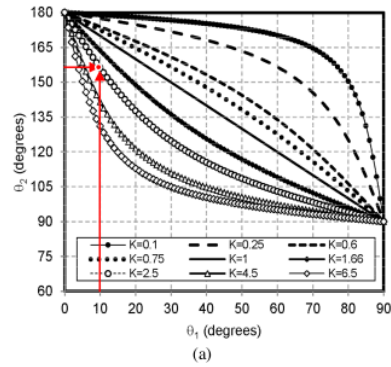

Figs. 3. The curve of θ_2 (degrees) for different values of impedance ratio (K) and θ_1 (degrees). (a) with $0 < \theta_1 < 90$ (degrees), (b) with $90 < \theta_1 < 270$ (degrees), (c) with $270 < \theta_1 < 360$ (degrees)

Furthermore, in order to produce a compact size, the following filter structure has been chosen: $Z_1 = 30\Omega$, $\theta_1 = 10^\circ$, and $Z_2 = 50\Omega$. So the value of impedance ratio becomes $K = Z_1/Z_2 = 1.66$. Based on Fig. 3(a), with $\theta_1 = 10^\circ$ and $K = 1.66$, the value of θ_2 becomes $\theta_2 = 163^\circ$. This initial physical dimensions of MW-BPF have been simulated by Advanced Design System

(ADS). This filter structure must be optimized to consider the impact of bends, open ends, shorted ends, and impedance discontinuities. After the optimization, the filter structure becomes $Z_1 = 36.3\Omega$, $\theta_1 = 10.9^\circ$, $Z_2 = 50.47\Omega$, $\theta_2 = 160.4^\circ$. The size is slightly changed compared to the original filter structure.

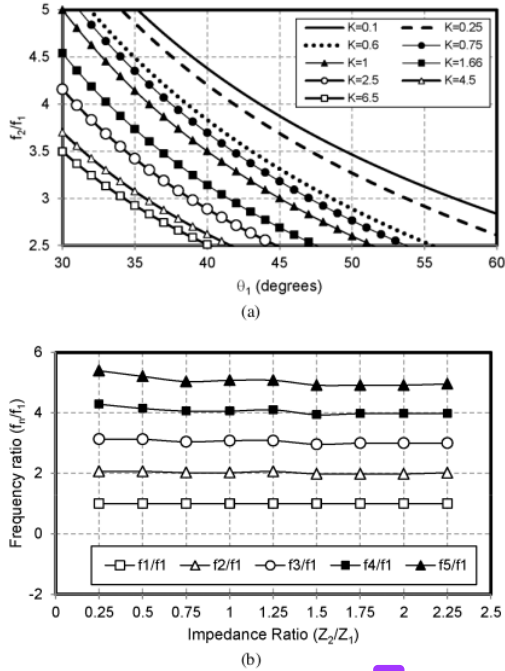

Figs 4. (a) The change of the second frequency-band by the impedance ratio (K) and length θ_1 (degrees), (b) the effect of frequency ratio by impedance ratio (K)

This filter has been fabricated on FR4 substrate with $\epsilon_r = 4.4$, $h = 1.6$ mm, and $\tan \delta = 0.0265$. In order to reduce filter size, a meander method is also proposed. Fig. 5(a) shows the layout of multi-wideband bandpass filter with meandered stub SIR (MS-SIR). The dimensions are given as follows (all in millimeters):

$$W_1 = 5.0, W_2 = 3.0, W_3 = 3.0$$


and:

$$L_{1a} = 11, L_{2a} = 10, L_{2b} = 5, L_{2c} = 35, L_{2d} = 5, L_{2e} = 35, L_{2f} = 5, L_{2g} = 35, L_{2h} = 5, L_{2i} = 25, L_{2j} = 5,$$

and $L_3 = 14$, with L total:


$$(L_{1a}, L_{2a}, L_{2b}, L_{2c}, L_{2d}, L_{2e}, L_{2f}, L_{2g}, L_{2h}, L_{2i}, L_{2j}) = L_{2stub} = 165.$$

Moreover, Fig. 5(b) shows the photograph of multi-wideband bandpass filter with meandered stub SIR (MS-SIR).

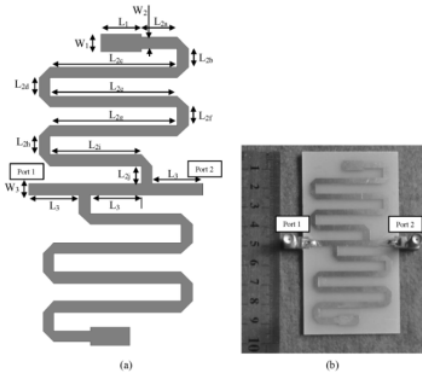

Figs. 5. (a) The layout of multi-wideband bandpass filter with meandered stub SIR (MS-SIR), (b) The photograph of multi-wideband bandpass filter with meandered stub SIR (MS-SIR)

Fig. 6(a) shows the extracted reflection coefficients (S_{11}) and the transmission coefficients (S_{21}) with different W_1 and L_1 . It can be seen that the reflection coefficients (S_{11}) of frequency f_1, f_2 , and f_3 are more stable than f_4 , and f_5 , by different W_1 and L_1 .

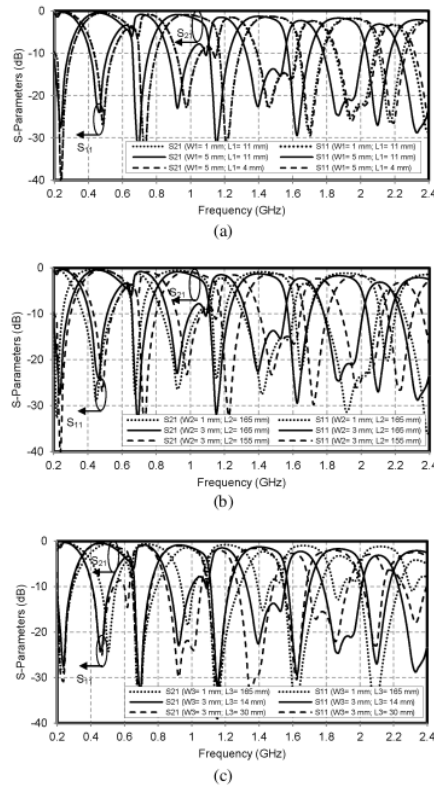

Figs. 6. Reflection coefficients (S_{11}) and transmission coefficients (S_{21}) (a) Response with varied W_1 and L_1 , (b) Response with varied W_2 and L_2 , (c) Response with varied W_3 and L_3

However, the transmission coefficients (S_{21}) at all frequencies are still stable.

Besides that, Fig. 6(b) shows the extracted reflection coefficients (S_{11}) and transmission coefficients (S_{21}) with varied W_2 and L_2 . The chart shows that both the reflection coefficients (S_{11}) and transmission coefficients (S_{21}) are still fairly constant at f_1, f_2 , and f_3 . Otherwise, at the f_4 , and f_5 , the reflection coefficients (S_{11}) and transmission coefficients (S_{21}) vary moderately, also affecting the frequency shift. Furthermore, Fig. 6(c) shows the extracted reflection coefficients (S_{11}) and transmission coefficients (S_{21}) with varied W_3 and L_3 . It can be seen that the reflection coefficients (S_{11}) decrease dramatically without resulting in frequency shift.

Furthermore, Fig. 7 shows the extracted transmission coefficients (S_{21}) and fractional bandwidth (FBW) response with different W_1 . The figure shows that by increasing W_1 , the fractional bandwidth will be stable and the transmission coefficients (S_{21}) will increase slightly. Therefore, the transmission coefficients (S_{21}) value are still higher than -3 dB.


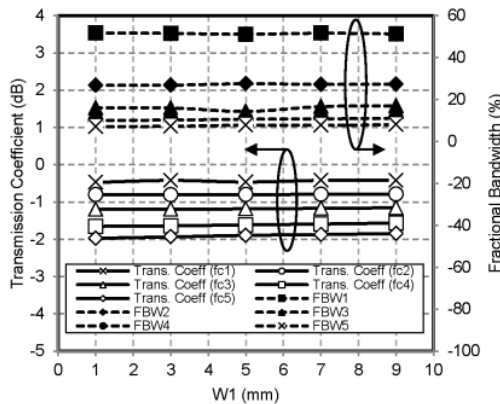


Fig. 7. Transmission coefficients (S_{21}) and fractional bandwidth (FBW) response with varied W_1 (mm)

Fig. 8(a) shows center frequency (f_c) and bandwidth (BW) response with varied L_1 (mm). The figure demonstrates that both of center frequency and bandwidth are stable for L_1 between 4-18 mm. Moreover, Fig. 8(b) illustrates transmission coefficients (S_{21}) and isolation response with varied L_1 (mm). Isolations value are better than -25 dB. Consequently, that is no interferences signal between pass-band. And then Fig. 8(b) shows that the transmission coefficients (S_{21}) value are higher than -3 dB.


Fig. 9(a) shows the center frequency and the bandwidth response with different L_{2a} (mm), and Fig. 9(b) reports the transmission coefficients (S_{21}) and isolation response with different L_{2a} (mm). The figures indicate that both the center frequency and transmission coefficients (S_{21}) are stable. However, bandwidth and isolation are increased while L_{2a} is decreased.

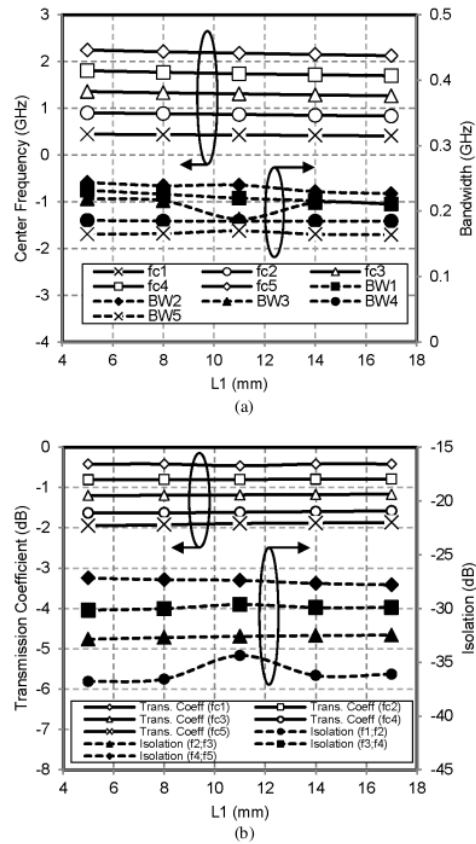


Figs. 8. (a) Center frequency and bandwidth response with varied L_1 (mm). (b) Transmission coefficients (S_{21}) and isolation response with varied L_1 (mm)

Figs. 10(a)-10(e) show the surface current distribution on multi-wideband bandpass filter with meandered stub SIR. The surface current distribution at the first frequency band ($f_1=0.44$ GHz) was flowed at the center area and slightly at the upper resonator area as shown in Fig. 10(a). At the second frequency band ($f_2=0.88$ GHz), the surface current distribution was flowed only at the upper resonator, as shown in Fig. 10(b). Furthermore, at the third frequency band ($f_3=1.30$ GHz), the surface current distribution was flowed at the upper resonator, with a slight distribution at the lower resonator, as shown in Fig. 10(c).

Moreover, both the fourth frequency band ($f_4=1.77$ GHz) and the fifth frequency band ($f_5=3.03$ GHz) show that the surface current mostly flows the lower resonator, with a little surface current in the upper resonator as shown in Fig. 10(d) and Fig. 10(e), respectively. The surface current distribution of MW-BPF has been simulated by Momentum-ADS. Plotting the surface current distribution on BPF provides important information for the RF signal flows.

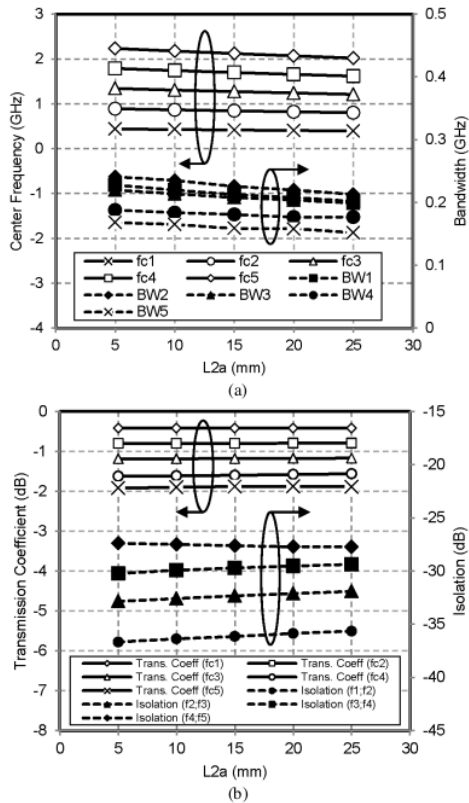

Figs. 9. (a) Center frequency and bandwidth response with varied L_{2a} (mm), (b) Transmission coefficients (S_{21}) and isolation response with varied L_{2a} (mm)

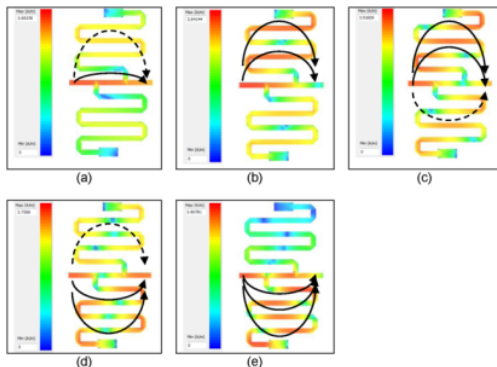

Figs. 10. Surface current distribution on on multi-wideband bandpass filter with meandered stub SIR, (a) 0.44 GHz, (b) 0.88 GHz, (c) 1.30 GHz, (d) 1.77 GHz, and (e) 2.15 GHz


Fig. 11(a) shows the comparison between simulation and measurement results achieved by the MW-BPF. A VNA Rohde Schwarz ZVA67 was used to test the fabricated prototype the MW-BPF.

Both simulated and measured results of the multi-wideband bandpass filter with meandered stub SIR have accomplished the five passbands' requirements.

The MW-BPF achieves the following transmission coefficients/fractional bandwidth: of -0.84 dB / 42.5 %, -1.36 dB / 21.49 %, -1.85 dB / 14.95 %, -2.12 dB / 10.69 %, and -2.11 dB / 6.02%, at 0.44 GHz, 0.88 GHz, 1.30 GHz, 1.77 GHz, and 2.15 GHz, respectively.

Moreover, both simulated and measured group delays (GDs) of all the pass-bands below 6 ns are depicted in Fig. 11(b).

Table I summarizes the comparison of the proposed MW-BPF.

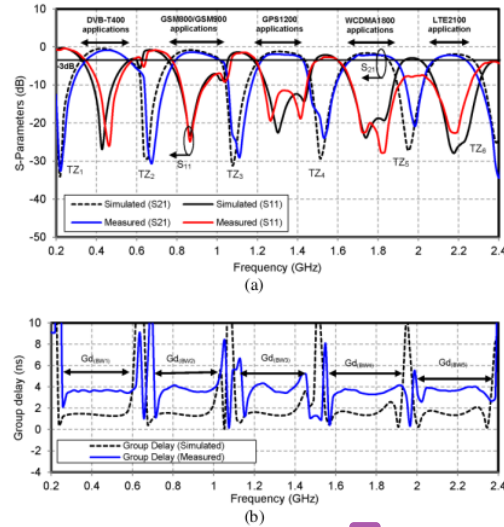

Figs. 11. (a) Simulation and measurement results of the proposed MW-BPF, (b) Simulated and measured results of group delay of the proposed MW-BPF

TABLE I
SUMMARY OF THE PROPOSED BPF COMPARISON

Ref	Method	Band	Center Freq (GHz)	Trans. coef -3dB (dB)	FBW (%)
[13]	Mixed electric and magnetic coupling (MEMC)	5	2.10 / 3.00 / 4.00 / 4.70 / 7.20	-0.98 / -1.22 / 1.77 / -2.39	13.70 / 5.60 / 10.50 / 2.90
[15]	Double-layered structure	5	1.50 / 2.50 / 3.50 / 4.50 / 5.80	-1.50 / -1.80 / -0.90 / -2.50	4.50 / 4.50 / 3.60 / 4.50 / 2.70
[26]	Trimode stub-loaded stepped impedance resonators	5	0.60 / 0.90 / 1.20 / 1.50 / 1.80	-2.80 / -2.90 / -2.90 / 2.60 / -2.30	5.80 / 5.20 / 8.20 / 8.20 / 8.00
[42]	Penta mode resonator (PMR)	5	0.63 / 1.2 / 1.8 / 2.49 / 3.46	-0.43 / -0.86 / -1.10 / 1.98 / 2.55	28.50 / 10.00 / 13.60 / 4.80 / 4.20
This Work	Meandered Stub-SIR (MS-SIR)	5	0.44 / 0.88 / 1.30 / 1.77 / 2.15	-0.84 / -1.36 / -1.85 / -2.12 / -2.11	42.5 / 21.49 / 10.69 / 6.02

This filter can be applied to DVB-T400, GSM800, GPS1200, WCDMA1800, and LTE2100. This filter has a compact size of $0.08 \lambda_G \times 0.14 \lambda_G$, with λ_G is wavelength at the first frequency. Furthermore, the MW-BP achieves transmission zeros of -32.1 dB, -30.7 dB, -29.0 dB, -23.9 dB, -20.8 dB, and -34.2 dB, at 0.22 GHz, 0.68 GHz, 1.11 GHz, 1.51 Hz, 1.99 GHz, and 2.40 GHz, respectively. Finally, the validity of the proposed design was shown by the good agreement between simulation and measurement results.

IV. Conclusion

The MS-SIR resonator could generate not only the five pass-bands, but also with fractional bandwidth. This MW-BPF has a compact size of $0.08 \lambda_G \times 0.14 \lambda_G$, with λ_G is wavelength at the first frequency. This filter can be applied to DVB-T400, GSM800/GSM900, GPS1200, WCDMA1800, and LTE2100. Both the simulation and measurement results of the multi-wideband bandpass filter with meandered stub SIR have accomplished the five passbands with wide fractional bandwidth. A good agreement can be observed between the simulated and measured results which demonstrates the validity of the design.

Acknowledgements

The work for this grant was supported by the Ministry of Research, Technology and Higher Education, Indonesian Government.

References

- [1] Gan D., He S., Dai Z., Wang J., A quad-band bandpass filter using split-ring based on T-shaped stub-loaded step-impedance resonators. *Microw Opt Technol Lett*, vol. 59, pp. 2098–2104, 2017. doi: 10.1002/mop.30684
- [2] M. Pal and R. Ghatak. A Distinctive Resonance: Multiband Bandpass Filter Design Techniques Using Multimode Resonators. *IEEE Microwave Magazine*, vol. 16, no. 11, pp. 36-55, Dec. 2015. doi: 10.1109/MMM.2015.2478095
- [3] R. Zhang and D. Peroulis. Planar Multifrequency Wideband Bandpass Filters With Constant and Frequency Mappings. *IEEE Transactions on Microwave Theory and Techniques*, vol. 66, no. 2, pp. 935-942, Feb. 2018. doi: 10.1109/TMTT.2017.2756961
- [4] Q. Yang, Y. C. Jiao and Z. Zhang. Compact Multiband Bandpass Filter Using Low-Pass Filter Combined With Open Stub-Loaded Shorted Stub. *IEEE Transactions on Microwave Theory and Techniques*, vol. 66, no. 4, pp. 1926-1938, April 2018. doi: 10.1109/TMTT.2018.2791961
- [5] Gunawan, W., Teguh, F., and Tierta, S. Design of triple-band bandpass filter using cascade tri-section stepped impedance resonators. *J. ICT Res. Appl.*, vol. 10 (1), pp. 43–56, 2016. doi: 10.5614%2Fict.res.appl.2016.10.1.4
- [6] R. Gómez-García, J. M. Muñoz-Ferres and M. Sánchez-Renedo. Microwave transversal six-band bandpass planar filter for multi-standard wireless applications. *IEEE Radio and Wireless Symposium*, Phoenix, AZ, 2011, pp. 166-169. 2011. doi: 10.1109/RWS.2011.5727976
- [7] C. Li-Ju, L. Ken-Huang. A Compact Multilayer Dual-Band Bandpass Filter Using Shunt Architecture by LTCC Process For Global WLAN Applications. *Microw Opt Technol Lett*, vol. 58, no. 10, pp. 2493-2496, October 2016. doi: 10.1002/mop
- [8] Y. C. Lin, T. S. Horng and H. H. Huang. Synthesizing a Multiband LTCC Bandpass Filter With Specified Transmission- and Reflection-Zero Frequencies. *IEEE Transactions on Microwave Theory and Techniques*, vol. 62, no. 12, pp. 3351-3361, Dec. 2014. doi: 10.1109/TMTT.2014.2365454
- [9] X. Liu, X. Shi. New dual-mode square patch bandpass filter using CSRR slot-type perturbation. *Optik - Int. J. Light Electron Opt.* 2014. doi : 10.1016/j.jilleo.2014.01.020
- [10] J. Tang, H. Liu, Q. Zhang, B. Ren and Y. Liu. Miniaturized Multiband HTS Bandpass Filter Design Using a Single-Perturbed Multimode Resonator With Multitransmission Zeros. *IEEE Transactions on Applied Superconductivity*, vol. 28, no. 4, pp. 1-5, June 2018. doi: 10.1109/TASC.2018.2799993
- [11] M. Kheir, T. Kröger and M. Höft. A New Class of Highly-Miniaturized Reconfigurable UWB Filters for Multi-Band Multi-Standard Transceiver Architectures. *IEEE Access*, vol. 5, pp. 1714-1723, 2017. doi: 10.1109/ACCESS.2017.2670526
- [12] Di Jiang, Yupeng Liu, Weiping Cao, Zhiyong Guo. A Compact Novel Microwave Liquid Crystal Tunable Band-Pass Filter. *Optik - International Journal for Light and Electron Optics*. doi: 10.1016/j.jilleo.2016.06.054
- [13] J. Ai, Y. Zhang, K. D. Xu, D. Li and Y. Fan. Miniaturized Quint-Band Bandpass Filter Based on Multi-Mode Resonator and $\lambda/4$ Resonators With Mixed Electric and Magnetic Coupling. *IEEE Microwave and Wireless Components Letters*, vol. 26, no. 5, pp. 343-345, May 2016. doi: 10.1109/LMWC.2016.2549643
- [14] J. Xu, W. Wu and G. Wei. Compact Multi-Band Bandpass Filters With Mixed Electric and Magnetic Coupling Using Multiple-Mode Resonator. *IEEE Transactions on Microwave Theory and Techniques*, vol. 63, no. 12, pp. 3909-3919, Dec. 2015. doi: 10.1109/TMTT.2015.2488643
- [15] K. W. Hsu, W. C. Hung and W. H. Tu. "Compact quint-band microstrip bandpass filter using double-layered substrate." *IEEE MTT-S International Microwave Symposium Digest (MTT)*, Seattle, WA, 2013, pp. 1-4. doi: 10.1109/MWSYM.2013.6697353
- [16] R. E. Arif, M. A. Muslim, S. H. Pramono, C. Y. Hsu and T. S. Horng. "Multilayer quad-band BPF with controllable transmission zeros." *IEEE Asia Pacific Microwave Conference (APMC)*, Kuala Lumpur, 2017, pp. 722-725. doi: 10.1109/APMC.2017.8251548
- [17] Y. W. Chen, T. C. Tai, H. W. Wu, Y. K. Su and Y. H. Wang. "Design of compact multilayered quad-band bandpass filter." *IEEE MTT-S International Microwave Symposium (IMS)*, Honolulu, 2017, pp. 1815-1818. doi: 10.1109/MWSYM.2017.8059004
- [18] M. Makimoto and S. Yamashita. *Microwave Resonators and Filters for Wireless Communication*. Berlin, Germany: Springer-Verlag, 2003.
- [19] J. T. Kuo and E. Shih. Microstrip stepped impedance resonator bandpass filter with an extended optimal rejection bandwidth. *IEEE Transactions on Microwave Theory and Techniques*, vol. 51, no. 5, pp. 1554-1559, May 2003. doi: 10.1109/TMTT.2003.810138
- [20] M. A. S. Alkanhal. Dual-Band Bandpass Filters Using Inverted Stepped-Impedance Resonators. *J. of Electromagn. Waves and Appl.*, Vol. 23, 1211–1220, 2009.
- [21] F. Wei, P. Y. Qin, Y. J. Guo and X. W. Shi. Design of multi-band bandpass filters based on stub loaded stepped-impedance resonator with defected microstrip structure. *IET Microwaves, Antennas & Propagation*, vol. 10, no. 2, pp. 230-236, 1 29 2016. doi: 10.1049/iet-map.2015.0495
- [22] C. Pongsathom, A. Prayoot. A Quad-Band Bandpass Filter Using Stepped Impedance Resonators with Interdigital Capacitors. *WILEY IEEJ Transactions On Electrical And Electronic Engineering*, 2018.

- doi: 10.1002/tee.22668
- [23] X.-M. Lin. Design of Compact Tri-Band Bandpass Filter using $\lambda/4$ and Stub-Loaded Resonators, *Journal of Electromagnetic Waves and Applications*, vol. 24, pp. 2029-2035, 2010.
- [24] Zhang, X. Y. Gao, L. Cai, Z. Y. Zhao, X.-L. Novel tri-band bandpass filter using stub-loaded short-ended resonator. *Progr. Electromagn. Res. Lett.*, vol. 40, pp. 81–92, 2013.
- [25] Velazquez-Ahumada, M. D. C., J. Martel-Villagran, F. Medina, et al., Application of stub loaded folded stepped impedance resonators to dual band filters. *Progress In Electromagnetics Research*, vol. 102, pp. 107-124, 2010. doi:10.2528/PIER10011406
- [26] C. F. Chen. Design of a Compact Microstrip Quint-Band Filter Based on the Tri-Mode Stub-Loaded Stepped-Impedance Resonators. *IEEE Microwave and Wireless Components Letters*, vol. 22, no. 7, pp. 357-359, July 2012. doi: 10.1109/LMWC.2012.2202894
- [27] J. Xu, W. Wu and C. Miao. Compact Microstrip Dual-/Tri-/Quad-Band Bandpass Filter Using Open Stubs Loaded Shorted Stepped-Impedance Resonator. *IEEE Transactions on Microwave Theory and Techniques*, vol. 61, no. 9, pp. 3187-3199, Sept. 2013. doi: 10.1109/TMTT.2013.2273759
- [28] Xu, J. Compact Dual-/Tri-/Quad-Band bandpass filters using shorted stub loaded stepped-impedance resonator. *Int J RF and Microwave Comp Aid Eng.*, vol. 25, pp. 601-609, 2015. doi:10.1002/mmce.20898
- [29] J. Chen, J. Shen, N. Gao and A. Zhang. Compact quad-band bandpass filter based on sextuple-mode stepped impedance stub-loaded resonator. *Electronics Letters*, vol. 52, no. 3, pp. 214-215, 2016. doi: 10.1049/el.2015.2541
- [30] Xu, J. Compact Second-Order Dual- And Quad-Band Bandpass Filters Using Asymmetrical Stub-Loaded Resonator And Uniform Impedance Resonator. *Microw Opt Technol Lett.* Vol. 57, No. 4, pp. 997-1003. April 2015. doi: 10.1002/mop
- [31] L. Jie, L. Cheng, Z. Haijing and X. Xiangzheng. A Novel Miniature Dual-Band Bandpass Filter Based On The First And Second Resonances For 2.4/5.2 GHz WLAN Application. *Microw Opt Technol Lett.* vol. 57, no. 5, pp. 1143-1146. May 2015. doi: 10.1002/mop
- [32] Benriad, F., Zbitou, J., Benaïssa, A., Bennis, H., Chinig, A., Sanchez, A., A Novel Design of a Ring Resonator Low Pass Filter, (2015) *International Journal on Communications Antenna and Propagation (IRECAP)*, 5 (5), pp. 307-310. doi: https://doi.org/10.15866/irecap.v5i5.7373
- [33] R. Gómez-García, D. Psychogiou, J. M. Muñoz-Ferreras and D. Peroulis, Multi-band signal-interference planar bandpass filters based on stub-loaded transversal filtering sections, *IEEE MTT-S International Wireless Symposium (IWS)*, Shanghai, pp. 1-4, 2016. doi: 10.1109/IWSS-IWS.2016.7585395
- [34] Y. Jun-Mei Yan, C. Liang-Zu, and W. Xing-Guo. A Compact Triple-Band Passband Filter Using Multi-Stub Loaded Resonator and Asymmetrical SIRS. *Progress In Electromagnetics Research Letters*. vol. 50, pp. 49–54, 2014
- [35] R. Gómez-García, R. Loeches-Sánchez, D. Psychogiou and D. Peroulis, Multi-Stub-Loaded Differential-Mode Planar Multiband Bandpass Filters. *IEEE Transactions on Circuits and Systems II: Express Briefs*, vol. 65, no. 3, pp. 271-275, March 2018. doi: 10.1109/TCSII.2017.2688336
- [36] Du, X., You, C. J., Cai, J., He, Z., Shen, M. and Jiang, Y. Novel tri-band bandpass filter with one high selective tunable passband. *Microw. Opt. Technol. Lett.*, vol. 59, pp. 1464-1468, 2017. doi:10.1002/mop.30562
- [37] C. Fu-Chang Chen and C. Qing-Xin. A Compact Dual-Band Bandpass Filter Using Meandering Stepped Impedance Resonators. *Microw. Opt. Technol. Lett.* vol. 50, no. 10, pp. 2619-2621. October 2008. doi: 10.1002/mop
- [38] Bukuraa D., Songa K., Rena X., et al. Miniaturized microstrip bandpass filter designed using rectangular dual spiral resonator. *AEU - International Journal of Electronics and Communications*, vol 68, pp. 706–709, 2014. doi: 10.1016/j.aue.2014.02.005
- [39] Pragnan Chakravorty, P. A microstrip wideband bandpass filter based on $\lambda/2$ stub with spurious passband suppression scheme, *International Journal of Electronics*, vol. 101, 2014, pp. 383–390. doi: 10.1080/00207217.2013.780305
- [40] C. -F. Chen., T. -Y. Huang., R. -B. Wu. Design of dual- and triple-passband filters using alternately cascaded multiband resonators. *IEEE Transactions on Microwave Theory and Techniques*, vol. 54, pp. 3550–3558, 2006. doi: 10.1109/TMTT.2006.880653
- [41] Hung-Wei Wu., Ru-Yuan Yang. A new quad-band bandpass filter using asymmetric stepped impedance resonators, *IEEE Microwave and Wireless Components Letters*, vol. 21, pp. 203 – 205, 2011. doi: 10.1109/LMWC.2011.2106153
- [42] Chuanming Zhu Jin Xu., Wei Kang, Wen Wu. Compact QB-BPF based on single PMR. *Electronics Letters*, vol. 52, pp. 1463–1465, 2016. doi: 10.1049/el.2016.2202
- [43] Firmansyah T, Praptodino S, Wiryadinata R, et al. Dual-wideband band pass filter using folded cross-stub stepped impedance resonator. *Microw Opt Technol Lett*, vol. 59, pp. 2929–2934, 2017. doi: 10.1002/mop.30848
- [44] Firmansyah, T., Praptodiyono, S., Pramudyo, et al. Hepta-band bandpass filter based on folded cross-loaded stepped impedance resonator. *Electronics Letters*, vol 53, pp. 1119–1121, 2017. doi: 10.1049/el.2017.1121
- [45] Wibisono, G., Firmansyah, T., Priambodo, PS., et al. Multiband bandpass filter (BPF) based on folded dual crossed open stubs. *Int J Tech*, volume 5, 2014, pages 32–39. doi: 10.14716/ijtech.v5i1.151

Authors' information

¹Department of Electrical Engineering, University of Sultan Ageng Tirtayasa.

²School of Engineering - Electronics, University of Edinburgh.

³Department of Electrical Engineering, Universitas Mercu Buana, Meruya.

⁴Department of Electrical Engineering, Universitas Indonesia.



Teguh Firmansyah was born in Subang, Indonesia. He received B.Eng (S.T) degree in electrical engineering and M.Eng (M.T) degree in telecommunication engineering from Department of Electrical Engineering Universitas Indonesia in 2010 and 2012, respectively. In 2012, he joined the Department of Electrical Engineering Universitas Sultan Ageng Tirtayasa as a researcher and lecturer. He has authored or coauthored over 20 papers published in refereed journals and conferences. He holds two patents for wideband antenna and multiband antenna. He has been a reviewer for IET Electronics Letters, CAMBRIDGE International Journal of Microwave and Wireless Technologies, and WILEY Wireless Personal Communications. His research interests include microstrip antenna and microwave circuit for various applications.



Herudin was born in Cilegon, Indonesia. He received B.Eng (S.T) degree in electrical engineering and M.Eng (M.T) degree in electrical engineering from Department of Electrical Engineering Universitas Sultan Ageng Tirtayasa and Universitas Trisakti, respectively. Now, he is a researcher and lecturer at Department of Electrical Engineering Universitas Sultan Ageng Tirtayasa.



Cindy Chairunissa received Bachelor degree in Electrical Engineering from the University of Indonesia and is currently pursuing the MSc Electronics degree at the University of Edinburgh. The author has worked as Instrumentation & Control engineer prior continuing the postgraduate degree.



Mudrik Alaydrus received Dipl.-Ing. degree at Universitaet Hannover in 1997 and Dr.-Ing. degree at Universitaet Wuppertal, Germany in 2001, both in electrical engineering. From 1997 to 2002 he worked as a research and teaching assistant at the group of electromagnetic theory at Universitaet Wuppertal. Since 2003 he has worked as lecturer at Universitas Mercu Buana, Jakarta. His main interests are computational electromagnetics and its applications in wireless communication systems. He is author of three text books on Transmission Lines, Antennas, and Electromagnetic Fields (all in Indonesian) and more than 90 publications in journals and conferences. Mudrik Alaydrus is member of Verein der Deutschen Elektroingenieure and Senior Member of IEEE. Now, he is a Professor of Telecommunication and Electromagnetics in Department of Electrical Engineering, Universitas Mercu Buana UMB, Jakarta



Gunawan Wibisono was born in Tegal, Indonesia, in 1966. He received the BE degree in Electrical Engineering from Universitas Indonesia, Depok, Indonesia in 1990. He received M.S. and Ph.D degrees in Telecommunication Engineering from Keio University Japan, in 1995 and 1998, respectively. He is currently working at the Department of Electrical Engineering, University of Indonesia. His research interest coding and modulation, RF system, wireless system, and telecommunication regulation.

Multi-wideband bandpass filter using meandered stub-stepped impedance resonators for multiband application.

ORIGINALITY REPORT

19%

SIMILARITY INDEX

9%

INTERNET SOURCES

17%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Ping Yu, Bai Cao Pan. "Band-pass Power Divider Based on Spoof Surface Plasmon Polaritons and Substrate Integrated Waveguide", 2020 Cross Strait Radio Science & Wireless Technology Conference (CSRSWTC), 2020
Publication 1%
- 2 nysed-prod.engageny.org
Internet Source 1%
- 3 Chi-Feng Chen, Sheng-Fa Chang, Kai-Wei Zhou, Jhong-Jhen Li, Guo-Yun Wang. "Ultracompact microstrip dual- and triple-band bandpass filters with a common resonator feeding structure", IET Microwaves, Antennas & Propagation, 2018
Publication 1%
- 4 docplayer.net
Internet Source 1%
- 5 www.ijcaonline.org
Internet Source <1%

6

www.ijrte.org

Internet Source

<1 %

7

Fei Li. "Superconducting filter with a linear phase for third-generation mobile communications", *Superconductor Science and Technology*, 07/01/2007

Publication

<1 %

8

Hsu, Ko-Wen, Jui-Hsiang Lin, Wei-Chung Hung, and Wen-Hua Tu. "Design of compact quad-band bandpass filter using semi-lumped resonators", *2013 IEEE MTT-S International Microwave Symposium Digest (MTT)*, 2013.

Publication

<1 %

9

Yang Xiong, LiTian Wang, Wei Zhang, DouDou Pang, Fan Zhang, Ming He. "Design of Switchable and Reconfigurable Semi-lumped Wideband Bandpass Filter", *ETRI Journal*, 2017

Publication

<1 %

10

D.-C. Gan, S.-B. He, M.-J. Sun, X.-B. Wei, W. Tang, Y. Shi. "Compact Dual-Layer Bandpass Filter Using Novel Stepped-Impedance Resonators", *Electromagnetics*, 2016

Publication

<1 %

11

Gunawan Wibisono, Muh Wildan, Johan Wahyudi, Ego Widoro, Teguh Firmansyah. "Co-design Structure of Dual-Band LNA and Dual-Band BPF for Radio Navigation Aid

<1 %

Application", Wireless Personal Communications, 2020

Publication

12

Li Gao, Xiu Yin Zhang, Xiao-Lan Zhao, Yao Zhang, Jin-Xu Xu. "Novel Compact Quad-Band Bandpass Filter With Controllable Frequencies and Bandwidths", IEEE Microwave and Wireless Components Letters, 2016

Publication

<1 %

13

Roberto Gomez-Garcia, Raul Loeches-Sanchez, Dimitra Psychogiou, Dimitrios Peroulis. "Multi-Stub-Loaded Differential-Mode Planar Multiband Bandpass Filters", IEEE Transactions on Circuits and Systems II: Express Briefs, 2018

Publication

<1 %

14

Shao, Chuan, Hui Tang, Li-Heng Zhou, and Jian-Xin Chen. "Compact LTCC bandpass filters using vertically folded half wavelength resonator", 2013 IEEE International Wireless Symposium (IWS), 2013.

Publication

<1 %

15

Shih-Fong Chao. "", IEEE Transactions on Microwave Theory and Techniques, 12/2006

Publication

<1 %

16

Wenjie Feng, MinhTan Doan, Wenquan Che. "Compact tri-band bandpass filter based on short stubs and crossed open stubs", The

<1 %

2010 International Conference on Advanced Technologies for Communications, 2010

Publication

17

www.coursehero.com

Internet Source

<1 %

18

Elsheakh, Dalia M., and Esmat A. Abdallah. "Compact multiband printed-IFA on electromagnetic band-gap structures ground plane", *Microwave and Optical Technology Letters*, 2013.

Publication

<1 %

19

Yus Rama Denny, Teguh Firmansyah, Erfan Handoko, Isnaeni, Kangil Lee, Channa Park. "Multiband Optically Transparent Antenna from Indium Zinc Tin Oxide Thin Films with Half-Circular Shaped", 2018 4th International Conference on Science and Technology (ICST), 2018

Publication

<1 %

20

hal.archives-ouvertes.fr

Internet Source

<1 %

21

mdpi-res.com

Internet Source

<1 %

22

www.ijert.org

Internet Source

<1 %

23

Shan Gao. "A Novel Compact Dual-Band Bandpass Filter Using SIRs with Open-Stub

<1 %

Line", 2008 China-Japan Joint Microwave Conference, 09/2008

Publication

24

Ai, Jing, Yonghong Zhang, Kaida Xu, Yingjiang Guo, William. T. Joines, and Qing Liu.

"Compact Sext-Band Bandpass Filter Based on a Single Multi-Mode Resonator with High Band-to-Band Isolations", Electronics Letters, 2016.

Publication

<1 %

25

Xiu Yin Zhang. "", IEEE Transactions on Microwave Theory and Techniques, 10/2007

Publication

<1 %

26

sucra.saitama-u.ac.jp

Internet Source

<1 %

27

Ahmed F. Daw, Omar T. Hussein, Hania S. Abdelhamid, Mahmoud A. Abdalla. "Ultra compact quad band resonator based on novel D-CRLH configuration", 2017 IEEE International Symposium on Antennas and Propagation & USNC/URSI National Radio Science Meeting, 2017

Publication

<1 %

28

Chen, Chi-Feng, Tze-Min Shen, Ting-Yi Huang, and Ruey-Beei Wu. "Design of Multimode Net-Type Resonators and Their Applications to Filters and Multiplexers", IEEE Transactions on Microwave Theory and Techniques, 2011.

<1 %

29

Ching-Wen Tang. "A Microstrip Bandpass Filter With Ultra-Wide Stopband", IEEE Transactions on Microwave Theory and Techniques, 06/2008

Publication

<1 %

30

Hsu, Ko-Wen, Jui-Hsiang Lin, and Wen-Hua Tu. "Compact microstrip broadband bandpass filter with harmonic suppression based on embedded resonators", 2012 Asia Pacific Microwave Conference Proceedings, 2012.

Publication

<1 %

31

Liyun Shi, Liang Zhou, Linsheng Wu. "Modeling of Slow-wave Si-BCB Transmission Line Loaded With Stepped Impedance Resonators", 2019 Cross Strait Quad-Regional Radio Science and Wireless Technology Conference (CSQRWC), 2019

Publication

<1 %

32

Luhua Wang, Xiaojun Bi, Qinfen Xu. "Octo-Band Bandpass Filter Based on Unequal-Width Cruciform Connected Resonator With Sharp Skirt", IEEE Transactions on Circuits and Systems II: Express Briefs, 2020

Publication

<1 %

33

Manimala Pal, Rowdra Ghatak. "A Distinctive Resonance: Multiband Bandpass Filter Design

<1 %

Techniques Using Multimode Resonators",
IEEE Microwave Magazine, 2015

Publication

34

Pai-Yi Hsiao. "A compact trilayer triband bandpass filter using SIR-DGS and open-loop resonator", Microwave and Optical Technology Letters, 11/2008

Publication

<1 %

35

Xuemei Zheng, Peng Gao, Yaru Han. "Design of Dual Band Microstrip Filter Based on SIR", 2021 19th International Conference on Optical Communications and Networks (ICOON), 2021

Publication

<1 %

36

dyuthi.cusat.ac.in

Internet Source

<1 %

37

etd.lib.nsysu.edu.tw

Internet Source

<1 %

38

ethesys.lis.nsysu.edu.tw

Internet Source

<1 %

39

Chen, H.-H., R.-C. Hsieh, Y.-T. Shih, Y.-H. Chou, and M.-H. Chen. "Investigations on improving the spurious performance of a coaxial combline filter", IET Microwaves Antennas & Propagation, 2011.

Publication

<1 %

40

Dilip Kumar Choudhary, Raghvendra Kumar Chaudhary. " Miniaturized filter with

<1 %

improved selectivity using split ring resonators and metallic strips ", International Journal of RF and Microwave Computer-Aided Engineering, 2021

Publication

41

Feng Wei, Chi-Yuan Zhang, Hao-Jie Yue, Xiao-Wei Shi. "Balanced Quad-Band Bandpass Filter With Controllable Frequencies and Bandwidths", IEEE Access, 2019

Publication

<1 %

42

Feng Wei, Hao Jie Yue, Xiao Hang Zhang, Xiao-Wei Shi. "A Balanced Quad-Band BPF With Independently Controllable Frequencies and High Selectivity", IEEE Access, 2019

Publication

<1 %

43

H.R. Yi, S.K. Remillard, A. Abdelmonem. "A novel ultra-compact resonator for superconducting thin-film filters", IEEE Transactions on Microwave Theory and Techniques, 2003

Publication

<1 %

44

Hong-wei Deng. "Compact and high selectivity triple-band dual-mode microstrip BPF with two short-circuited stub-loaded SIRs", Microwave and Optical Technology Letters, 03/2012

Publication

<1 %

45

Hussein N. Shaman, Jia-Sheng Hong.
"Compact wideband bandpass filter with high performance and harmonic suppression",
2007 European Microwave Conference, 2007

Publication

<1 %

46

J. Wei, Y. Chen, S. W. Liao, J. H. Xu. "Compact Notch Filters Using Vertically-Coupled Meander Stub Resonators", Journal of Electromagnetic Waves and Applications, 2012

Publication

<1 %

47

Jen-Tsai Kuo, E. Shih. "Microstrip stepped impedance resonator bandpass filter with an extended optimal rejection bandwidth", IEEE Transactions on Microwave Theory and Techniques, 2003

Publication

<1 %

48

Lei Bai, Yiqi Zhuang, Zhibin Zeng. "A Highly Compact Sext-band Bandpass Filter with Simple Structure and Wide Bandwidth", The Applied Computational Electromagnetics Society Journal (ACES), 2023

Publication

<1 %

49

Lei Chen, Xiao Yan Li, Feng Wei. "A Compact Quad-Band Bandpass Filter Based on Defected Microstrip Structure", Frequenz, 2017

Publication

<1 %

50

M. Mashhadi, N. Komjani. "Design of Novel Dual-Band Bandpass Filter with Multi-Spurious Suppression for WLAN Application", Journal of Electromagnetic Waves and Applications, 2012

Publication

<1 %

51

Maoyu Fan, Kaijun Song, Li Yang, Roberto Gomez-Garcia. "Balanced-Circuit-Based Dual-Band Bandpass Filter With Symmetrical Reflectionless Behavior", 2021 IEEE Radio and Wireless Symposium (RWS), 2021

Publication

<1 %

52

Naveen Mishra, Dilip Kumar Choudhary, Raghvendra Kumar Chaudhary. "Miniaturized open-ended dual-band band-pass filter with series stepped capacitance and shunt meandered line inductance for microwave frequency applications", International Journal of Microwave and Wireless Technologies, 2019

Publication

<1 %

53

Peng Wang, Xiang An, Zhi-Qing Lv. "A COMPACT TRI-BAND BANDPASS FILTER WITH INDEPENDENTLY CONTROLLABLE HARMONIC BANDWIDTH BY USING TWO GROUNDED VIAS", Progress In Electromagnetics Research Letters, 2018

Publication

<1 %

54

Rida Gadhafi, Dan Cracan, Ademola Akeem Mustapha, Mihai Sanduleanu. "T-SHAPED I/O FEED BASED DIFFERENTIAL BANDPASS FILTER WITH SYMMETRICAL TRANSMISSION ZEROS AND HIGH COMMON MODE REJECTION RATIO", Progress In Electromagnetics Research M, 2020

Publication

<1 %

55

Roberto Gomez-Garcia, Jose-Maria Munoz-Ferreras, Manuel Sanchez-Renedo. "Microwave transversal six-band bandpass planar filter for multi-standard wireless applications", 2011 IEEE Radio and Wireless Symposium, 2011

Publication

<1 %

56

Sheng-Yuan Lee, Chih-Ming Tsai. "New cross-coupled filter design using improved hairpin resonators", IEEE Transactions on Microwave Theory and Techniques, 2000

Publication

<1 %

57

Wen-hua Tu, Huifeng Li, Krzysztof Michalski, Kai Chang. "Microstrip Open-Loop Ring Bandpass Filter Using Open Stubs for Harmonic Suppression", 2006 IEEE MTT-S International Microwave Symposium Digest, 2006

Publication

<1 %

58

Xinrong Shi, Yuan'an Liu, Qing He, Liangjie Gu, Hongtao Zhang Fang Liu, Kaiming Liu. "Novel dual-mode circular patch bandpass filter using CSRR slot-type perturbation", Microwave and Optical Technology Letters, 2013

Publication

<1 %

59

Xu, Jin. "Compact Dual-/Tri-/Quad-Band banpass filters using shorted stub loaded stepped-impedance resonator : Dual-/Tri-/Quad-Band Banpass Filters Using SSSLIR", International Journal of RF and Microwave Computer-Aided Engineering, 2015.

Publication

<1 %

60

Zhou, Sui Hua, Wen Cheng Zhang, and An Lin Jiang. "Study on the Method of Designing Sound Absorption Model by Multiple-Layer Structures each Layer's Natural Impedance", Advanced Materials Research, 2011.

Publication

<1 %

61

etds.lib.ncku.edu.tw

Internet Source

<1 %

62

gala.gre.ac.uk

Internet Source

<1 %

63

nitdgp.ac.in

Internet Source

<1 %

64

repository.iiitd.edu.in

Internet Source

<1 %

65

www.degruyter.com

Internet Source

<1 %

66

www.netcomm.de

Internet Source

<1 %

67

Hongshu Lu, Jingjian Huang, Xiaofa Zhang, Naichang Yuan. "Compact dual-band microstrip bandpass filter using stub-loaded stepped-impedance resonator", 2017 IEEE 2nd Advanced Information Technology, Electronic and Automation Control Conference (IAEAC), 2017

Publication

<1 %

68

"Microwave and Millimeter Wave Circuits and Systems", Wiley, 2012

Publication

<1 %

69

Boyoung Lee, Seungwoo Nam, Juseop Lee. "Optimization-Free Design Equations for Narrowband Equal-Division Filtering Power Divider With Pre-Specified Filtering Response and Wideband Isolation", IEEE Transactions on Circuits and Systems I: Regular Papers, 2019

Publication

<1 %

70

C.-Y. CHANG. "Printed Circuit Board Bandpass Filters with Octave Bandwidth and Very Wide Upper Stopband", IEICE Transactions on Electronics, 12/01/2007

Publication

<1 %

71

Yu-Chen Lu, Yung-Wei Chen, Yu-Chian Jiang, Hung-Wei Wu, Yan-Kuin Su. "Design of Compact Quad-Band Bandpass Filter Using Stepped Impedance Resonators", 2018 48th European Microwave Conference (EuMC), 2018

Publication

<1 %

Exclude quotes Off

Exclude matches Off

Exclude bibliography On