

ISBN 978-602-74025-0-8

INTERNATIONAL SEMINAR 2015

Integrated View to International Development:
Society Empowerment Through
Economics, Agriculture, and Engineering Approach



PROCEEDING

Directorat of Development and Cooperation
University of Mercu Buana Yogyakarta



INTERNATIONAL SEMINAR 2015
Integrated View To International Development

**Society Empowerment Through Economics, Agriculture, and
Engineering Approach**

PROCEEDING

HEAD

Dr. Ir. Bambang Nugroho, M.P.

EDITOR

Awan Santosa, S.E, M.Sc
Dr. Ir. Bambang Nugroho, M.P.
Rina Dwiarti, SE, M.Si
Indah Susilawati, ST, M.Eng
Mamilisti Susiati, Drh, MP

Organized by :

*Direcorate of Development and Cooperation
University of Mercu Buana Yogyakarta*

TABLE OF CONTENTS

INTERNATIONAL SEMINAR 2015	i
FOREWORD	ii
TABLE OF CONTENTS	iii
HEAD OF COMMITTEE SPEECH	vii
RECTOR SPEECH	viii
COMMITTEE OF INTERNATIONAL SEMINAR 2015 - UNIVERSITY OF MERCU BUANA YOGYAKARTA	x
SCHEDULE OF INTERNATIONAL SEMINAR	xiii
KEYNOTE SPEAKER	1
Hamengku Buwono X	2
INTENSIFICATION OF SUSTAINABLE DEVELOPMENT GOALS (SDGs) TO END POVERTY IN INDONESIA	5
Prof. Haryono Suyono	5
SPEAKER	6
TRANSFORMING OUR WORLD, THE 2030 AGENDA FOR SUSTAINABLE DEVELOPMENT: The Case for Private Business	7
Peter Craven	7
THE IMPACT OF INTERNATIONALIZATION OF HIGHER EDUCATION ON SUSTAINABLE DEVELOPMENT – IN THE EASTERN EUROPEAN CONTEXT	9
HIDASI Judit	9
SÁNDOR-KRISZT Éva	9
EMANCIPATORY ACCOUNTING: UNIVERSITY ACCOUNTING ALTERNATIVE PREVENTING EDUCATION COMMERCIALIZATION	23
Sri Pujiningsih	23
Sawitri Dwi Prastiti	23
Keywords	23
ECONOMIC CHALLENGES VERSUS CREATIVE DESIGN	37
Yunida Sofiana	37
FARMERS EMPOWERMENT THROUGH THE DEVELOPMENT OF ECOTECHNOPRENEURSHIP BEHAVIOR ON MANAGING MIX FARMING BASED ON SOCIAL CAPITAL	47
Imam Santosa	47
Achmad Iqbal	47
EFFECTS OF SETTLEMENT POTENTIAL AND PROBLEM TOWARD SETTLEMENT DEVELOPMENT STRATEGY IN COASTAL MARINE PROBOLINGGO EAST JAVA	57
Wiwik Widyo Widjajanti	57
Luluk Mawardah	57

MANGO FARMERS INCREASING COMPETENCES DEVELOPMENT THROUGH MEDIA GREEN HOUSE AT STUDIO LEARNING ACTIVITIES SITUBONDO.....	69
Yushardi	69
Singgih Bektiarso	69
Sylva Alkornia.....	69
ENTREPRENEURSHIP DEVELOPMENT OF THE GOLDEN THREAD EMBROIDERY CRAFTWOMEN.....	91
(A CASE STUDY ON A MATRILINEAL COMMUNITY AT THE COASTAL MINANGKABAU).....	91
Dasrizal.....	91
Zusmelia	91
Elvawati.....	91
Rinel Fitlayeni	91
THE APLICATION OF TORAJA ORNAMENT INTO INTERIOR FURNITURE IN EFFORTS TO STRENGTHEN EFFORTS LOCAL CULTURE AND ENTREPRENEURSHIP IN JAKARTA	103
Polniwati Salim	103
ACCELERATION STRATEGY IN ACHIEVING MILLENNIUM DEVELOPMENT GOALS (MDGS) THROUGH HUMAN RESOURCES PLANNING BASED ON LOCAL ECONOMY POTENCIES	115
(THE APPLICATION ON REGENCIES/ CITIES IN EAST JAVA)	115
Ida Nuraini.....	115
Arfida Boedirachminarni	115
Muhammad Sri Wahyudi Suliswanto	115
THE EFFECT OF PREPARATION VARIATIONS ON THE ANTIOXIDANT ACTIVITY AND TOTAL PHENOLIC CONTENTS OF WHITE SAFFRON.....	141
Dwiyati Pujimulyani.....	141
Sri Raharjo.....	141
Y. Marsono.....	141
Umar Santoso	141
THE EXPERT SYSTEMS PREVENTION OF EPIDEMIC DENGUE HEMORRHAGIC FEVER BASED COMMUNITY DEVELOPMENT.....	150
Ria Arafiyah	150
Med Rizal	150
Agus Buono.....	150
I Made Dewa Subrata	150
DESIGN OF AUTOMATION CONTROL SYSTEM PARAMETER HUMIDITY FERTIGATION AEROPONICS SYSTEM IN CAISIM	163
Alimuddin.....	163
Raden Vergiansayah.....	163
Ria Arafiyah	163

Kartina	163
Bagus Kukuh Udiarto	163
Suparlan	163
Yanto Surdiyanto	163
EMPOWERING VEGETABLE FARMERS THROUGH BROADENING MARKETING ACCESS: A CASE IN KALIANGKRIK, MAGELANG	171
Bambang Nugroho	171
Setyo Utomo	171
COMMUNITY EMPOWERMENT OF KALIREJO KULONPROGO SPECIAL REGION OF YOGYAKARTA FOR DEVELOPING OYEK INTO ARTIFICIAL RICE AS STAPLE FOOD	178
Bayu Kanetro,	178
Dwiyati Pujimulyani,	178
Sri Luwihana	178
Alimatus Sahrah	178
YOUTH FARMERS INTEREST ON TRANSFORMATION OF AGRICULTURAL SECTOR IN PONOROGO REGENCY	186
Eri Yusnita	186
Arvianti	186
Asnah	186
Anung Prasetyo	186
EARLY WARNING SYSTEM ANALYSIS OF ACCIDENT DUE TO WEATHER CONDITIONS FLOOD PARAMETERS OF TEMPERATURE ON THE RAIL SCALE LABORATORY	199
THE EVALUATION OF FINANCIAL PERFORMANCE FOR ECONOMIC SUSTAINABILITY IN CREDIT UNION	207
(CASE STUDY IN "KERJA BERMAKNA" CREDIT UNION	207
JOGONALAN, KLATEN, CENTRAL JAVA)	207
Kumia Martikasari	207
LAVERAGE, PROFITABILITY, AND SIZE INFLUENCE OF CORPORATE DIVIDEND POLICY	222
Ignatius Oki Dewa Brata	222
ANSWERING THE NEEDS OF THE COMPANY WITH	232
TRANSFORMATION ORGANIZATIONS	232
Herminawaty Abubakar	232
Haeruddin Saleh	232
ELECTRIC LIGHT CONTROL SYSTEM USING COMPUTER NETWORK BASED ON MODULE USB-RELAY	243
Hardianto	243
PERFORMANCE EVALUATION OF SCIENCE AND TECHNOLOGY FOR EXPORT PRODUCT PROGRAM OF GOAT LEATHER AND VINILE HANDCRAFT IN BANTUL REGENCY	252
Awan Santosa, S.E, M.Sc	252

EARLY WARNING SYSTEM ANALYSIS OF ACCIDENT DUE TO WEATHER CONDITIONS FLOOD PARAMETERS OF TEMPERATURE ON THE RAIL SCALE LABORATORY

Fatah Suleman¹, Alimuddin² Rahman Abdullah³, Mardiono Lumbanraja², Teguh Firmansyah², MS Syarif⁴

¹Department of Chemical Engineering, Faculty of Engineering UNTIRTA

²Department of Electrical Engineering, Faculty of Engineering UNTIRTA

³Department of Civil Engineering Faculty of Engineering UNTIRTA

⁴PT Six Initiatives Jaya Mandiri

Email: ayah_tami@yahoo.com, alimuddineuntirta@yahoo.co.id, rahmanabdullahaja@gmail.com³, nainggolandion@gmail.com¹, teguhfirmansyah@untirta.ac.id³, mssyarif@yahoo.com

Abstract

The problems of railways in Indonesia is even more alarming. Especially in the capital area which is prone to accidents as a result of many factors. One of the challenges of mobility train journey itself is the inhibition caused by floods inundate rail, or even worse if the accident due to the stagnant water on the train tracks. In a necessary condition in early alerts system (early warning system) abbreviated EWS. This research aims is to detect the temperature environments flood early warning system that is easy to operate and effective for detecting flooded. System testing laboratory scale using ATmega328 microcontroller and arduino programming language with ultrasonic sensors as sensors detecting water levels and temperature sensors for weather forecasting, equipped with flood and weather data transmission using the Short Message Service (SMS). Results of the study early warning system works digitally, realtime and effective response to the reading of less than 1 second, the average error ultrasonic sensor reading is 0 to 1.14% and the average error in the moisture readings daily morning, afternoon 4.06 pm %, 2.24% temperature, average speed - average delivery of messages to mobile phones, namely, Telkomsel and XL Axiata 5:57 seconds 5.8 seconds.

Keywords: EWS flooding, temperature, ATmega328 microcontroller arduino, laboratory scale

A. Introduction

The train is one type of ground transportation are quite interested in Indonesian society with a high enough number of passengers. Train in Indonesia has existed since 138 years ago. Railway network in Indonesia is largely a relic of the Netherlands covering the path along the 6482 km spread across Java and Sumatra (Yulianto T, 2010). One of the challenges of mobility train itself is the inhibition of the trip due latticework flooded railway tracks, or even worse if the accident due to the stagnant water in the railroad, if not warned early then train the majority of electric train and diesel electric imposed floods hit can result in a short circuit at the bottom of the electrical traction, or even worse can lead to accidents that can swallow a lot of casualties. The current level of security and safety of rail travel is still lacking. Still frequent railway accidents either collision with train Collision with train or train collision with public transport. Such events can certainly be life-threatening users of rail transport. This indicates weak safety assurance in using rail transport so that the necessary wireless sensor network in realtime (Maneesha VR 2009). Area of the capital and other areas pretty much discovered flood-prone areas, has become a tradition when heavy rainfall will cause flooding in flood-prone point. Therefore it is very necessary early warning system either manually or automatically in order to reduce the occurrence of delay, delays or accidents on the railways.

Given the importance of the smooth and timely mobilization of the absolute need to use the train, needed a security device or notice early (early warning) flooded in order to minimize delays or even accidents that claimed many casualties. Another benefit of early notification is the train can quickly respond to what is to be done in order to avoid delay in departure, either by replacing power train or diesel-electric locomotives with diesel hydraulic locomotive.

There are some studies relate these are the The first, detection and early warning systems for natural disaster flood 8535-based microcontroller and sms gateway dialrain code river to discuss the length of sms messages to mobile phones is relatively fast receiver that is under 7 seconds, the flood response to the rapid alarm (Hanund Putranto,

et al; 2010). The second Flood Early Warning System Based Microcontroller Atmega 16 With Buzzer And Short Message Service discusses early warning system run properly using the buzzer indicator lights and SMS (Sumarno, et al; 2013), The third, water level monitoring and early warning flood hazard based sms discuss water level readings using ping sensor, has a good level of accuracy with an error of 0.23 cm. use sms (Frans Scifo,et al; 2013). The Fourth Sensor System Implementation For Flood Warning via SMS discuss the use of water as a conductor 2 conductor plate has successfully signaled water level (Nur Octarina, et al; 2013). The fifth, Design of Remote Monitoring System High Water Surface-Based SMS to discuss the system made capable of transmitting data sensor accurately without being affected by distance and time to the receiving device as sensor data can be accessed at any time during the tool operates on the signal range of GSM operators are used (Alimuddin et al, 2014)

B. Methods

In general, the design of an early warning system crash due to flooding on this train will observe, examine, analyze on several things, namely the performance of the sensor - the sensor, microcontroller performance, as well as interaction data delivery to the operator / engineer in the event of flooding. The design of the hardware in this study is divided into several component parts which have their respective functions. The parts include a series of resources or power supply, hardware design early warning system and the integration of hardware with a container of artificial floods.

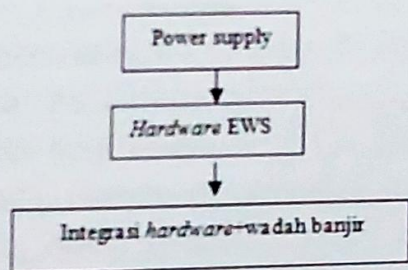


Figure 1. The Components Microcontroller

Generated by a 5 volt power adapter to the portable ultrasonic sensors where the tool path is determined by the amount of distance that is generated. Serves as the water

level detection in a place that has been determined as the point of placement of EWS in this test is done in two places, namely laboratory and railroads. If the amount of the value of water level produced did not show an increased density of water, in these conditions the appliance will repeat the commands from the microcontroller to ultrasonic sensors in real time and repeatedly to obtain data or height values indicate that the possibility of increasing the volume of water is detected, the testing times this height divided into 3 parts: 10 cm, 20 cm and 24 cm distance sensor to the water for lab scale and 55 cm, 50 cm, 33 cm distance to the water sensor for real scale railroads. By detecting a height that allows the addition of water, the volume and height of the microcontroller will command the temperature sensors to work where the sensor will work in realtime to measure the temperature. At a certain temperature the microcontroller will instruct the GSM modem wavecom serial converter RS232 to send an SMS to the number that has been set, which processes occur repeatedly until the value of predetermined temperature microcontroller will instruct the GSM modem for sending SMS, while the height of the specified divided Standby into 3 categories: first, If height has reached 24 cm, the microcontroller will activate the temperature sensor as well as instruct the GSM modem to send SMS containing water height 24 cm (AWAS) to a defined number.

If the data is read from the temperature sensor: $T > 300C$, the weather is categorized as bright, if the data is read from the sensor temperature and humidity: $T < 300C$, the weather was categorized as cloudy or rain, if the data is read from the temperature sensor: $T > 300C$, the weather is classified as high temperature, high humidity, if the data is read from the temperature sensor: $T \leq 300C$ then categorized as low-temperature weather. Furthermore, the sensor will return realtime transmit data to the microcontroller heights up to a certain height. Secondly, If height has reached 20 cm, the microcontroller will activate the temperature sensor as well as instruct the GSM modem to send SMS containing water height of 20 cm (ALERT) to a defined number. If the data is read from the temperature sensor $T > 300C$, the weather is categorized as bright, if the data is read from the temperature sensor: $T \leq 300C$, the weather was categorized as cloudy or rain, if the data is read from the sensor temperature and humidity: $t > 300C$ and $H > 50\%$, then the weather is categorized as high temperature, high humidity, if the data is read from the temperature sensor: $T \leq 300C$, the weather is categorized as a low temperature, low humidity. Furthermore, the sensor will return

realtime transmit data to the microcontroller heights up to a certain height. Third, If height has reached 10 cm, the microcontroller will activate the temperature sensor as well as instruct the GSM modem to send SMS containing "FLOOD" to the number that has been specified. If the data is read from the temperature sensor: $t \leq 300C$, the weather was categorized as cloudy or rain, if the data is read from the temperature sensor: $T > 300C$, the weather is categorized as bright, if the data is read from the temperature sensor: $T > 300C$, the weather is categorized as a high temperature, if the data is read from the temperature sensor: $t \leq 300C$ then categorized as low-temperature weather. Furthermore, the sensor will transmit data back realtime water level.

The process will continue when the ultrasonic sensors continuously transmit data of temperature and humidity that allows data to gain altitude to the microcontroller and the process will stop if the data of ultrasonic sensors transmit data to indicate there will be the addition of the water level.

C. Results And Discussion

1. Temperature Sensor

Table 1. Temperature Sensor Testing

	Sensor DHT 11	Temperature (°C)	Error (%)
Morning	28	27,9	0,35 %
Lunch	30	29	3,57 %
Afternoon	32	32,9	2,81 %

On testing the temperature sensor, producing a different value to the true value or the value of a digital thermometer, but the error value generated is not too large or are still below 5%, this is still below the general tolerance to the percentage value error should not be more than 5%. It can be concluded on the sensor temperature reading is stable and its effectiveness is still good.

2. Hardware Tests Early Warning System

Table 2. Testing Hardware Early warning system Accidents Caused by Flood At Railway mini Using Multiple Provider Different

TELKOMSEL				
Height	Low Temperature	SMS	Travel time SMS	The contents of SMS messages
24 Cm	✓	✓	5,93 Second	Status: CAUTION Water level: 24 cm Weather: Low temperature
20 Cm	✓	✓	5,46 second	Status: ALERT Water level: 20 cm Weather: Low temperature
10 Cm	✓	✓	5,59 second	Status: FLOOD Water level: 10 cm Weather: Low temperature

XL AXIATA				
Height	Low Temperature	SMS	Travel time SMS	The contents of SMS messages
24 Cm	✓	✓	6,22 Second	Status: CAUTION Water level: 24 cm Weather: Low temperature
20 Cm	✓	✓	5,78 second	Status: ALERT Water level: 20 cm Weather: Low temperature
10 Cm	✓	✓	5,99 second	Status: FLOOD Water level: 10 cm Weather: Low temperature

Based on test results flood early warning system, in Table 2, the system will first read the distance to the water level sensor ultrasonic sensor readings and then compare the results with the knowledge base that is embedded into the system. The next reading of the results can be known whether the water level in the container artificial flood in a state of alert, alert (flood alert) or the danger of flooding. Tests 1 to 3 flood early warning system, the distance to the object sensor reads 24, 20 and 10 cm corresponding knowledge base embedded in the program. So as to enable the modem untuk send an SMS as confirmation of the state of artificial floods

.The average term of SMS delivery is highly dependent on the quality of the GSM network provider service companies as well as an outline of SMS delivery also

depends on when the weather where the temperature is high, both in Telkomsel and XL Axiata texted faster than low temperature weather conditions. We can see an average delivery of SMS by Telkomsel in high temperature 5.31 seconds, XL Axiata Tekomsel 5.54 seconds compared to 5.66 seconds at low temperatures, XL Axiata 5.99 seconds. For overcast conditions - rain, Telkomsel and XL Axiata 5.55 seconds 5.93 seconds, for sunny conditions, Telkomsel and XL

D. Conclusions And Suggestions

3. Conclusion

Based on the analysis and testing of early warning system crash due to flooding arduino based microcontroller with ultrasonic sensors, temperature and SMS sending this it can be concluded: 1). Hardware Early warning system crash due to flooding at the railroad use arduino microcontroller as brain the whole system to determine the ultrasonic sensor readings of the water level and temperature and humidity sensor readings for weather information in realtime successfully designed using SMS as an output or an early warning. 2). Early warning system crash due to flooding is progressing well and effective for use mainly in the railway in Indonesia. 3). System do the reading surface water conditions in real time and average speed of sending SMS all providers to the operator or machinist by an early warning system crash caused by flooding through a GSM modem under 7 seconds, both on the laboratory scale testing and real scale using the railway. system running quickly, accurately and efficiently. 4). The test results mean percentage error (error) on ultrasonic sensor reading range of 0 - 1.14% and the percentage of errors in the temperature sensor is below 5%.

4. Suggestions

To continue this study, researchers have some advice the development of research, namely:

- 1). This research could be developed by asking the water surface elevation information with a certain text format because this research has been using a special modem, 2. This study could be developed by integrating into fields that require the

measurement of water level in realtime or into rivers early to know when the water flow increases in order to avoid flooding.

5. Acknowledgment

The authors would like to thank sponsor contribution in funding Excellent research university from the ministry of technology research and Higher Education Indonesia.

E. Bibliography

Alimuddin, Anggoro Suryo Pramudyo, Eko Hadi Santoso 2014, Design Build in Flood Early Warning System, Proceedings of the National Seminar on Microwave Antennas and Propagation (SMAP), Department of Electrical Engineering University of Mercubuna Jakarta.

Yulianto Thomas (2010), the occurrence of Accident Cause Analysis of Railway Business And Preventive The Forum, .S1 Thesis, UAJY

Maneesha V Ramesh (2009), Real-time Wireless Sensor Network for Landslide Detection, in the Proceedings of the 2009 International Conference on Wireless Networks (ICWN'09), CSREA Press, India

Nur Octarina, (2013) Implementation System Sensor Simple For Flood Warning via SMS., S1, University of Al-Azhar Indonesia

Putranto, Hanung (2010) System Detection And Early Warning Flood Disaster 8535-Based Microcontroller and SMS Gateway Dialirain Code River., JTI, STMIK Amikom, Yogyakarta

Scifo, Frans (2013) Water Level Monitoring and Early Warning Flood Hazard Based Sms., S1., Diponegoro University



CERTIFICATE

given to

Alimuddin

has participated as

Presenter

in the International Seminar "**Society Empowerment Through Multidimensional Approach:
An Integrated View to International Development**"

by University of Mercu Buana Yogyakarta, Indonesia, on 26 - 27 November 2015
in Yogyakarta, Indonesia

Dr. Alimatus Sahrah, M.Si., MM.
Rector University of Mercu Buana Yogyakarta

Dr. Ir. Bambang Nugroho, MP.
Director of Development and Cooperation
University of Mercu Buana Yogyakarta