

Compact UWB Bandpass Filter based on Crossed Dumbbell- Stub with Notch Band using Defected Microstrip Structure

by Teguh Firmansyah

Submission date: 04-Apr-2023 02:28PM (UTC+0700)

Submission ID: 2055455376

File name: File_096.pdf (1,008.9K)

Word count: 3176

Character count: 16333

Compact UWB Bandpass Filter based on Crossed Dumbbell-Stub with Notch Band using Defected Microstrip Structure

12 Teguh Firmansyah
Department of Electrical Engineering
Universitas Indonesia
Depok, Indonesia
teguh.firmansyah81@ui.ac.id

12 Gunawan Wibisono*)
Department of Electrical Engineering
Universitas Indonesia
Depok, Indonesia
gunawan@eng.ui.ac.id

20 Eko Tjipto Rahardjo
Department of Electrical Engineering
Universitas Indonesia
Depok, Indonesia
eko@eng.ui.ac.id

2 **Abstract**—A compact ultra-wideband (UWB) bandpass filter based on cross dumbbell stub with notch band structures is proposed and implemented. This bandpass filter (BPF) structure consists of directly feed line input/output. As the novelty, the cross dumbbell stub resonator was used and it was placed at the middle of the filter structure. By using this structure, the BPF not only has a compact size but also it has a wide-passband response. To remove unnecessary radio frequency (RF) signal, the rejection (notch) band was also proposed by using a novel technique which uses U-shaped defected microstrip structure (DMS). Moreover, the DMS is constructed at the center between crossed dumbbell resonators. This notch band structure has highly independent and it can be adjusted by modifying the U-shaped structure. Therefore, the specific frequency of the notch band can be selected independently without expanded number of resonator or stub. Furthermore, this BPF is fabricated on 2D - Duroid/RT 5840 substrate with permittivity (ϵ_r) of 2.2, thickness (h) 1.57 mm, and loss tangent $\tan\delta$ of 0.0009. Furthermore, the measured results show that the UWB-BPF has 3-dB passband from 3.0 – 12.2 GHz, with notch band at 6.7 GHz and the notch band's attenuation -22 dB. The design structure was verified by a good agreement between simulated and measured result. Overall, the proposed filter design has excellent performance in term of insertion loss, high independent notch-band, compact size, and implementable structures.


Keywords— BPF, defected microstrip structure, crossed-dumbbell, notch, UWB.

22 I. INTRODUCTION

The ultra-wideband (UWB) wireless technology has great attention after the Federal Communications Commission (FCC) declare that the range of frequency 3.1–10.6 GHz can be used for a commercial purpose [1][2]. The critical subsystem of UWB wireless transceiver is UWB bandpass filter (BPF). High performance of UWB-BPF is needed to reduce noise and interference of radio signals simultaneously. The performance of UWB-BPF can be determined by a good value of insertion loss (S_{21}), compact size, and implementable structures. There are various approaches have been proposed to obtain an excellent performance of UWB-BPF. 17

The UWB-BPF using modified composite-right/left-handed (CRLH) unit cell is proposed by [3] and to control transmission zeros a cross coupling is used. As the result, this UWB-BPF has good insertion loss (S_{21}) and compact size, but the BPF structure is complex. Furthermore, the cross-coupling with $\lambda/4$ short circuit-stub resonator was used by

8 [4]. As a result, the proposed UWB-BPF has a compact size and high selectivity.

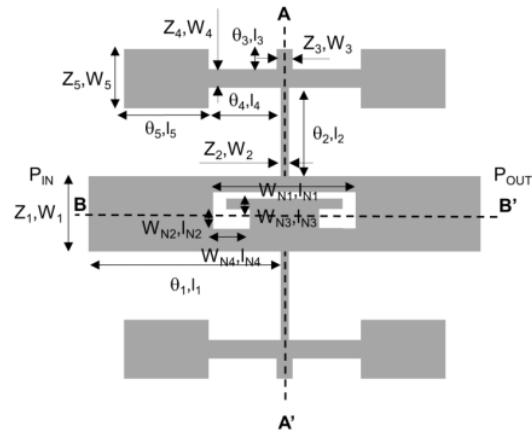

8 Fig. 1. The proposed UWB-BPF based on Crossed Dumbbell-Stub

The high selectivity response is produced by transmission zeros which are generated by coupling between input and output impedance. Furthermore, a stub-step impedance resonator (SIR) is proposed by [5]. The stub-SIR is connected at its center of filter structure symmetrically. This filter has frequency of 3.1–10.6 GHz. Furthermore, [6] proposed two rectangular stub resonators and single-stage parallel-coupled line and. The rectangular stub resonators create transmission zeros to extend stopband. Moreover, the short-circuited stubs with via-less resonator were investigated by [7]. The resonator structure was investigated by extracting all parasitic elements such as junction and discontinuity to generate UWB BPF. Moreover, Ref [8] presented four resonant modes based on multiple-mode resonator (MMR) with half-mode substrate integrated waveguide (HMSIW) structure. This resonator structure has successfully designed by this resonator structure. However, it has drawback such as complex resonator structure.

Furthermore, the utilizing short-circuited stubs with less-vias resonator structure was proposed by [9]. This paper has advantages such as via less resonator. Another attractive method is proposed [13][10]. This paper is investigated UWB-BPF based on one-cell composite right- and left-handed-transmission line (CRLH-TL) resonator with optimized using particle swarm optimization (PSO) process.

However, the UWB-BPF design has drawback such as a complex structure and low selectivity.

In order to remove unnecessary radio frequency (RF) signal, some research proposes the notch band with various resonator structure. Asymmetric open loop resonator with defected ground structures (DGS) was investigated by [11] to produce UWB BPF with notch band. Furthermore, to reduce filter size, the interdigital hairpin resonator unit with three fingers are proposed by [12]. Moreover, the multiple-mode resonators (MMR) and SIR are combined by [13] to increase bandwidth. Another resonator structure to generate UWB BPF with notch band such as complementary split ring resonators (CSRR) [14], embedded SIR [15], radial stub loaded resonator [16], modified non-uniform resonator [17], meander H-shaped slot [18] and multilayer [32] P technology [19]. All these methods propose a design UWB-BPF with notch band with good performance of S_{21} . However, the notch band is not independent. Besides that, majority the notch band structure has an impact to extend the filter size.

As novelty, this paper is proposed a compact UWB BPF based on crossed dumbbell-stub with notch band using defected microstrip structure as shown in Fig.1. The contribution of this paper such as: 1) The proposed resonator structure is based on cross dumbbell stub resonator structure, this structure can generate ultrawide pass band, 2) the notch band could be adjusted independently, 3) the notch band resonator is based on U-shaped defected microstrip structure (DMS), so the additional resonator is not required, and 4) the proposed UWB-BPF has excellent performance in term of insertion loss, compact size, and implementable structures.

This paper is organized as follows: Section 2 briefly describes the design of the proposed compact UWB bandpass filter based on crossed dumbbell-stub with notch band using defected microstrip structure, Section 3 presents the simulated and experimental results, and finally, Section 4 concludes this paper.

II. DESIGN OF CROSSED DUMBBELL-STUB RESONATOR WITH NOTCH BAND USING DEFECTED MICROSTRIP STRUCTURE

A. Crossed Dumbbell-Stub Resonator

To generate ultra-wide band, the crossed dumbbell stub resonator is proposed, as shown in Fig 1. The crossed dumbbell stub resonator is constructed by dual-dumbbell stub and it is placed at the middle of the filter structure. The $W_1, W_2, W_3, W_4,$ and W_5 represent the width of the resonator. The $l_1, l_2, l_3, l_4,$ and l_5 represent the length of the resonator. Furthermore, the resonator structure consists of five transmission lines having different characteristic impedances Z_N ($N = 1,2,3,4,5$) with corresponding electrical lengths θ_N ($N = 1,2,3$), respectively.

Since the resonator is symmetrical to the $A-A'$ plane and $B-B'$ plane, the resonant frequencies for even-mode and odd mode can be determined from impedance condition $Z_{IN} = \infty$ or admittance condition $Y_{IN} = 0$ [5][21][22]. Equivalent circuit model for the even-mode of UWB-BPF is shown in Fig. 2(a) and equivalent circuit model for the odd-mode of UWB-BPF is shown in Fig 2(b).

Analyzing the input impedance of even-mode $Z_{IN-even mode}$ can be derived:

$$Z_{INA} = -jZ_5 \cot \theta_5 \quad (1)$$

$$Z_{INB} = Z_4 \frac{Z_{INA} + jZ_4 \tan \theta_4}{Z_4 + jZ_{INA} \tan \theta_4} \quad (2)$$

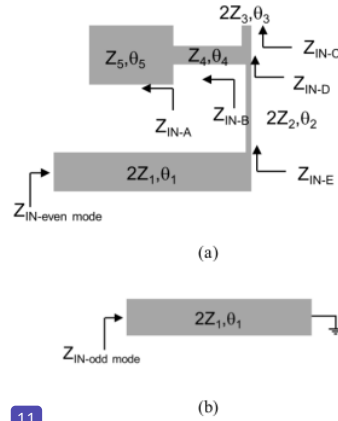


Fig. 2. (a) Equivalent circuit model for the even-mode of UWB-BPF, and (b) Equivalent circuit model for the odd-mode of UWB-BPF.

$$Z_{INC} = -j2Z_3 \cot \theta_3 \quad (3)$$

$$\frac{1}{Z_{IND}} = \frac{1}{Z_{INB}} + \frac{1}{Z_{INC}} \quad (4)$$

$$Z_{INE} = 2Z_2 \frac{Z_{IND} + j2Z_2 \tan \theta_2}{2Z_2 + jZ_{IND} \tan \theta_2} \quad (5)$$

$$Z_{IN-even mode} = 2Z_1 \frac{Z_{INE} + j2Z_1 \tan \theta_1}{2Z_1 + jZ_{INE} \tan \theta_1} \quad (6)$$

Equation (6) can also be expressed as:

$$Z_{IN-even mode} = \frac{2Z_1 A + j4Z_1^2 B \tan \theta_1}{2Z_1 B + jA \tan \theta_1} \quad (7)$$

with:

$$A = 2Z_2 Z_{IND} + j4Z_2^2 \tan \theta_2 \quad (8)$$

$$B = 2Z_2 + jZ_{IND} \tan \theta_2 \quad (9)$$

and:

$$Z_{IND} = \frac{P - Q}{R + S + T - U} \quad (10)$$

where:

$$P = 2Z_3 Z_4 Z_5 \cot \theta_3 \cot \theta_5 \quad (11)$$

$$Q = 2Z_3 Z_4^2 \cot \theta_3 \tan \theta_4 \quad (12)$$

$$R = j2Z_3 Z_4 \cot \theta_3 \quad (13)$$

$$S = j2Z_3 Z_5 \cot \theta_3 \cot \theta_5 \tan \theta_4 \quad (14)$$

$$T = jZ_4 Z_5 \cot \theta_5 \quad (15)$$

$$U = jZ_4^2 \tan \theta_4 \quad (16)$$

The resonant frequencies can be obtained when:

$$2Z_1 B + jA \tan \theta_1 = 0 \quad (17)$$

Analyzing the input impedance of odd-mode $Z_{IN-odd mode}$ can be derived:

$$Z_{IN-odd mode} = j2Z_1 \tan \theta_1$$

The resonant frequencies odd mode can be determined from impedance condition $Z_{IN} = \infty$. The condition of the structure is found as follows

$$\tan \theta_1 = \infty \quad (18)$$

$$\theta_1 = \frac{(2n-1)}{2} \pi; \text{ for } n = 1, 2, 3 \dots \quad (19)$$

Furthermore, the next step is to add the effect of the notch resonator.

B. Notch Band using Defected Microstrip Structure (DMS)

In order to remove unnecessary radio frequency (RF) signal, the rejection (notch) band was also proposed by using U-shaped defected microstrip structure (DMS). Moreover, the DMS [21] constructed at the center of crossed dumbbell resonator, as shown in Fig 3.

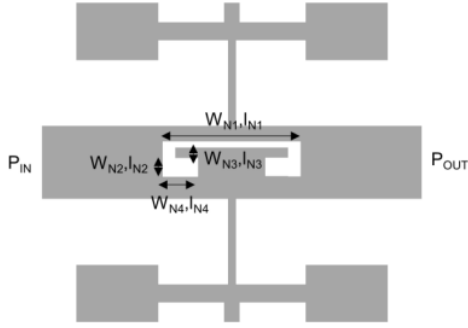


Fig. 3. The proposed defected microstrip structure (DMS) for notch band application

The W_{N1} , W_{N2} , W_{N3} , and W_{N4} , represent the width of the DMS resonator. The l_{N1} , l_{N2} , l_{N3} , and l_{N4} represent the length of the DMS resonator. The simulation and optimization is done by using The Momentum Advanced Design System (ADS). As a result, Fig 4 shows the insertion loss (S_{21}) response with varied W_{N3} (mm). Furthermore, Fig 5 shows the return loss (S_{11}) response with varied W_{N4} (mm). Fig 4. indicates that by increasing W_N , the frequency notch band is unchanged. However the value of S_{21} will increase slightly, but the attenuation is still lower than -15 dB.

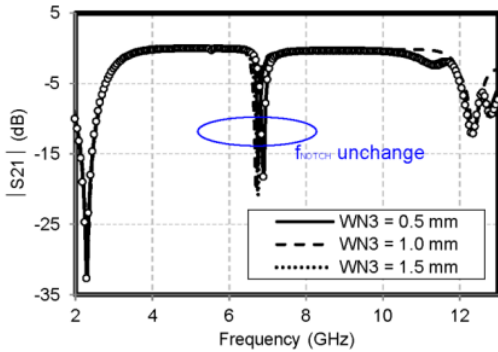


Fig 4. S_{21} (dB) response with varied W_{N3}

Fig 5 shows that by increasing W_{N3} the frequency notch band is still stable. However the frequency value at the lowest S_{11} will shift slightly, but the value of S_{11} has still lower than -30 dB. The figure also shows that the cutoff frequency at upper and lower band unchanged.

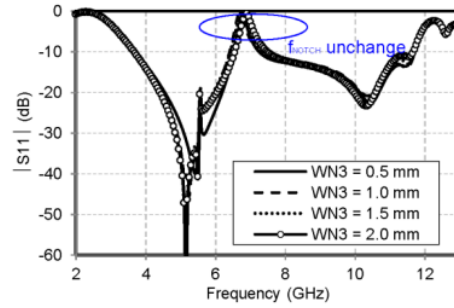


Fig 5. S_{11} (dB) response with varied W_{N3}

Furthermore, Fig 6 and Fig 7 show the S_{21} and S_{11} response with varied W_{N4} , respectively. The illustration from Fig 6, we can see that the frequency notch band is shifted independently. Although, there is a change in the notch band frequency, the upper and lower cut off frequency value remain stable. Therefore, the notch band frequency can be adjusted by modifying the U-shaped structure in term of W_{N4} . Moreover, the DMS method could produce the specific notch band without an expanded number of resonator or stub.

Moreover, Fig 7 shows the S_{11} (dB) response with varied W_{N4} . The data indicates that by increase W_{N4} , the frequency of the notch band will be shifted to higher frequency. It is interesting to note that, the change in the value of frequency notch band by varied W_{N4} was not accompanied by changes in the value of upper and lower frequency cutoff.

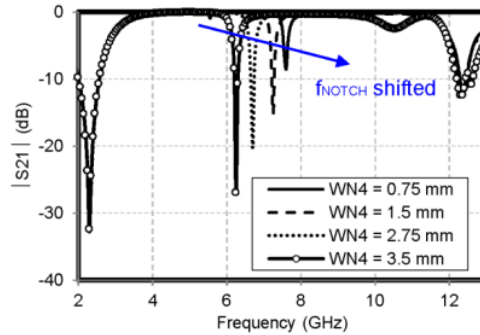


Fig 6. S_{21} (dB) response with varied W_{N4}

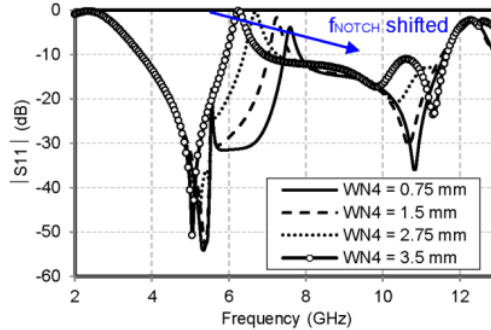


Fig 7. S_{11} (dB) response with varied W_{N4}

III. IMPLEMENTATION OF CROSSED DUMBBELL-STUB RESONATOR WITH NOTCH BAND USING DEFECTED MICROSTRIP STRUCTURE

To validate the propose method, the prototype of BPF has been designed, built, and tested as shown in Fig 8a and 8b. Fig 8a and 8b show the photograph of UWB-BPF and UWB-Notch BPF, respectively. This BPF is fabricated on 2D - Duroid/RT 5880 substrate with permittivity ϵ_r of 2.2, thickness h of 1.57 mm, and loss tangen $\tan\delta$ of 0.0009.


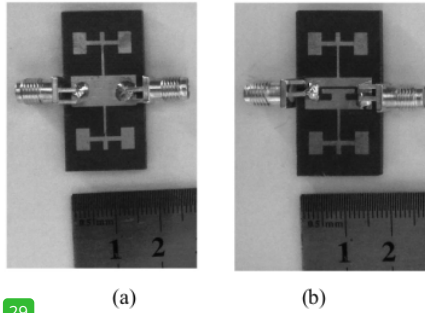


Fig 8. The photograph of (a) UWB-BPF and (b) UWB-Notch BPF.

Furthermore, after optimization, the following dimension of filter structure was fabricated: $W_1 = 7$ mm, $W_2 = 0.5$ mm, $W_3 = 1$ mm, $W_4 = 1$ mm, and $W_5 = 5$ mm. The $l_1 = 7.25$ mm, $l_2 = 7$ mm, $l_3 = 2$ mm, $l_4 = 3.5$ mm, and $l_5 = 3$ mm. Moreover, the size of $W_{N1} = 0.5$ mm, $W_{N2} = 0.75$ mm, $W_{N3} = 1$ mm, and $W_{N4} = 1.5$ mm, represent the width of the DMS resonator. The $l_{N1} = 8.5$ mm, $l_{N2} = 1.5$ mm, $l_{N3} = 2$ mm, and $l_{N4} = 2.75$.

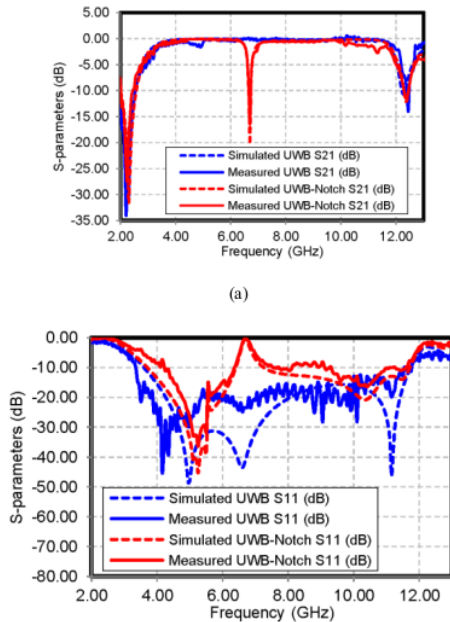

Figs. 9. Comparison of imulation and measurement results of (a) S_{21} , and (b) S_{11}

Fig 9 (a) shows the comparison between simulation and measurement S_{21} results achieved by the UWB-Notch BPF.

A VNA Rohde Schwarz VA67 was used to test the fabricated prototype. Both simulated and measured results of UWB-BPF have accomplished UWB requirements with a frequency range of 3.0 – 12.2 GHz. The S-parameters is slightly shifted due to the imperfection of soldering and pabrication process. Moreover, the measured result of UWB-Notch BPF has addition the notch band at 6.7 GHz with attenuation more than -20 dB. This notchband can be adjusted independently.

Fig 10(a) and 10(b) show the surface current distribution of lower band UWB-NotchBPF and upper band UWB-Notch BPF, respectively. The important information for the RF signal flows can be determined by plotting the surface current distribution. The surface current UWB-BPF has been investigated by Momentum-ADS. The surface current distribution at the lower frequency band has flowed at the lower resonator, as shown in Fig 10(a). Furthermore, the surface current distribution at the upper frequency band has flowed at the upper resonator as shown in Fig 10(b). Moreover, Table 1 summarizes the comparison of the proposed UWB-BPF.

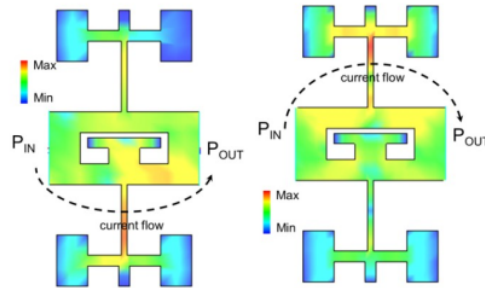


Fig. 10. Surface current distribution on of (a) lower band UWB-NotchBPF and (b) upper band UWB-Notch BPF.

Table 1. Summarizes the comparison of the proposed UWB-BPF

Ref	3 dB Pass-band (GHz)	ϵ_r / h	Notch freq (GHz)/attenuation (dB)	Structure / Independent notch	Size $\lambda_c \times \lambda_c$ (at 6.85 GHz)
[15]	3.1 – 10.6	2.2 / 0.78	5.22 / 20	2-D / no	0.61 x 0.50
[16]	3.0 – 10.8	2.2 / 0.50	8.1 / 20	2-D / no	0.55 x 0.35
[17]	3.6 – 10.2	10.8 / 0.63	5.6 / 15	2-D / no	0.82 x 0.17
[18]	2.8 - 10.8	2.65 / 1.0	5.47 / 20	2-D / no	0.82 x 0.36
[19]	2.6 - 10	3.15 / NA	6.4 / 8.0	3-D / no	1.36 x 0.32
Proposed 1	3.0 – 12.2	2.2 / 1.57	-	2-D / NA	0.42 x 0.84
Proposed 2	3.0 – 12.2	2.2 / 1.57	6.7 / 22	2-D / yes	0.42 x 0.84

NA = Not available

IV. CONCLUSION

A compact ultra wideband (UWB) bandpass filter based on cross dumbbell stub with notch band structures is successfully implemented, and measured. In order to remove unnecessary radio frequency (RF) signal, the rejection

(notch) band was also proposed by us in [10]. This BPF is fabricated on 2D - Duroid/RT 5880. The measured results show that the UWB-Notch has 3-dB passband from 3.0 – 12.2 GHz, with notchband at 6.7 GHz and the notch band has attenuation -22 dB. The design structure was verified by good agreement between simulated and measured result. In conclusion, the proposed filter design has excellent performance in term of insertion loss, high independent notch-band, compact size, and implementable structures.

33

ACKNOWLEDGMENT

The authors would like to thank Universitas Indonesia for funding through Hibah PIT9 Universitas Indonesia (UI), under contract No. NKB-0299/UN.R3.1/HKP.05.00/2019

REFERENCES

- [1] J. Liu, J. Lu, Z. He, T. Luo, X. Ying, and J. Zhao, "Super Compact Microstrip Uwb Bpf With Triple-Notched Bands," *Prog. Electromagn. Res. Lett.*, vol. 73, no. November 2017, pp. 61–67, 2018.
- [2] H. Peng, J. Zhao, and B. Wang, "Compact Microstrip Uwb Bandpass Filter With Triple-Notched Bands and Wide Upper Stopband," *Prog. Electromagn. Res.*, vol. 144, no. January, pp. 185–191, 2014.
- [3] J.-Q. H. and Q.-X. Chu, "Compact UWB Band-Pass Filter Utilizing Modified Composite Right/Left-Handed Structure With Cross Coupling," *Prog. Electromagn. Res. B*, vol. 29, pp. 269–288, 2011.
- [4] X. Li and X. Ji, "Novel compact UWB bandpass filters design with cross-coupling between $\lambda/4$ short-circuited stubs," *IEEE Microw. Wirel. Components Lett.*, vol. 24, no. 1, pp. 23–25, 2013.
- [5] A. Taibi, M. Trabelsi, A. Slimane, M. T. Belaroussi, and J. P. Raskin, "A novel design method for compact UWB bandpass filters," *IEEE Microw. Wirel. Components Lett.*, vol. 25, no. 1, pp. 4–6, 2015.
- [6] S. W. Lan, M. H. Weng, C. Y. Hung, and S. J. Chang, "Design of a Compact Ultra-Wideband Bandpass Filter with an Extremely Broad Stopband Region," *IEEE Microw. Wirel. Components Lett.*, vol. 26, no. 6, pp. 392–394, 2016.
- [7] M. S. Razalli, A. Ismail, M. A. Mahdi, and M. N. bin Hamidon, "Novel Compact Microstrip Ultra-Wideband Filter Utilizing Short-Circuited Stubs With Less Vias," *Prog. Electromagn. Res.*, vol. 88, pp. 91–104, 2008.
- [8] C. X. Zhou, P. P. Guo, K. Zhou, and W. Wu, "Design of a Compact UWB Filter with High Selectivity and Superwide Stopband," *IEEE Microw. Wirel. Components Lett.*, vol. 27, no. 7, pp. 636–638, 2017.
- [9] M. S. Razalli, A. Ismail, M. A. Mahdi, and M. N. bin Hamidon, "Novel Compact 'Via-Less' Ultra-Wide Band Filter Utilizing Capacitive Microstrip Patch," *Prog. Electromagn. Res.*, vol. 91, pp. 213–227, 2009.
- [10] Y. C. Yun, S. H. Oh, J. H. Lee, K. Choi, T. K. Chung, and H. S. Kim, "Optimal Design of a Compact Filter for UWB Applications Using an Improved Particle Swarm Optimization," *IEEE Trans. Magn.*, vol. 52, no. 3, pp. 1–4, 2016.
- [11] P.-Y. Hsiao and R.-M. Weng, "Compact Open-Loop UWB Filter With Notched Band," *Prog. Electromagn. Res. Lett.*, vol. 7, pp. 149–159, 2009.
- [12] F. Wei and L. Chen, "Compact UWB Bandpass Filter With Notched Band," *Prog. Electromagn. Res. C*, vol. 4, pp. 121–128, 2008.
- [13] N. Daryasafar, S. Hamidi, and G. R. Shahryari, "Design and analysis of an ultra-wideband band-notched band-pass filter," *J. Electr. Eng.*, vol. 66, no. 2, pp. 113–116, 2015.
- [14] H. Lin, X. Xia, Z. Guo, and T. Yang, "Compact Uwb Filter With High Selectivity and a Deep Notched Band," *Prog. Electromagn. Res. Lett.*, vol. 63, no. October, pp. 123–128, 2016.
- [15] R. Ghatak, P. Sarkar, R. K. Mishra, and D. R. Poddar, "A compact UWB bandpass filter with embedded SIR as band notch structure," *IEEE Microw. Wirel. Components Lett.*, vol. 21, no. 5, pp. 261–263, 2011.
- [16] J. Xu, W. Wu, W. Kang, and C. Miao, "Compact UWB bandpass filter with a notched band using radial stub loaded resonator," *IEEE Microw. Wirel. Components Lett.*, vol. 22, no. 7, pp. 351–353, 2012.
- [17] S. W. Wong and L. Zhu, "Implementation of compact UWB bandpass filter with a notch-band," *IEEE Microw. Wirel. Components Lett.*, vol. 18, no. 1, pp. 10–12, 2008.
- [18] G. M. Yang, R. Jin, C. Vittoria, V. G. Harris, and N. X. Sun, "Small Ultra-wideband (UWB) bandpass filter with notched band," *IEEE Microw. Wirel. Components Lett.*, vol. 18, no. 3, pp. 176–178, 2008.
- [19] Zhang-Cheng Hao and Jia-Sheng Hong, "Compact UWB Filter With Double Notch-Bands Using Multilayer LCP Technology," *IEEE Microw. Wirel. Components Lett.*, vol. 19, no. 8, pp. 500–502, 2009.
- [20] T. Firmansyah, S. Praptodinyo, R. Wiryadinata, S. Suhendar, S. Wardoyo, A. Alimuddin, C. Chairunissa, M. Alaydrus, and G. Wibisono, "Dual-wideband band pass filter using folded cross-stub stepped impedance resonator," *Microw. Opt. Technol. Lett.*, vol. 59, no. 11, 2017.
- [21] T. Firmansyah, S. Praptodiyono, A. S. Pramudyo, C. Chairunissa, and M. Alaydrus, "Hepta-band bandpass filter based on folded cross-loaded stepped impedance resonator," *Electron. Lett.*, vol. 53, no. 16, 2017.
- [22] H. Wu and R. Yang, "A New Quad-Band Bandpass Filter Using Asymmetric Stepped Impedance Resonators," vol. 21, no. 4, pp. 203–205, 2011.

Compact UWB Bandpass Filter based on Crossed Dumbbell-Stub with Notch Band using Defected Microstrip Structure

ORIGINALITY REPORT

18%

SIMILARITY INDEX

7%

INTERNET SOURCES

17%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

- 1 Sun, A.-F., Y.-Z. Yin, Y. Yang, B.-W. Liu, and S.-H. Jing. "Compact UWB bandpass filter with two notched bands based on electromagnetic bandgap structures", *Electronics Letters*, 2011.
Publication 1%
- 2 Mohd Sazid, N. S. Raghava, Abu Nasar Ghazali. "UWB - BPF based on broadside coupled technology with triple - notched passband", *Microwave and Optical Technology Letters*, 2023
Publication 1%
- 3 Xuemei Zheng, Yuwen Pan, Tao Jiang. "UWB Bandpass Filter with Dual Notched Bands Using T-Shaped Resonator and L-Shaped Defected Microstrip Structure", *Micromachines*, 2018
Publication 1%
- 4 Dan Feng, Huiqing Zhai, Lei Xi, Kedi Zhang, Dong Yang. "A new filter antenna using 1%

improved stepped impedance hairpin resonator", Microwave and Optical Technology Letters, 2017

Publication

5

Louazene, Hassiba, Mouloud Challal, and M'hamed Boulakroune. "Compact Ultra-Wide Band Bandpass Filter Design Employing Multiple-Mode Resonator and Defected Ground Structure", Procedia Computer Science, 2015.

Publication

1 %

6

Ahmed, Kafil U., and Bal S. Virdee. "Ultra-Wideband Bandpass Filter Based on Composite Right/Left Handed Transmission-Line Unit-Cell", IEEE Transactions on Microwave Theory and Techniques, 2013.

Publication

1 %

7

Huaxia Peng, Junding Zhao, Bing Wang. "COMPACT MICROSTRIP UWB BANDPASS FILTER WITH TRIPLE-NOTCHED BANDS AND WIDE UPPER STOPBAND", Progress In Electromagnetics Research, 2014

Publication

1 %

8

Seyyed Jamal Borhani, Mohammad Amin Honarvar. "A NOVEL COMPACT SIZE UWB BANDPASS FILTER WITH SHARP REJECTION SKIRT AND WIDE UPPER-STOPBAND BASED

1 %

ON MULTIPLE-MODE-RESONATOR", Progress In Electromagnetics Research C, 2013

Publication

9

dokumen.tips

Internet Source

1 %

10

technodocbox.com

Internet Source

1 %

11

Cheng Huang, Jiakun Song, Chen Ji, Jianing Yang, Xiangang Luo. "Simultaneous Control of Absorbing Frequency and Amplitude Using Graphene Capacitor and Active Frequency Selective Surface", IEEE Transactions on Antennas and Propagation, 2020

Publication

<1 %

12

Palantei, E., L. Ramos Emakarim, A. Nugraha, and N. K. Subaer. "Optimized wideband horn antennas of high gain and directivity", 2010 International Conference on Electromagnetics in Advanced Applications, 2010.

Publication

<1 %

13

www.abcelectronique.com

Internet Source

<1 %

14

Chun-Xia Zhou, Pei-Pei Guo, Kang Zhou, Wen Wu. "Design of a Compact UWB Filter With High Selectivity and Superwide Stopband", IEEE Microwave and Wireless Components Letters, 2017

Publication

<1 %

15 Sarkar, Pankaj, Rowdra Ghatak, and D. R. Poddar. "A compact UWB bandpass filter with multiple notch band using open circuited stub", 2011 IEEE Applied Electromagnetics Conference (AEMC), 2011. <1 %
Publication

16 oaktrust.library.tamu.edu <1 %
Internet Source

17 www.linknovate.com <1 %
Internet Source

18 Janardan Sahay, Sanjay Kumar. "Compact reconfigurable triple notch ultra-wideband bandpass filter for cognitive radio system", International Journal of Computational Vision and Robotics, 2020 <1 %
Publication

19 Sharmili Adhikari, Ishita Rakshit, Manimala Pal, Pankaj Sarkar, Rowdra Ghatak. "An UWB band pass filter with a notch band using stub loaded multi-mode resonator", 2012 5th International Conference on Computers and Devices for Communication (CODEC), 2012 <1 %
Publication

20 www.jurnalet.com <1 %
Internet Source

21

"Computational Intelligence Methods for Green Technology and Sustainable Development", Springer Science and Business Media LLC, 2023

Publication

<1 %

22

J. Xu, B. Li, H. Wang, C. Miao, W. Wu. "Compact UWB Bandpass Filter with Multiple Ultra Narrow Notched Bands", Journal of Electromagnetic Waves and Applications, 2012

Publication

<1 %

23

Jun Yang, Peng Wang, Sheng Gao, Guangsheng Deng, Hongbo Lu, Weien Lai, Zhiping Yin, Ying Li, Yaohui Hu. "Tunable Terahertz Transmission Properties of Double-Layered Metal Hole-Loop Arrays Using Nematic Liquid Crystal", Journal of Infrared, Millimeter, and Terahertz Waves, 2019

Publication

<1 %

24

Ping Zhang, Liqin Liu, Deli Chen, Min-Hang Weng, Ru-Yuan Yang. "Application of a Stub-Loaded Square Ring Resonator for Wideband Bandpass Filter Design", Electronics, 2020

Publication

<1 %

25

Sandip Kumar, Ravi Dutt Gupta, Manoj Singh Parihar. "Multiple Band Notched Filter Using C-Shaped and E-Shaped Resonator for UWB

<1 %

Applications", IEEE Microwave and Wireless Components Letters, 2016

Publication

26

Zhang, Xiu Yin, Yao-Wen Zhang, and Quan Xue. "Compact Band-Notched UWB Filter Using Parallel Resonators With a Dielectric Overlay", IEEE Microwave and Wireless Components Letters, 2013.

Publication

<1 %

27

computerresearch.org

Internet Source

<1 %

28

go.gale.com

Internet Source

<1 %

29

Chen, Liang, Xiaoyan Zhang, and Bian Wu. "Compact UWB bandpass filter with dual notched bands using cascaded shorted-stub loaded SIRS", 2013 5th IEEE International Symposium on Microwave Antenna Propagation and EMC Technologies for Wireless Communications, 2013.

Publication

<1 %

30

Haiwen Liu, Baoping Ren, Xuehui Guan, Pin Wen, Yan Wang. "Quad-Band High-Temperature Superconducting Bandpass Filter Using Quadruple-Mode Square Ring Loaded Resonator", IEEE Transactions on Microwave Theory and Techniques, 2014

Publication

<1 %

31 I.T.E. Elfergani, M. Sajedin, J. Rodriguez, R.A. Abd Alhameed, A. Iqbal, A. Abdulkhaleq, C. Zebiri. "Compact design of reconfigurable bandpass filter for heterogeneous wireless", Antennas and Propagation Conference 2019 (APC-2019), 2019

Publication

<1 %

32 Mehdi Nosrati, Nahid Vahabisani, Mojgan Daneshmand. "Compact MEMS-Based Ultrawide-Band CPW Band-Pass Filters With Single/Double Tunable Notch-Bands", IEEE Transactions on Components, Packaging and Manufacturing Technology, 2014

Publication

<1 %

33 Parastoo Taghikhani. "Hybrid Beamforming Transmitter Modeling for Millimeter-Wave MIMO Applications", Institute of Electrical and Electronics Engineers (IEEE), 2020

Publication

<1 %

34 S. Kundu, A. Chatterjee, S. K. Jana, S. K. Parui. "A Compact Umbrella-Shaped UWB Antenna with Gain Augmentation Using Frequency Selective Surface", Radioengineering, 2018

Publication

<1 %

35 Shan-Shan Gao, Shao-Qiu Xiao, Bing-Zhong Wang. "Compact UWB Bandpass Filter with a Notched Band", 2008 IEEE MTT-S International Microwave Workshop Series on Art of

<1 %

Miniaturizing RF and Microwave Passive Components, 2008

Publication

36

Siddhant Dey, Sanjukta Tamang, Pankaj Sarkar, Manimala Pal, Rowdra Ghatak. "An ultra-wideband bandpass filter using multi stub resonator with notch band functionality", 2015 International Conference on Signal Processing and Communication Engineering Systems, 2015

Publication

<1 %

37

Weng, Min-Hang, Wei-Yu Chen, Siang-Wen Lan, Shoou-Jinn Chang, Hon-Kuan, and Yi-Hsin Su. "A high selectivity and wide stopband UWB bandpass filter using asymmetric SIRs with split-end", Microwave and Optical Technology Letters, 2014.

Publication

<1 %

38

Yingsong Li, Wenxing Li, Qiubo Ye. "A CPW-Fed Circular Wide-Slot UWB Antenna with Wide Tunable and Flexible Reconfigurable Dual Notch Bands", The Scientific World Journal, 2013

Publication

<1 %

39

fdocuments.in

Internet Source

<1 %

40

www2.ia-engineers.org

Internet Source

<1 %

41

Md. Rashedul Islam, Mohammad Tariquul Islam, Md. Moniruzzaman, Md. Samsuzzaman, Badariah Bais, Haslina Arshad, Ghulam Muhammad. "Square Enclosed Circle Split Ring Resonator Enabled Epsilon Negative (ENG) Near Zero Index (NZI) Metamaterial for Gain Enhancement of Multiband Satellite and Radar Antenna Applications", Results in Physics, 2020

Publication

<1 %

42

Milad Mirzaee, Bal S. Virdee, Sima Noghianian. "Compact ultra-wideband bandpass filter with variable notch characteristics based on transversal signal-interaction concepts", International Journal of RF and Microwave Computer-Aided Engineering, 2014

Publication

<1 %

43

Yadgar I Abdulkarim, Lianwen Deng, Heng Luo, Shengxiang Huang et al. "Electromagnetic simulations of polarization-insensitive and wide-angle multiband metamaterial absorber by incorporating double asterisk resonator", Bulletin of Materials Science, 2020

Publication

<1 %

44

www.scielo.br
Internet Source

<1 %

Exclude quotes Off

Exclude matches Off

Exclude bibliography On