

# 2

*by* Adhi Priyambodho

---

**Submission date:** 07-Mar-2023 01:15PM (UTC+0700)

**Submission ID:** 2031003551

**File name:** 1\_Effects\_of\_UrbanDevelopment\_on\_Regional\_Climate\_Change\_and.pdf (522.51K)

**Word count:** 7510

**Character count:** 41793

Paper:

# Effects of Urban Development on Regional Climate Change and Flood Inundation in Jakarta, Indonesia

Bambang Adhi Priyambodoho<sup>\*1</sup>, Shuichi Kure<sup>\*1,†</sup>, Nurul Fajar Januriyadi<sup>\*2</sup>,  
Mohammad Farid<sup>\*3</sup>, Alvin Christopher Galang Varquez<sup>\*4</sup>, Manabu Kanda<sup>\*4</sup>, and So Kazama<sup>\*5</sup>

<sup>\*1</sup>Toyama Prefectural University  
5180 Kurokawa, Imizu, Toyama 939-0398, Japan  
<sup>†</sup>Corresponding author, E-mail: kure@pu-toyama.ac.jp

<sup>\*2</sup>Universitas Pertamina, Jakarta, Indonesia  
<sup>\*3</sup>Institut Teknologi Bandung, Bandung, Indonesia  
<sup>\*4</sup>Tokyo Institute of Technology, Tokyo, Japan  
<sup>\*5</sup>Tohoku University, Sendai, Japan

[Received September 7, 2021; accepted February 24, 2022]

Flood risks associated with changes in land use and climate are a common concern, especially in relation to their potential effects on many cities around the world. Jakarta is a typical urbanized Asian city in Indonesia where flooding presents a consistent challenge. This study aimed to quantify the effects of land use and climate change using a flood inundation model to analyze future urban growth and climate change scenarios. The projected rainfall data of RCP2.6-SSP1 and RCP8.5-SSP3, based on the WRF simulation, were used as inputs for rainfall-runoff and flood inundation simulations in Jakarta. In addition, RCP2.6 and RCP8.5, without urban development scenarios, were investigated to determine the effects of urbanization in Jakarta. The results showed that rainfall intensity, peak discharge, and flood inundation generally increased in the high RCP and SSP future scenarios. Significantly, the RCP2.6-SSP1 scenario showed a higher peak discharge value than RCP8.5, owing to the combination of land-use change and increased rainfall. We conclude that the effects of urban development on atmospheric and runoff processes should be considered in climate change studies in urban areas.

**Keywords:** flood inundation model, Indonesia, Jakarta, climate change, urban development

## 1. Introduction

Floods are natural disasters that cause major disruptions to human activities, and their frequency has increased in recent years. In the past, the city of Jakarta has experienced many floods, and after 2013, floods have been occurring almost every year [1]. The 2013 flood resulted in more than 40 deaths, 45,000 refugees, and significant economic damage [2]. More than 60 people were killed during the most recent flood that occurred in Jan-

uary 2020, despite several countermeasures being implemented in the city [1]. Extreme and destructive flooding events may become more frequent in the future, owing to a combination of urbanization in the upstream region and climate change effects.

Many studies have projected that extreme precipitation will increase in tropical regions in the future (Scoccimarro et al. [3], Kure and Tebakari [4], Iwami et al. [5], Yamamoto et al. [6]). However, the projected urban area will grow by 66% by 2050 (United Nations [7]), which could lead to an altered percentage of urban areas, thereby increasing the area of the impervious zone. This condition could amplify the direct runoff (Leavesley et al. [8], Legesse et al. [9]). Thus, a flood mitigation plan that considers land-use change regulations and climate change adaptation is needed. Hence, a detailed future climate change impact assessment is required to consider future urban development.

The impacts of urbanization on precipitation extremes and flood risks in the catchment were analyzed by observations and numerical simulations (Burian and Shepherd [10], Gu et al. [11], Feng et al. [12]). Burian and Shepherd [10] indicated that diurnal rainfall distribution had changed significantly in urban areas, especially in the afternoon during the warm season, based on a comparison of the pre- and post-urban rainfall patterns. Feng et al. [12] investigated the sensitivities of urban flooding to urban land growth by simulating flood flows under different urbanization conditions and during different flooding stages based on HEC-HMS and HEC-RAS analyses. They concluded that urbanization creates higher surface runoff and river discharge rates, along with shortened times to achieve peak runoff and discharge. As such, urbanization may impact both extreme precipitation events and river flood characteristics.

In Jakarta, several studies have focused on urban development and climate change. Farid et al. [13, 14] and Moe et al. [15] reported that urbanization in the Ciliwung River Basin in Jakarta contributed to an increase in river flow.



Land subsidence problems due to urbanization in Jakarta were analyzed by Abidin et al. [16] and Park et al. [17]. Takagi et al. [18] projected the extent of coastal flooding in Jakarta by the year 2050, considering the sea level rise and land subsidence and reported that between 2000 and 2050, the potential extent of flooding would increase by 110.5 km<sup>2</sup>, mainly due to land subsidence. Budiyo et al. [19] estimated future flood damage costs in Jakarta based on numerical simulations of climate change and urban development scenarios. Combining all future scenarios, they simulated the median increase in risk as 180% by 2030. Januriyadi et al. [20] showed that the combination of climate change and urban development could amplify the mean flood risk in the future by 322%–402% by 2050 in Jakarta, with a confidence interval of 95%. Notably, the difference in the increased risks between Budiyo et al. [19] and Januriyadi et al. [20] is due to the different methods for estimating the asset values used in their research [20].

Many previous studies have conducted climate change impact analyses in Jakarta, considering future climate and land use changes, land subsidence, and sea level rise. In addition, several flood studies have been conducted in Jakarta, including flood inundation prediction [1, 14, 21], land use/cover change impact analysis [13, 15, 22], and future climate change projections [20]. However, the effects of urban development on the atmospheric environments of cities have not been considered in many previous flood and climate change studies conducted in Jakarta or in urban cities across the world. Local urbanization is expected to affect the atmospheric environments of megacities owing to the changing urban thermal environments, such as the heat island phenomena; however, this effect has not been quantitatively evaluated in previous studies. In general, local urbanization was considered only for land-use changes in runoff and flood inundation simulations. Darmanto et al. [23] coupled global climate change with distributed urbanization scenarios, based on projections of future urban morphology and anthropogenic heat emissions in a mesoscale weather model. They projected future air temperatures and rainfall in Jakarta, considering both climate change and local urbanization. However, Darmanto et al. [23] focused only on the projected air temperature, and the projected rainfall was not analyzed in the previous study [18]. The effects of future changes on flood inundation, as a result of climate change and local urbanization in cities require detailed investigations. In this study, we aimed to quantify the effects of both land use and climate change on future rainfall and flood inundation in Jakarta, based on future urban growth and climate change scenarios.

## 2. Study Area

Jakarta, officially known as the Special Capital Region of Jakarta, is the capital and largest city in Indonesia, with a population of approximately 9.6 million. Central Jakarta is home to the national and provincial governments of

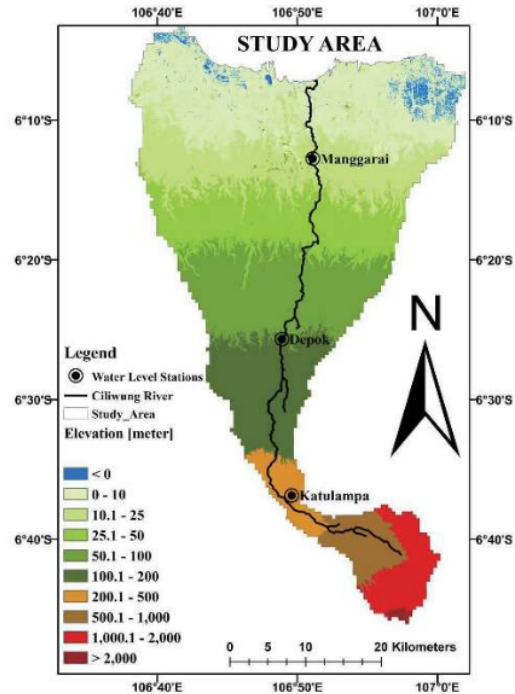


Fig. 1. Study area [1].

Greater Jakarta.

The rainy season in Jakarta begins in November and ends in March, and the peak rainfall intensity mostly occurs in January and February. Thirteen major rivers flow northward through Jakarta, into the Java Sea. The main river in Jakarta is the Ciliwung River with an upstream area in Mount Pangrango and a downstream area in Jakarta. The target area selected for this study included Jakarta and the Ciliwung River Basin, with a total area of 1346.6 km<sup>2</sup>, as shown in Fig. 1. Five rainfall stations and three river water level stations are shown in Fig. 1. Hourly rainfall data from the stations were used for bias correction of the projected rainfall data, and the locations of the three water level stations were used as the peak discharge evaluation points, as discussed in later sections.

The area containing the city and its surroundings is almost entirely covered by urbanized zones; however, forested and agricultural areas can be found in the middle and upper regions of the target area. Many of these forested and agricultural areas are expected to be converted into urbanized areas in the near future [22].

## 3. Methodology

Figure 2 shows the schematic representation of the research method used in this study. The details are explained below.



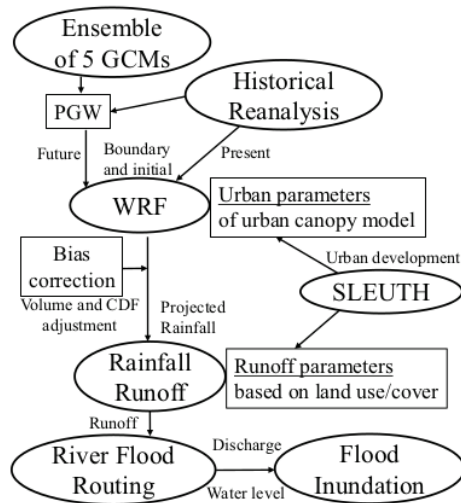


Fig. 2. Schematic representation of the method.

### 3.1. Future Projected Rainfall

Darmanto et al. [23] simulated the present and future urban climate in Jakarta, based on high-resolution 1-km regional climate modeling. The high-rainfall seasons in the present (2006–2015) and future (2046–2055) climates were simulated using the Weather Research and Forecasting (WRF) model, coupled with a modified version of the single-layer urban canopy model to represent important urban morphological parameters. In this single-layer urban canopy model, the estimations of the bulk transfer coefficients for each building facet have been revised, based on the simple urban energy model for mesoscale simulation (SUMM). In addition, actual urban fractions were considered rather than the constant values used in the default WRF model. Further descriptions of the modified WRF can be found in [23].

For future conditions, four scenarios were used, so that the month of January, in the last 10 years of the historical period, and the next 40 years (10 years × 4 scenarios), could be simulated in the WRF runs. For the present simulation, the historical re-analysis data of the NCEP-FNL were used for the boundary and initial conditions of the WRF simulation.

The future global climate scenario was downscaled using a pseudo global warming (PGW) method with ensembles of five CMIP5 global climate models (GCMs), namely HadGEM2-ES, IPSL-CM5A-LR, MIROC-ESM-CHEM, NorESM1-M, and GFDL-ESM2M as inputs for RCP2.6 and RCP8.5. The PGW is a non-direct downscaling delta approach used to realize finer resolution and effective performance of future climate projections using a mesoscale regional climate model (Kimura and Kitoh [24]). This method has been validated in several studies. Using this approach, we considered the 10-year average of the future climate values of each GCM in Jan-

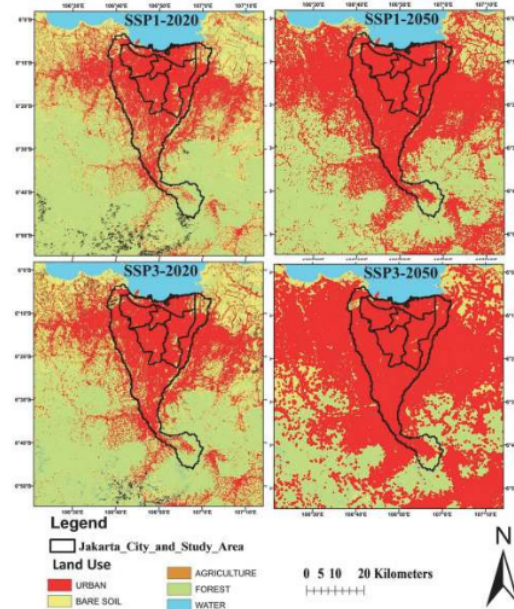


Fig. 3. Land use/cover in 2020 and 2050 (SSP1 and SSP3).

uary during the period 2046–2055. The values necessary for the PGW method include the three-dimensional wind components (3- and 6-hourly), temperature components (3-hourly, 6-hourly, daily, and monthly), pressure components (6-hourly), and humidity components (3-hourly, 6-hourly, and monthly). Ensemble averaging was performed for each meteorological component value from 2046–2055. The ensemble averages were subtracted from those for 2006–2015. The difference in the ensembles was added to the meteorological boundaries of the historical NCEP-FNL to be used as the meteorological boundary for 2046–2055. The specific details of the PGW method can be found in Kimura and Kitoh [24].

RCP2.6 and RCP8.5 were selected considering the best and worst emission scenarios, respectively. Urban parameters were projected based on the socio-demographic parameters from SSP1 and SSP3. SSP1 presents lower challenges for mitigation (resource efficiency) and adaptation (rapid development). In contrast, SSP3 presents high challenges for mitigation (regionalized energy/land policies) and adaptation (slow development) [25].

We employed two urban expansion scenarios based on the SLEUTH model, namely, compact and business-as-usual (BaU) adaptation strategies, where the compact scenario was derived from SSP1 and the BaU scenario was derived from SSP3 (Fig. 3). Details of the SLEUTH model are explained in the next section. The urban ratios of SSP1 and SSP3 in 2050 were 0.89 and 0.93, respectively. The urbanization rate in the study area was high; therefore, there were no significant differences between SSP1 and SSP3 in the study area [22]. Global and ur-

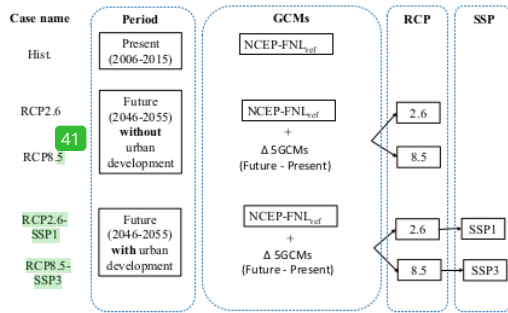


Fig. 4. Experiment cases.

banization scenarios were then coupled in the WRF simulation runs. In addition, RCP2.6 and RCP8.5 were simulated without urban development. Finally, rainfall data were projected for future periods, based on four scenarios (RCP2.6, RCP8.5, RCP2.6-SSP1, and RCP8.5-SSP3) and the historical period [23]. Fig. 4 summarizes the experimental cases used in this study.

A bias correction was conducted for projected rainfall to obtain a realistic magnitude of the rainfall in the basin and flood discharge in the rivers because the rainfall data of the downscaled NCEP-FNL by the WRF simulation had a bias in volume and frequency compared to the observed data. It is noted that the NCEP-FNL is historical re-analysis data simulated considering historical atmospheric observations, but rainfall values have biases at the local basin scale. First, the monthly rainfall volume in the historical and future periods was adjusted based on the values of the observation rainfall data for 30 years, as used in a previous study [20]. The volume adjustment was conducted as there was an over-estimation of the simulated monthly rainfall volume compared with the observed rainfall, which might be due to the accuracy of the NCEP-FNL re-analysis data at the basin scale in Jakarta and the short span of the simulation period used for the analysis (10 years). It is noted that the bias information of the previous study was used in this study because it was obtained from much longer simulation periods (30 years). Second, the empirical cumulative distribution function (CDF) for the downscaled historical GCMs and hourly observed rainfall data for 10 years (2006–2015) were calculated, and the projected rainfall bias was corrected using the inverse of the CDF of GCMs with observation distribution parameters [20] to adjust the frequency of high-intensity rainfall. These adjustments were extended to the future projected rainfall data. This bias correction was based on CDF analysis for the rainfall intensity distribution to adjust the frequency and magnitude of extreme rainfall events in the historical period. However, it was noted that further analysis and bias correction based on the longer simulation periods of WRF simulations were required because the 10-year simulation periods were too short to compute long-term climate situations.

After this bias correction, the projected rainfall data

were used as inputs for the rainfall-runoff and flood inundation models to project future flood inundation situations.

### 3.2. Future Land Use and Cover Change

SLEUTH is a tool that can predict urban growth by using historical slope, land use, exclusion, urban growth, transportation, and hill shade data (SLEUTH; Dietzel and Clarke [26]). All C language source codes, libraries, and sample data for SLEUTH computations are available for downloading through Project Gigalopolis [27]. SLEUTH has been applied to many cities (e.g., Guan and Rowe [28]). In this study, urban growth was determined according to the assumption that historical urbanization levels would be maintained [14]. Marquez et al. [29] applied SLEUTH to Jakarta under the RCP8.5-SSP3 (BaU) and RCP2.6-SSP1 (compact-growth) scenarios, and the resulting projected land-use/cover maps were employed in this study. It should be emphasized that land-use projections for future periods ignored social and infrastructural developments, such as land reclamation in the northern coastal area of Jakarta, high-speed railways, and any scenario related to future conservation efforts in the city and upstream regions.

This study also used land-use/cover maps for 2050, based on the RCP8.5-SSP3 and RCP2.6-SSP1 scenarios for rainfall-runoff and flood inundation simulations, by changing the runoff model parameters based on land use/cover changes [15]. Fig. 2 shows the land use/cover maps for 2020 and 2050 (RCP2.6-SSP1 and RCP8.5-SSP3). Land subsidence in Jakarta, which affects inland and coastal flooding, was not considered in this study.


### 3.3. Rainfall Runoff and Flood Inundation Model

We modeled flood inundation in Jakarta based on rainfall-runoff [30,31] and flood inundation modeling [21]. The flood inundation model comprised a rainfall-runoff module for each sub-basin, a hydrodynamic module for rivers and canal networks, and a flood inundation module for flood plains. Rainfall-runoff and flood inundation models were applied to the 2013 flood event based on radar rainfall data and validated against observations [15]. For the model validations, the high Nash Index of 0.75 and 0.95 at Depok and Katulampa stations and correlation coefficients of 0.8 and 0.81, respectively, were simulated in the river discharge comparisons. Additionally, the visual-graph comparisons between the simulated flood inundation distribution and the observed inundation map indicated an acceptable agreement, as shown in Fig. 5 [15]. The observed flooded area data were provided by the Badan Penanggulangan Bencana Daerah (BPBD), the Jakarta Province Regional Disaster Management Agency.

Here, we quantified the agreement based on the following fit index [32]:

$$\text{Fit} [\%] = \frac{IA_{obs} \cap IA_{sim}}{IA_{obs} \cup IA_{sim}}, \dots \dots \dots (1)$$



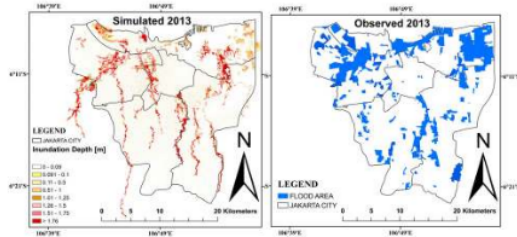


**Fig. 5.** Comparison of the simulated (left) and observed (right) inundation areas [15].

where  $IA_{sim}$  is the inundated pixels predicted by the model (we assumed a depth greater than 0.1 m as the simulated flood extent in this study) and  $IA_{obs}$  is the identified flooded pixels by the observation map. To obtain the area of the  $IA_{obs}$ , the map shown in **Fig. 5** was digitized and converted to a raster dataset with the same grid size as the model simulation. From Eq. (1), the fit value was 0.21, which was relatively low. For this reason, it should be emphasized that the observed flooded area was based on eyewitness reports in each district by government officers during the flood event and interviews with local residents after the event, although there were some uncertainties. For example, only a small area was actually inundated, but the entire district was judged as the inundated zone in **Fig. 5**. In addition, there were discrepancies between the reported and simulated inundation areas, particularly in the northern and northeastern areas. This may have been caused by the numerous local fish ponds in these areas. The local fish ponds were initially filled with water, but this initial water was not captured by the land-use map used in this study, leading to the under-estimation of the flood inundation simulation.


It should be noted that the rainfall-runoff model used in this study is assumed to be applied to mountain regions [30, 31], so that it can be improved to represent urban flooding in lowland areas in Jakarta. In addition, the flood inundation model needs to be improved to simulate local urban situations like sediment deposition and low embankment points, along with zones in canals and rivers. However, to consider these urban effects and local situations, fine-resolution DEM and river cross-sectional data are required.

These calibrated models and parameters were validated based on their application to other historical flood events [34] in 2015 to 2020 [1]. It is noted that satellite-driven rainfall data were used as the input to the model in these simulations because the weather radar in Jakarta used in the model calibration was not operated and the radar rainfall data were not available after 2014 because of its high maintenance cost. Even when using satellite-driven rainfall data, acceptable simulation results were reported by Priyambodoho et al. [1]; thus, we concluded that the model and parameters were applicable not only to historical floods but also for future projected flood events.

During the model application to the 2013 event, soil

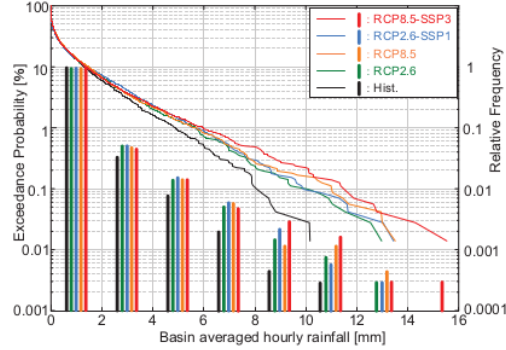

**Fig. 6.** Comparison of the relative frequencies of hourly rainfall in each scenario.

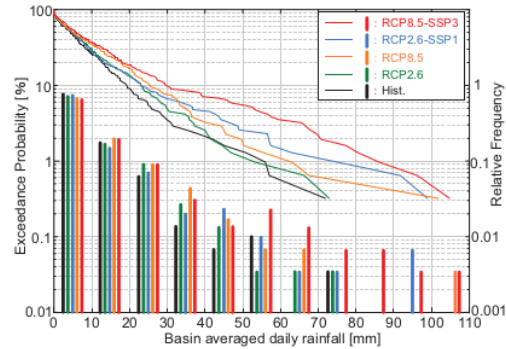

**Fig. 7.** Comparison of the daily total rainfall exceedance probability in each scenario.

parameter values, such as the soil depth and saturated hydraulic conductivity, were calibrated based on four classes of land cover (forest, cropland, paddy field, and urban area). Forty sub-basins in the study area were analyzed for rainfall-runoff simulations. Four land cover ratios for the 6 sub-basins were calculated using the SLEUTH model under the RCP2.6-SSP1 and RCP8.5-SSP3 scenarios. Moreover, future land use changes were considered in the rainfall-runoff simulations.

## 4. Results

In this study, we focused on the effects of urban development on rainfall and flood inundation in Jakarta. Hence, the differences between RCP2.6, RCP2.6-SSP1, RCP8.5, and RCP8.5-SSP3 were considered as the urbanization effects, and the results were mainly evaluated based on the hourly and daily time scales.

### 4.1. Rainfall Comparisons

Figures 6 and 7 show a comparison of the relative frequency and changes in the exceedance probability of

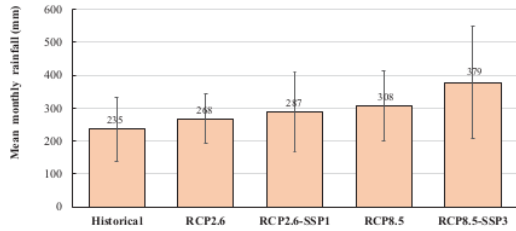


Fig. 8. Comparison of the average monthly rainfall in each scenario.

hourly and daily rainfall in the target area and over the studied time periods. The projected rainfall was spatially and temporally averaged over the target area in January over 10 years in both historical and future periods. Generally, high rainfall was projected toward high RCP and SSP scenarios. The RCP8.5-SSP3 scenario was found to show the highest rainfall intensity. RCP2.6-SSP1 and RCP8.5-SSP3 showed higher rainfall values with higher probabilities than RCPs alone. Fig. 8 shows the monthly rainfall in both the historical and future periods under each scenario. In this figure, the error bars for each scenario show the 95% confidence intervals. Monthly rainfall clearly increased in the high RCP and SSP scenarios. The average monthly rainfall of RCP2.6-SSP1 was approximately 7% higher than that of RCP2.6, whereas that of RCP8.5-SSP3 was approximately 23% higher than that of RCP8.5. As such, the increase in rainfall in RCP8.5-SSP3 was significant compared to that in RCP2.6-SSP1.

#### 4.2. Flood Peak Discharge Comparisons

Figure 9 shows comparisons of the hourly simulated peak river discharge at the three stations (Fig. 1) of the Chiliung River during both the historical and future periods under each scenario. As shown in the figure, the peak discharge generally increased toward the high RCP and SSP scenarios in the future, owing to the high rainfall and land use change. Significantly, RCP2.6-SSP1 showed higher peak discharge values than RCP8.5, owing to the combination of land-use change and increased rainfall.

#### 4.3. Flood Inundation Comparisons

Figure 10 shows a comparison of the 10-year average of the annual maximum flood inundation depths and the computed values of the flooded volumes. The simulated annual maximum flood inundation depths were averaged for each grid during this period. The difference between the cases with and without SSPs is shown in the figure. A high maximum flood inundation depth was computed for the RCP8.5-SSP3. However, in a simulated event from RCP2.6-SSP1, a large inundation on the west side of Jakarta was observed, as shown in Fig. 10. Hence, the spatial distribution of rainfall is also important for analysis, but only this case showed high rainfall in West Jakarta. Moreover, the ensemble numbers of the simulations may have to be increased to analyze the spatial

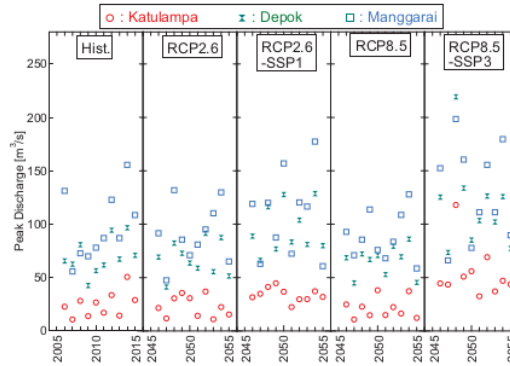



Fig. 9. Comparison of simulated peak river discharge at 3 stations in each scenario.

distribution pattern of rainfall. The largest flood inundation was simulated under the RCP8.5-SSP3 scenario and the second largest flood inundation was simulated under the RCP2.6-SSP1 scenario but not in RCP8.5, because urban development was not considered in the RCP8.5-only scenario.


Figure 11 summarizes the monthly rainfall, runoff, and flood inundation volumes for both historical and future periods under each scenario. In Fig. 10, the flood inundation volume [m<sup>3</sup>] is computed by multiplying the inundation depth [m] at each grid and inundation area [m<sup>2</sup>]. The largest flood inundation was simulated under the RCP8.5-SSP3 scenario, and the second largest flood inundation was simulated under the RCP2.6-SSP1 scenario, but not RCP8.5, owing to the urban development that had not been considered in the RCP8.5-only scenario. These simulation results clearly indicate that the urban development scenario should be considered in the climate change assessment of cities, not only for atmospheric conditions, but also for flood inundation situations. We conclude that the combined effects of urban development on the atmosphere and flooding should be considered in the climate change analysis of cities.

#### 5. Discussion

In this study, the effects of urban development on the atmosphere and flood inundation were discussed. Jakarta and its surroundings are highly urbanized areas, and convective rainfall typically occurs in the urban areas of humid tropical regions. Additionally, the heat island phenomenon has been progressing significantly in Jakarta; moreover, the urban thermal influence on the background environment of convective rainfall prevails in the region [33]. This type of heat island effect has not been considered in many previous climate change studies, because of the difficulties in modeling urban heat environments in course grid simulations. In this study, urban development was considered for both the rainfall and flood projections.

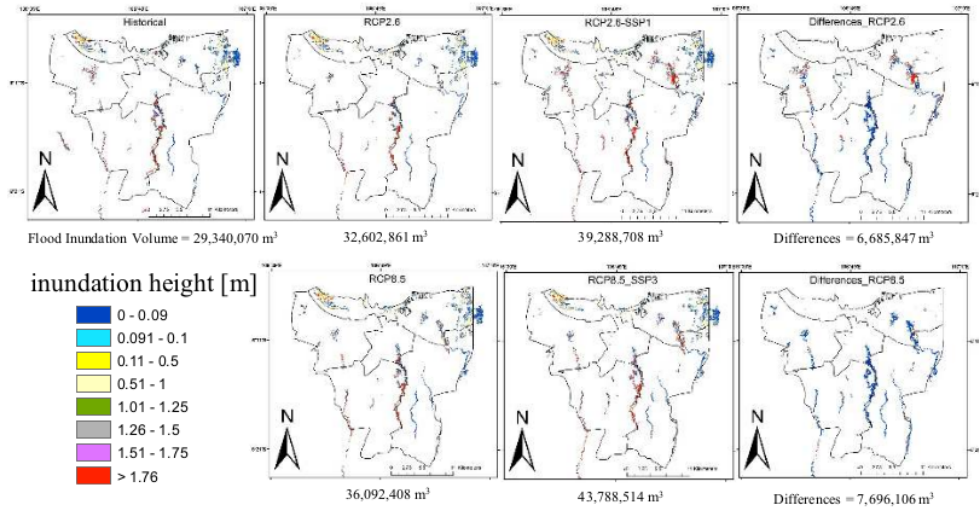

**Fig. 10.** Comparison of the simulated 10 years averaged maximum flood inundation depths in each scenario and the differences of w/w SSPs.

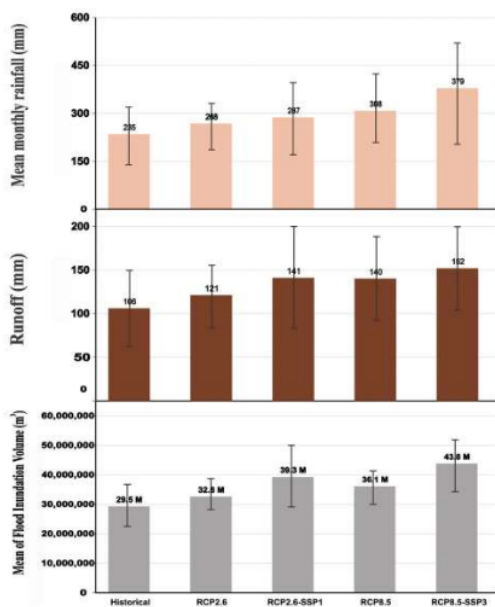

**Fig. 11.** Comparison of average monthly rainfall with the simulated runoff and flood inundations in each scenario.

From [45] comparisons with and without SSPs (Figs. 6 and 7), it is evident that the extreme rainfall events of the hourly and daily time scales were enhanced due to urbanization. These urbanization and heat island impacts on rainfall were reported from several previous stud-

ies [34, 35]. Urban land-use changes also lead to high river flood discharges in urbanized areas. The peak river flood discharge and inundation volume in RCP2.6-SSP1 were larger than those in RCP8.5 (Figs. 9–11). Moe et al. [15] analyzed the impact of land use change on flood inundation without considering climate change and reported that the flood inundation volume increased from approximately 30 Mm<sup>3</sup> in 2013 to 35 Mm<sup>3</sup> in 2050. We assumed that only land-use changes may have contributed to the 5 Mm<sup>3</sup> increase in flood inundation. In the current study, much higher increases were computed while comparing RCP2.6-SSP1, RCP2.6 (6.7 Mm<sup>3</sup>), and Historical (10 Mm<sup>3</sup>); these increases were also observed while comparing RCP8.5-SSP3, RCP8.5 (7.7 Mm<sup>3</sup>), and Historical (14.5 Mm<sup>3</sup>) as specified in Fig. 8. It can be inferred from the results herein and in Moe et al. [15] that the urbanization impacts on atmospheric rainfall contributed to the flood inundation volume of 1.7 Mm<sup>3</sup> in RCP2.6, 2.7 Mm<sup>3</sup> in RCP8.5. We assumed that if land use change could increase the flood inundation volume by 5 Mm<sup>3</sup>, as reported by Moe et al., then a similar increase was applicable in this study. These increases amount to approximately 5%–10% of the current flood inundation volume; hence, we speculated that the urban development effects on the increases in rainfall would contribute to an increase in the flood inundation volume by approximately 5%–10% in a target area. Based on these results, urban development was found to affect increase in rainfall because of changes in the urban thermal environment and flood inundation associated with land use and rainfall changes in the future.

However, in this study, simulations for only a 10-year period were performed within a scenario owing to the requirement of extremely heavy computations for high-resolution urban atmospheric simulations. Thus, the rel-



atively large flood inundation result on the west side of Jakarta was only simulated under RCP2.6-SSP1. However, only ten events were insufficient for discussing the spatial distribution patterns of rainfall. Moreover, because of the smaller number of ensemble members in future projections, we could not analyze the statistical significance of future changes caused by urban development. In future studies, the simulation period must be increased to evaluate the uncertainty of the impact of future climate and urban development in Jakarta. Furthermore, the statistical significance and more physical patterns, such as the spatial distribution of rainfall, must be assessed, and a more realistic bias correction that may be applicable under future land use and urban environment situations, should be evaluated.

## 6. Conclusions

In this study, future flood inundation scenarios were projected, considering both climate change and the effects of urban development. The future projected rainfall data RCP2.6 and RCP8.5, without urban development, and RCP2.6-SSP1 and RCP8.5-SSP3, based on the WRF simulation, were used as inputs for the rainfall-runoff and flood inundation simulations in Jakarta. Future land use change was also considered in the rainfall-runoff simulations based on the SLEUTH model outputs in Jakarta and surrounding areas in 2050. Based on the results of this analysis, urban development was clearly seen to increase not only the rainfall intensity and volume in the future, but also the runoff from the basin, river flow discharges, and flood inundations in Jakarta. This happened due to the combination of land use change and increased rainfall. We conclude that the effects of urban development on both atmospheric and runoff processes should be considered in climate change studies in cities.

10

### Acknowledgments

This research was supported by the Environment Research and Technology Development Fund (JPMEERF15S11415) of the Environmental Restoration and Conservation Agency of Japan. Hourly observed rainfall data in Jakarta were provided by BMKG Indonesia under the support of the ITB. We appreciate both BMKG and ITB.

### References:

- [1] B. A. Priyambodoho, S. Kure, R. Yagi, and N. F. Januriyadi, "Flood Inundation Simulations based on GSMaP Satellite Rainfall Data in Jakarta, Indonesia," *Prog. Earth Planet. Sci.*, Vol.8, Article No.34, 2021.
- [2] J. D. Bricker, R. Tsubaki, A. Muhari, and S. Kure, "Causes of the January 2013 canal embankment failure and urban flood in Jakarta, Indonesia," *J. of Japan Society of Civil Engineers, Ser. B1 (Hydraulic Engineering)*, Vol.70, No.4, pp. 91-96, doi: 10.2208/jscejhe.70.L91, 2014.
- [3] E. Scoccimarro, S. Gualdi, A. Bellucci, M. Zampieri, and A. Navarra, "Heavy precipitation events in a warmer climate: Results from CMIP5 Models," *J. of Climate*, Vol.26, No.20, pp. 7902-7911, doi: 10.1175/JCLI-D-12-00850.1, 2013.
- [4] S. Kure and T. Tebakari, "Hydrological impact of regional climate

- change in the Chao Phraya River Basin, Thailand," *Hydrological Research Letters*, Vol.6, pp. 53-58, doi: 10.3178/HLR.6.53, 2012.
- [5] Y. Iwami, A. Hasegawa, M. Miyamoto, S. Kudo, Y. Yamazaki, T. Ushiyama, and T. Koike, "Comparative study on climate change impact on precipitation and floods in Asian riverbasins," *Hydrological Research Letters*, Vol.11, No.1, pp. 24-30, doi: 10.3178/HLR.11.24, 2017.
- [6] K. Yamamoto, T. Sayama, and Apip, "Impact of climate change on flood inundation in a tropical river basin in Indonesia," *Progress in Earth and Planetary Science*, Vol.8, Article No.5, doi: 10.1186/s40645-020-00386-4, 2021.
- [7] Department of Economic and Social Affairs, Population Division, United Nations, "World Urbanization Prospects: The 2014 Revision, Highlights," *ST/ESA/SER.A/352*, 2014.
- [8] G. H. Leavesley, R. W. Lichty, B. M. Troutman, and L. G. Saindon, "Precipitation-runoff modeling system; user's manual," *Water-Resources Investigations Report 83-4238*, U.S. Geological Survey, Water Resources Division, 1983.
- [9] D. Legesse, C. Vallet-Coulomb, and F. Gasse, "Hydrological response of a catchment to climate and land use changes in Tropical Africa: case study South Central Ethiopia," *J. of Hydrology*, Vol.275, Nos.1-2, pp. 67-85, doi: 10.1016/S0022-1694(03)00019-2, 2003.
- [10] S. J. Burian and J. M. Shepherd, "Effect of urbanization on the diurnal rainfall pattern in Houston," *Hydrol. Process.*, Vol.19, No.5, pp. 1089-1103, 2005.
- [11] X. Gu, Q. Zhang, J. Li, V. P. Singh, and P. Sun, "Impact of urbanization on nonstationarity of annual and seasonal precipitation extremes in China," *J. of Hydrology*, Vol.575, pp. 638-655, 2019.
- [12] B. Feng, Y. Zhang, and R. Bourke, "Urbanization impacts on flood risks based on urban growth data and coupled flood models," *Natural Hazards*, Vol.106, pp. 613-627, doi: 10.1007/s11069-020-04480-0, 2021.
- [13] M. Farid, A. Mano, and K. Udo, "Modeling flood runoff response to land cover change with rainfall spatial distribution in urbanized catchment," *J. of Japan Society of Civil Engineers, Ser. B1 (Hydraulic Engineering)*, Vol.67, No.4, pp. L19-L24, doi: 10.2208/jscejhe.67.L19, 2011.
- [14] M. Farid, A. Mano, and K. Udo, "Urban Flood Inundation Model for High Density Building Area," *J. Disaster Res.*, Vol.7, No.5, pp. 554-559, 2012.
- [15] I. R. Moe, S. Kure, N. F. Januriyadi, M. Farid, K. Udo, S. Kazama, and S. Koshimura, "Future Projection of Flood Inundation Considering Land Use Change and Land Subsidence in Jakarta, Indonesia," *Hydrological Research Letters*, Vol.11, No.2, pp. 99-105, 2017.
- [16] H. Z. Abidin, H. Andreas, I. Gumilar, Y. Fukuda, Y. E. Pohan, and T. Deguchi, "Land subsidence of Jakarta (Indonesia) and its relation with urban development," *Natural Hazards*, Vol.59, No.3, pp. 1753-1771, doi: 10.1007/s11069-011-9866-9, 2011.
- [17] H. Park, S. Kwon, and S. Hadi, "Land Subsidence Survey and Policy Development in Pantai Mutiara, Jakarta Bay, Indonesia," *J. of Coastal Research, Special Issue No.75*, pp. 1447-1451, 2016.
- [18] H. Takagi, M. Esteban, T. Mikami, and D. Fuji, "Projection of coastal floods in 2050 Jakarta," *Urban Climate*, Vol.17, pp. 135-145, 2016.
- [19] Y. Budiyo, J. C. J. H. Aerts, D. Tollenaar, and J. Ward, "River flood risk in Jakarta under scenarios of future change," *Natural Hazards and Earth System Sciences*, Vol.16, No.3, pp. 757-774, 2016.
- [20] N. F. Januriyadi, S. Kazama, I. R. Moe, and S. Kure, "Evaluation of future flood risk in Asian megacities: A case study of Jakarta," *Hydrological Research Letters*, Vol.12, No.3, pp. 14-22, 2018.
- [21] I. R. Moe, S. Kure, N. F. Januriyadi, M. Farid, K. Udo, S. Kazama, and S. Koshimura, "Effect of Land Subsidence on Flood Inundation in Jakarta, Indonesia," *J. of Japan Society of Civil Engineers, Ser. G (Environment)*, Vol.72, No.5, pp. L283-L289, 2016.
- [22] B. A. Priyambodoho, S. Kure, I. R. Moe, and S. Kazama, "Numerical Experiments of Future Land Use Change for Flood Inundation in Jakarta, Indonesia," *J. of Japan Society of Civil Engineers, Ser. G (Environment)*, Vol.74, No.5, pp. L265-L271, 2018.
- [23] N. S. Darmanto, A. C. G. Varquez, N. Kawano, and M. Kanda, "Future urban climate projection in a tropical megacity based on global climate change and local urbanization scenarios," *Urban Climate*, Vol.29, Article No.100482, 2019.
- [24] F. Kimura and A. Kitoh, "Downscaling by Pseudo Global Warming Method," *The Final Report of IPCC*, pp. 43-46, 2007.
- [25] K. Riahi et al., "The Shared Socioeconomic Pathways and their energy, land use, and greenhouse gas emissions implications: An overview," *Global Environmental Change*, Vol.42, pp. 153-168, 2017.
- [26] C. Dietzel and K. Clarke, "The effect of disaggregating land use categories in cellular automata during model calibration and forecasting," *Computers, Environment and Urban Systems*, Vol.30, No.1, pp. 78-101, doi: 10.1016/j.compenurbysys.2005.04.001, 2006.

- [27] USGS, PROJECT GIGALOPOLIS, 2010, <http://www.ncgia.ucsb.edu/projects/gig/> [accessed February 17, 2017]
- [28] C. Guan and P. G. Rowe, "Should big cities grow? Scenario-based cellular automata urban growth modeling and policy applications," *J. of Urban Management*, Vol.5, pp. 65-78, doi: 10.1016/j.jum.2017.01.002, 2016.
- [29] C. G. A. Varques, N. Darmanto, N. Kawano, S. Takakuwa, M. Kanda, and Z. Xin, "Representative urban growing scenarios for future climate models," *J. of Japan Society of Civil Engineers, Ser. B1 (Hydraulic Engineering)*, Vol.73, No.4, pp. L103-L108, 2017.
- [30] S. Kure and T. Yamada, "Nonlinearity of runoff and estimation of effective rainfall in a slope," *Proc. of the 2nd Asia Pacific Association of Hydrology and Water Resources Conf.*, Vol.2, pp. 76-85, 2004.
- [31] S. Kure, A. Watanabe, Y. Akabane, and T. Yamada, "Field Observations of Discharge and Runoff Characteristics in Urban Catchments Area," *Proc. of the 11th Int. Conf. on Urban Drainage*, pp. 1-10, 2008.
- [32] P. D. Bates and A. P. J. De Roo, "A simple raster-based model for flood inundation simulation," *J. of Hydrology*, Vol.236, Nos.1-2, pp. 54-77, 2000.
- [33] H. Sugawara, R. Oda, and N. Seino, "Urban Thermal Influence on the Background Environment of Convective Precipitation," *J. of the Meteorological Society of Japan, Ser. II*, Vol.96A, pp. 67-76, 2018.
- [34] M. Yu, Y. Liu, and S. Miao, "Impact of urbanization on rainfall of different strengths in the Beijing area," *Theoretical and Applied Climatology*, Vol.139, Nos.3-4, pp. 1097-1110, 2020.
- [35] J. Singh, S. Karmakar, D. PaiMazumder, S. Ghosh, and D. Niyogi, "Urbanization alters rainfall extremes over the contiguous United States," *Environ. Res. Lett.*, Vol.15, Article No.074033, 2020.



**Name:**  
Bambang Adhi Priyambodoho

**Affiliation:**  
Lecturer, Department of Civil Engineering, Sultan Ageng Tirtayasa University

**Address:**  
Jl. Raya Palka Km 3 Sindang Sari, Pabuaran, Kab. Serang Provinsi Banten, Banten 42124, Indonesia

**Brief Career:**  
2001- Undergraduate Student, Gadjah Mada University  
2007- Graduate Student, Diponegoro University  
2009- Lecturer, Department of Civil Engineering, Sultan Ageng Tirtayasa University

**Selected Publications:**

- "Numerical Experiments of Future Land Use Change for Flood Inundation in Jakarta, Indonesia," *J. of Japan Society of Civil Engineers, Ser. G (Environment)*, Vol.74, No.5, pp. L265-L271, 2018.
- "Relationship between Flood Inundation Flow and Building Damage Due to Flood Disaster at Chikuma River in Nagano Prefecture in 2019," *J. of Japan Society of Civil Engineers, Ser. B1 (Hydraulics)*, Vol.76, No.2, pp. L619-L624, 2020.
- "Flood inundation simulations based on GSMaP satellite rainfall data in Jakarta, Indonesia," *Progress in Earth and Planetary Science*, Vol.8, Article No.34, 2021.

**Academic Societies & Scientific Organizations:**

- Indonesian Association of Hydraulics Engineers (HATHI)



**Name:**  
Shuichi Kure

**Affiliation:**  
Associate Professor, Department of Environmental and Civil Engineering, Toyama Prefectural University

**Address:**  
5180 Kurokawa, Imizu, Toyama 939-0398, Japan

**Brief Career:**  
2003- Graduate School of Science and Engineering, Chuo University  
2008- Research Fellow, University of California, Davis  
2012- Assistant Professor, International Research Institute of Disaster Science, Tohoku University  
2016- Associate Professor, Department of Environmental and Civil Engineering, Toyama Prefectural University

**Selected Publications:**

- "Future projection of flood inundation considering land-use changes and land subsidence in Jakarta, Indonesia," *Hydrological Research Letters*, Vol.11, No.2, pp. 99-105, 2017.
- "WEHY-HCM for Modeling Interactive Atmospheric-Hydrologic Processes at Watershed Scale: II. Model Application to Ungauged and Sparsely-gauged Watersheds," *J. of Hydrologic Engineering*, Vol.18, No.10, pp. 1272-1281, 2013.
- "Hydrologic Impact of Regional Climate Change for the Snowed and Glacierfed River Basins in the Republic of Tajikistan: Hydrological Response of flow to Climate Change," *Hydrological Processes*, Vol.27, No.26, pp. 4057-4070, 2013.

**Academic Societies & Scientific Organizations:**

- Japan Society of Civil Engineers (JSCE)
- Japan Society of Hydrology and Water Resources (JSHWR)
- Japan Society for Natural Disaster Science (JSNDS)



**Name:**  
Nurul Fajar Januriyadi

**Affiliation:**  
Lecturer, Department of Civil Engineering, Universitas Pertamina

**Address:**  
Jalan Teuku Nyak Arief Simprug, Jakarta Selatan, Jakarta 12220, Indonesia

**Brief Career:**  
2018- Department of Civil Engineering, Universitas Pertamina

**Selected Publications:**

- "Flood Inundation Simulations Based on GSMaP Satellite Rainfall Data in Jakarta, Indonesia," *Progress in Earth and Planetary Science*, Vol.8, Article No.34, 2021.
- "Effectiveness of Structural and Nonstructural Measures on the Magnitude and Uncertainty of Future Flood Risks," *J. of Water Resource and Protection*, Vol.12, No.5, pp. 401-415, 2020.
- "Evaluation of future flood risk in Asian megacities: a case study of Jakarta," *Hydrological Research Letters*, Vol.12, No.3, pp. 14-22, 2018.

**Academic Societies & Scientific Organizations:**

- Indonesian Association of Hydraulic Engineers (HATHI)



**Name:**  
Mohammad Farid

**Affiliation:**  
Assistant Professor, Faculty of Civil and Environmental Engineering, Institut Teknologi Bandung

**Address:**  
Jalan Ganesha 10, Bandung 40132, Indonesia

**Brief Career:**  
2008- Graduate School of Engineering, Tohoku University  
2015- Institut Teknologi Bandung  
2019- Head, Center for Coastal and Marine Development, Institut Teknologi Bandung  
2020- Head, Water Resources Engineering Laboratory, Institut Teknologi Bandung

**Selected Publications:**

- "Modeling Flood Runoff Response to Land Cover Change with Rainfall Spatial Distribution in Urbanized Catchment," J. of Japan Society of Civil Engineers, Ser. B1 (Hydraulic Engineering), Vol.67, No.4, pp. L19-L24, 2011.
- "Urban Flood Inundation Model for High Density Building Area," J. Disaster Res., Vol.7, No.5, pp. 554-559, 2012.
- "Study on Effectiveness of Flood Control based on Risk Level: Case Study of Kampung Melayu Village and Bukit Duri Village," MATEC Web Conf., Vol.101, 05003, 2017.
- "Assessment of Flood Risk Reduction in Bengawan Solo River: A Case Study of Sragen Regency," Int. J. of Geomate, Vol.18, No.70, pp. 229-234, 2020.

**Academic Societies & Scientific Organizations:**

- Indonesian Association of Hydraulics Engineers (HATHI)



**Name:**  
Manabu Kanda

**Affiliation:**  
Professor, Department of International Development Engineering, Tokyo Institute of Technology

**Address:**  
2-12-1 Ookayama, Meguro-ku, Tokyo 152-8552, Japan

**Brief Career:**  
1991- Research Associate, Department of Civil Engineering, Tokyo Institute of Technology  
1993- Assistant Professor, Department of Civil Engineering, Yamaguchi University  
1995- Associate Professor, Department of International Development Engineering, Tokyo Institute of Technology  
2010- Professor, Department of International Development Engineering, Tokyo Institute of Technology

**Selected Publications:**

- "Urban roughness parameters estimation from globally available datasets for mesoscale modeling in megacities," Int. J. of Urban Climate, Vol.21, pp. 243-261, 2017.
- "Global anthropogenic heat flux database with high spatial resolution," Atmospheric Environment, Vol.150, pp. 276-294, 2017.
- "A new parameterization of mixing length in an urban canopy derived from a large-eddy simulation database for Tokyo," Boundary-Layer Meteorology, Vol.156, No.1, pp. 131-144, 2015.

**Academic Societies & Scientific Organizations:**

- International Association for Urban Climate (IAUC)
- Japan Society of Hydrology and Water Resources (JSHWR)
- Japan Society of Civil Engineers (JSCE)



**Name:**  
Alvin Christopher Galang Varquez

**Affiliation:**  
Associate Professor, Department of Transdisciplinary Science and Engineering, Tokyo Institute of Technology

**Address:**  
2-12-1 Ookayama, Meguro-ku, Tokyo 152-8552, Japan

**Brief Career:**  
2009- Part-Time Lecturer, Department of Civil Engineering, De La Salle-University  
2014 Received Doctor of Engineering from Department of International Development Engineering, Tokyo Institute of Technology  
2014-2015 Post-Doctoral Researcher, JSPS Postdoctoral Fellowship for Overseas Researchers, Tokyo Institute of Technology  
2015-2020 Adjunct Lecturer, Department of Transdisciplinary Science and Engineering, Tokyo Institute of Technology  
2020- Associate Professor, Department of Transdisciplinary Science and Engineering, Tokyo Institute of Technology

**Selected Publications:**

- "Global anthropogenic heat flux database with high spatial resolution," Atmospheric Environment, Vol.150, pp. 276-294, 2017.
- "The effects of highly detailed urban roughness parameters on a sea-breeze numerical simulation," Boundary-Layer Meteorology, Vol.154, No.3, pp. 449-469, 2015.
- "Future increase in elderly heat-related mortality of a rapidly growing Asian megacity," Scientific Reports, Vol.10, Article No.9304, 2020.

**Academic Societies & Scientific Organizations:**

- Japan Society of Civil Engineers (JSCE)
- American Geophysical Union (AGU)
- Japan Society for Engineering Education (JSEE)



**Name:**  
So Kazama

**Affiliation:**  
Professor, Department of Civil Engineering, Tohoku University

**Address:**  
6-6-06 Aza-Aoba, Aramaki, Aoba-ku, Sendai, Miyagi 980-8579, Japan

**Brief Career:**  
1955- Institute of Engineering Mechanics, University of Tsukuba  
1997- School of Civil Engineering, Asian Institute of Technology  
1999- Department of Civil and Environmental Engineering, Tohoku University

**Selected Publications:**

- "Evaluation of future flood risk in Asian megacities: A case of Jakarta," Hydrological Research Letters, Vol.12, No.3, pp. 14-22, doi: 10.3178/hrl.12.14, 2018.
- "Uncertainty of adaptation measures in addressing future risks in a megacity," J. of Water Resource and Protection, Vol.12, No.5, pp. 401-415, doi: 10.4236/jwarp.2020.125024, 2020.

**Academic Societies & Scientific Organizations:**

- Japan Society of Civil Engineers (JSCE)
- Japan Society of Hydrology and Water Resources (JSHWR)
- Japan Society on Water Environment (JSWE)



## ORIGINALITY REPORT

13%

SIMILARITY INDEX

7%

INTERNET SOURCES

12%

PUBLICATIONS

4%

STUDENT PAPERS

## PRIMARY SOURCES

---

1	<a href="http://www.jstage.jst.go.jp">www.jstage.jst.go.jp</a> Internet Source	1%
2	T. Weber, P. Bowyer, D. Rechid, S. Pfeifer, F. Raffaele, A. R. Remedio, C. Teichmann, D. Jacob. "Analysis of Compound Climate Extremes and Exposed Population in Africa Under Two Different Emission Scenarios", <i>Earth's Future</i> , 2020 Publication	1%
3	Submitted to Oregon State University Student Paper	1%
4	<a href="http://www.researchgate.net">www.researchgate.net</a> Internet Source	1%
5	Hiroshi Takagi, Miguel Esteban, Takahito Mikami, Daisuke Fujii. "Projection of coastal floods in 2050 Jakarta", <i>Urban Climate</i> , 2016 Publication	1%
6	Yujie Liu, Jie Chen, Tao Pan, Yanhua Liu, Yuhu Zhang, Quansheng Ge, Philippe Ciais, Josep Penuelas. "Global Socioeconomic Risk of	1%

---

# Precipitation Extremes Under Climate Change", Earth's Future, 2020

Publication

---

7	<a href="http://www.nat-hazards-earth-syst-sci.net">www.nat-hazards-earth-syst-sci.net</a> Internet Source	1 %
8	T. Weber, P. Bowyer, D. Rechid, S. Pfeifer, F. Raffaele, A. R. Remedio, C. Teichmann, D. Jacob. "Analysis of Compound Climate Extremes and Exposed Population in Africa under two different Emission Scenarios", Earth's Future, 2020 Publication	1 %
9	<a href="http://city-airport-taxis.com">city-airport-taxis.com</a> Internet Source	<1 %
10	<a href="http://confit.atlas.jp">confit.atlas.jp</a> Internet Source	<1 %
11	<a href="http://issuu.com">issuu.com</a> Internet Source	<1 %
12	Hiroyuki Kusaka, Akifumi Nishi, Mayumi Mizunari, Hitoshi Yokoyama. "Urban impacts on the spatiotemporal pattern of short - duration convective precipitation in a coastal city adjacent to a mountain range", Quarterly Journal of the Royal Meteorological Society, 2019 Publication	<1 %

---

13	Taichi Tebakari, Sanit Wongsas, Yoshiaki Hayashi. "Floods in Southern Thailand in December 2016 and January 2017", Journal of Disaster Research, 2018 Publication	<1 %
14	Zhao Liu, Bruce Anderson, Kai Yan, Weihua Dong, Hua Liao, Peijun Shi. "Global and regional changes in exposure to extreme heat and the relative contributions of climate and population change", Scientific Reports, 2017 Publication	<1 %
15	link.springer.com Internet Source	<1 %
16	ijtech.eng.ui.ac.id Internet Source	<1 %
17	repository.tudelft.nl Internet Source	<1 %
18	Global Change – The IGBP Series, 2006. Publication	<1 %
19	hdl.handle.net Internet Source	<1 %
20	"Global Drought and Flood", Wiley, 2021 Publication	<1 %
21	Gizem Mestav Sarica, Tinger Zhu, Wei Jian, Edmond Yat-Man Lo, Tso-Chien Pan. "Spatio-temporal dynamics of flood exposure in	<1 %



Shenzhen from present to future",  
Environment and Planning B: Urban Analytics  
and City Science, 2021

Publication

22

[www.nature.com](http://www.nature.com)

Internet Source

<1 %

23

[ciesin.columbia.edu](http://ciesin.columbia.edu)

Internet Source

<1 %

24

[www.tandfonline.com](http://www.tandfonline.com)

Internet Source

<1 %

25

"Study on the Characteristics of Rainfall  
Runoff in the Kinugawa River Basin and the  
Evacuation Behavior of the Residents at the  
Time of Kanto and Tohoku Flood Disaster in  
September, 2015", Journal of Disaster  
Research, 2017

Publication

<1 %

26

S R Taufik, M Yatrib, A N Harman, T N A  
Kesuma, D Saputra, M S B Kusuma.

"Assasment of flood hazard reduction in DKI  
Jakarta: Bendungan Hilir Village", IOP  
Conference Series: Earth and Environmental  
Science, 2022

Publication

<1 %

27

Shuichi Kure, Taichi Tebakari, Mamoru  
Miyamoto. "Review of Recent Water-Related  
Disasters and Scientific Activities in Southeast

<1 %

Asia: Lessons Learned and Future Challenges for Disaster Risk Reduction", Journal of Disaster Research, 2016

Publication

---

28

Supattana Wichakul, Yasuto Tachikawa, Michiharu Shiiba, Kazuaki Yorozu. "River discharge assessment under a changing climate in the Chao Phraya River, Thailand by using MRI-AGCM3.2S", Hydrological Research Letters, 2015

Publication

---

<1 %

29

Yang Ratri Savitri, Ryuji Kakimoto, Rawshan Ara Begum, Nadjadji Anwar, Wasis Wardoyo, Erma Suryani. "The Application of AHP to Determine the Priority Drainage System on Flood Mitigation in Surabaya – Indonesia", Journal of Disaster Research, 2022

Publication

---

<1 %

30

Yujie Liu, Jie Chen. "Future global socioeconomic risk to droughts based on estimates of hazard, exposure, and vulnerability in a changing climate", Science of The Total Environment, 2021

Publication

---

<1 %

31

Daisuke Goto, Yukio Maeda, Hideaki Tanaka, Kazuya Kato, Takanori Yazawa. "Influence of Tool Run-Out on Machining Accuracy with

<1 %

Multi-Tooth Endmill", International Journal of Automation Technology, 2016

Publication

---

32

Giang Tran Huong Nguyen, Hikari Shimadera, Katsushige Uranishi, Tomohito Matsuo, Akira Kondo. "Numerical assessment of PM2.5 and O3 air quality in Continental Southeast Asia: Impacts of potential future climate change", Atmospheric Environment, 2019

Publication

---

<1 %

33

M Farid, D Saputra, T R Maitsa, T N A Kesuma, A A Kuntoro, A Chrysanti. "Relationship between extreme rainfall and design flood-discharge of the Ciliwung river", IOP Conference Series: Earth and Environmental Science, 2021

Publication

---

<1 %

34

Mathew J. Lipson, Marcus Thatcher, Melissa A. Hart, Andrew Pitman. "A building energy demand and urban land surface model", Quarterly Journal of the Royal Meteorological Society, 2018

Publication

---

<1 %

35

Qiongfang Li, Tao Cai, Meixiu Yu, Guobin Lu, Wei Xie, Xue Bai. "Investigation into the Impacts of Land-Use Change on Runoff Generation Characteristics in the Upper

<1 %



Huaihe River Basin, China", Journal of Hydrologic Engineering, 2013

Publication

36

[edepot.wur.nl](http://edepot.wur.nl)

Internet Source

<1 %

37

[progearthplanetosci.org](http://progearthplanetosci.org)

Internet Source

<1 %

38

[www.mdpi.com](http://www.mdpi.com)

Internet Source

<1 %

39

Han-San Park. "Land Subsidence Survey and Analysis Using the Terrestrial LIDAR in Jakarta Bay, Indonesia", Journal of the Korean Society of Marine Environment & Safety, 2013

Publication

<1 %

40

Hiroyuki KUSAKA, Fujio KIMURA. "Coupling a Single-Layer Urban Canopy Model with a Simple Atmospheric Model: Impact on Urban Heat Island Simulation for an Idealized Case", Journal of the Meteorological Society of Japan, 2004

Publication

<1 %

41

Max Tesselaar, W. J. Wouter Botzen, Toon Haer, Paul Hudson, Timothy Tiggeoven, Jeroen C. J. H. Aerts. "Regional Inequalities in Flood Insurance Affordability and Uptake under Climate Change", Sustainability, 2020

Publication

<1 %

42

Ming-Jui Chang, Hsiang-Kuan Chang, Yun-Chun Chen, Gwo-Fong Lin, Peng-An Chen, Jihn-Sung Lai, Yih-Chi Tan. "A Support Vector Machine Forecasting Model for Typhoon Flood Inundation Mapping and Early Flood Warning Systems", Water, 2018

Publication

---

&lt;1 %

43

T. Sayama, Y. Tatebe, Y. Iwami, S. Tanaka. "Hydrologic sensitivity of flood runoff and inundation: 2011 Thailand floods in the Chao Phraya River basin", Copernicus GmbH, 2014

Publication

---

&lt;1 %

44

Xiaoqing Wu. "Performance Evaluation of the SLEUTH Model in the Shenyang Metropolitan Area of Northeastern China", Environmental Modeling & Assessment, 04/2009

Publication

---

&lt;1 %

45

Sahar Hadi Pour, Ahmad Khairi Abd Wahab, Shamsuddin Shahid, Md Asaduzzaman, Ashraf Dewan. "Low impact development techniques to mitigate the impacts of climate-change-induced urban floods: Current trends, issues and challenges", Sustainable Cities and Society, 2020

Publication

---

&lt;1 %

46

Sayama, T., Y. Tatebe, Y. Iwami, and S. Tanaka. "Hydrologic sensitivity of flood runoff and inundation: 2011 Thailand floods in the

&lt;1 %

# Chao Phraya River basin", Natural Hazards and Earth System Science, 2015.

Publication

---

47

Tongbi Tu, Ali Ercan, Kara J. Carr, M. Levent Kavvas, Toan Trinh, Kei Ishida, John Nosacka, Kevin Brown. "Coupling hydroclimate-hydraulic-sedimentation models to estimate flood inundation and sediment transport during extreme flood events under a changing climate", Science of The Total Environment, 2020

<1 %

Publication

---

Exclude quotes Off

Exclude matches Off

Exclude bibliography On

---

GRADEMARK REPORT

---

FINAL GRADE

GENERAL COMMENTS

**/0**

**Instructor**

---

PAGE 1

---

PAGE 2

---

PAGE 3

---

PAGE 4

---

PAGE 5

---

PAGE 6

---

PAGE 7

---

PAGE 8

---

PAGE 9

---

PAGE 10

---