

Comparison of Alum and Poly Aluminium Chloride at Various Doses in Coagulation Process on Color Removal of Palm Oil Mill Effluent

by Iqbal Syaichurrozi

Submission date: 04-May-2023 09:19AM (UTC+0700)

Submission ID: 2083629793

File name: in_Coagulation_Process_on_Color_Removal_of_Palm_Oil_Mill_Eff.pdf (667K)

Word count: 4199

Character count: 19157



Comparison of Alum and Poly Aluminium Chloride at Various Doses in Coagulation Process on Color Removal of Palm Oil Mill Effluent

Iqbal Syaichurrozi[✉], Jayanudin, Listiyani Nurwindya Sari, Anellysha Putri Apriantika

DOI: <https://doi.org/10.15294/jbat.v11i2.38885>

Department of Chemical Engineering, Faculty of Engineering, University of Sultan Ageng Tirtayasa, Cilegon-Banten, Indonesia

Article Info

Article history:
Received
September 2022
Accepted
October 2022
Published
December 2022

Keywords:
Alum;
Coagulant;
Color removal;
Kinetic;
Poly aluminium
chloride;
Palm oil mill
effluent

Abstract

The goal of this study was to investigate the effect of the type and dose of coagulants on the color removal of POME through the coagulation process. The coagulants used in this study were alum and poly aluminium chloride (PAC). The dose of coagulants was varied to 2, 4, 6, and 8 g/L. The results of this study showed that the optimum dose for coagulant of alum was 6 g/L and the optimum dose for coagulant of PAC was 8 g/L, in which these doses resulted in color removal efficiencies of $80.65 \pm 10.30\%$ and $94.12 \pm 1.00\%$, respectively. The PAC coagulant was more effective than alum coagulant. The kinetic models used to predict the color removal efficiency were the first- and second-order kinetic models. Based on the kinetic analysis, the MAPE of the first and second-order kinetic models was 9.17-28.28% and 5.48-21.62%, respectively. It means that the second-order kinetic model can predict with higher accuracy than the first-order kinetic model. By the second order kinetic model, the reaction kinetic constant of the coagulation process at alum coagulant of 6/L and PAC coagulant of 0.021 and 0.057 /min, respectively.

INTRODUCTION

Palm oil mill effluent (POME) is a liquid wastewater resulting from the palm oil industries in Indonesia (Damayanti et al., 2019; Najafpour et al., 2006). The main product of the palm oil industries is crude palm oil (CPO) (Azis et al., 2018). Based on the statistical data released by Statista (2021), the CPO production increases from 26.02 million tons in the year of 2012 to 48.3 million tons in the year of 2020. In year of 2050, the Indonesian CPO production is predicted to reach 189.66 million tons (Gabungan Pengusaha Kelapa Sawit Indonesia (GAPKI), 2017). Because of the increase in the CPO production, the amount of POME will increase significantly in the future until the year of 2050. To produce 1 ton of CPO, the palm oil industries result in 2.5-3 m³ of POME (Hasanudin & Haryanto, 2018). The POME has a color of dark

brown (Rakhmania et al., 2022) and contains a high chemical oxygen demand (COD) content of 42,500-86,300 mg/L and a high biological oxygen demand (BOD) content of 21,500-55,200 mg/L (Najafpour et al., 2006; Singh et al., 2013; Wang et al., 2015) so it can pollute the water bodies if it is discharged directly.

One of the wastewater treatments that can be applied to treat organic waste liquid is coagulation (Tetteh & Rathilal, 2019). Some previous studies reported that the coagulation has the potential to be used in treating POME. The study of Huzir et al. (2019) reported that the chemical oxygen demand (COD) and total solid (TS) in POME can be removed using the coagulation process with a coagulant of rice husk ash and alum. Furthermore, the study of Bhatia et al. (2007) reported that the total suspended solid (TSS) was successfully removed using the

[✉] Corresponding author:
E-mail: iqbal_syaichurrozi@untirta.ac.id

coagulation process with a coagulant of *Moringa oleifera* extract seed. The study of Ismail et al. (2014) also studied the potency of the coagulation in decreasing the TSS concentration in POME with coagulant of alum. The study of Tan et al. (2006) examined the effect of coagulants of aluminium sulfate, ferric chloride, ferric sulfate, and ammonium sulfate on the changes in COD and turbidity of POME. The study of Ahmad et al. (2005) reported that the coagulation can decrease the turbidity of POME with coagulant of modified industrial grade alum. The study of Chung et al. (2018) found that the coagulation process can decrease the turbidity, COD, TSS of POME with coagulants of peanut and wheat germ.

Based on the information above, the coagulation successfully decreased the COD, TSS, TS, and turbidity of POME. However, the previous studies have not studied the effect of the coagulant on the color of POME. The common coagulants usually used are alum and poly aluminium chloride (PAC). Therefore, the purpose of this study was to examine the effect of types and doses of coagulants on the color removal of the local POME. Furthermore, kinetic analysis was also conducted in this study. The kinetic analysis in color removal of POME has not been conducted by the previous studies yet.

9 MATERIALS AND METHODS

Materials

The local POME was collected from PTPN VIII (Lebak, Banten Province, Indonesia). The local POME contained a total solid of 21,000 mg/L, a total suspended solid of 18,000 mg/L, and a pH level of 4.3. The technical NaOH was obtained from a local store.

Coagulation Process

The lab-scale coagulation reactor was a glass beaker with a volume 1 L. The local POME was put into the glass beaker. The coagulants (alum and PAC) were added at doses of 2, 4, 6, and 8 g/L. Furthermore, the technical NaOH was added to adjust the liquid pH to 7.0 ± 0.1 . The coagulation process was carried out with an agitation speed of 200 rpm for 120 min. Per 20 min, the liquid pH was measured using a digital pH meter and 25-mL liquid samples were taken and put into 50-mL measuring glasses. The liquid samples in the measuring glasses were settled for 24 h. After

settling, the resulting supernatants were taken using a pipette and then analyzed for the color using a spectrophotometer.

Analysis

The liquid pH was measured using a digital pH meter with a model of PH-009(I)A, a pen-type pH meter. The color of the supernatants was measured using the spectrophotometer with a model of Genesys 10uv. The wavelength used for measuring the color supernatants was the optimum wavelength resulting in the highest absorbance value of the local POME sample. The absorbance values at various wavelengths using the local POME sample are shown in the Figure 1.

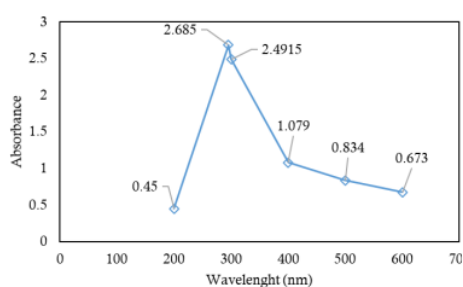


Figure 1. Absorbance value at various wavelengths using local POME liquid (dilution 10×).

Based on the Figure 1, the optimum wavelength was 295 nm which resulted in the highest absorbance value of 2.685. Therefore, the color of the supernatant samples was measured using the optimum wavelength. The efficiency of color removal was determined through Eq. (1).

$$C_r(\%) = \frac{C_0 - C_t}{C_0} \times 100\% \quad (1)$$

Where: C_r , color removal; C_0 , color of the local POME; C_t , color of the supernatant at time of t .

Kinetics

The changes in liquid color can be modeled using the simple reaction rate equation shown in Eq. (2).

$$\frac{dC}{dt} = -kC^n \quad (2)$$

Where: C, color of the liquid; k, kinetic constant of coagulation reaction (/min); n, order of reaction; t, time of the process (min)

The reaction order can be 1 or 2. Therefore, kinetic models with reaction orders of 1 and 2 are shown in Eqs. (3) and (4).

$$\frac{dC}{dt} = -k_1 C \quad (3)$$

$$\frac{dC}{dt} = -k_2 C^2 \quad (4)$$

Eqs. (3) and (4) were integrated and arranged to find Eqs. (5) and (6).

$$C_t = \frac{C_0}{\exp(k_1 t)} \quad (5)$$

$$C_t = \frac{1}{k_2 t + \frac{1}{C_0}} \quad (6)$$

The modeled color removal was calculated using Eq. (1) in which the C_t used was the modeled C_t obtained through Eqs. (5) and (6). The kinetic constants of k_1 and k_2 was determined using the optimization using Ms.Excel with the objective function of Mean Average Percentage Error (MAPE) shown in Eq. (7).

$$MAPE = \frac{1}{n} \sum_{i=1}^n \frac{C_{r_i}(model) - C_{r_i}(experiment)}{C_{r_i}(experiment)} \times 100\% \quad (7)$$

RESULTS AND DISCUSSION

Experimental Analysis

Coagulant of Alum

The color removal efficiency at various alum doses is shown in Figure 2(a). Based on the Figure 2(a), after process time of 120 min, the optimum alum dose was 6 g/L resulting in the color removal of 80.65±10.30%. An increase in alum dose from 2 g/L to 6 g/L successfully increased the color removal from 52.07±5.06% to 80.65±10.30%. However, a further increase in alum dose to 8 g/L increased the color removal to 76.37±16.14%.

When alum is added to the waste liquid, the coagulants of Al(OH)₃ are formed. The coagulants have the characteristic of gelatinous so they can adsorb the organic compounds to form flocs. The flocs will react with each other to form sludge. The coagulation reaction with the coagulant of alum can be written in Eqs. (8) and (9).




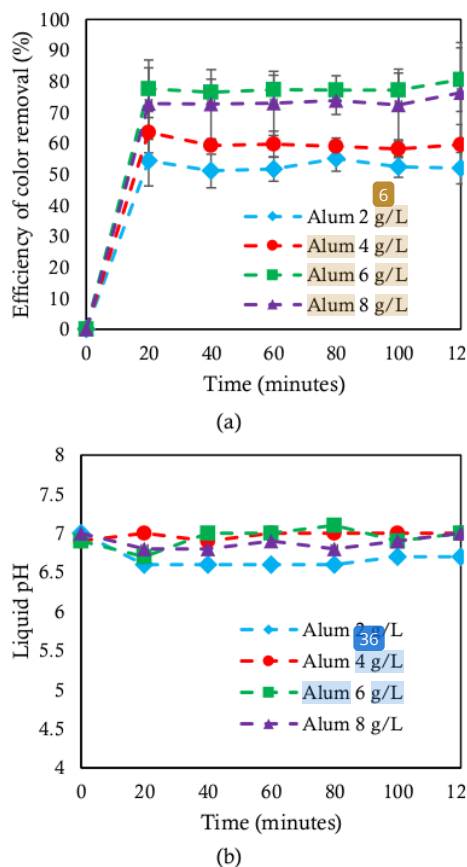


Figure 2. Effect of alum doses on the profiles of (A) color removal efficiency, (B) liquid pH.


Based on the Eqs. (8) and (9), the more the alum dose, the more the impurities can be removed, so the more the color can be removed. These phenomena were shown by the increase in alum dose from 2 to 6 g/L. However, an alum dose of 8 g/L resulted in less color removal than an alum dose of 6 g/L. It might be caused by that too many flocs were formed in the liquid and the flocs were still dispersed in the liquid. A previous study also reported that too much coagulant (watermelon seed) dose was not effective to remove total dissolved solid, turbidity and color of the river water (Ernest et al., 2017). Furthermore, the profiles of liquid pH during the coagulation process are shown in Figure 2(b). The pH profiles tended to be constants.

Coagulant of PAC

The color removal efficiency at various PAC doses is shown in Figure 3(a). Based on the Figure 3(a), after a process time of 120 min, the optimum alum dose was 8 g/L resulting in the color removal of $94.12 \pm 1.00\%$. An increase in PAC dose from 2 g/L to 8 g/L successfully increased the color removal from $59.09 \pm 12.72\%$ to $94.12 \pm 1.00\%$.

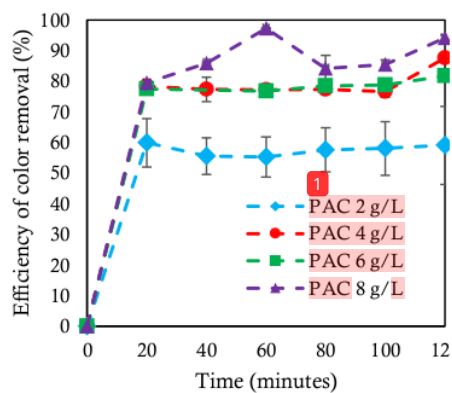



(a)

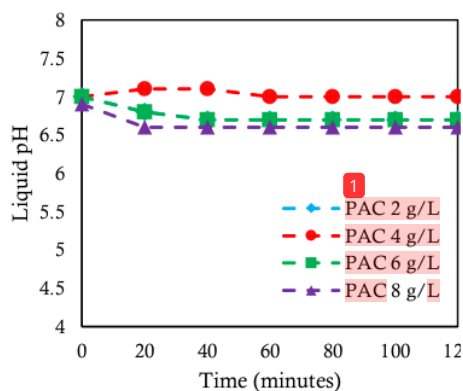

(b)

Figure 3. Effect of PAC doses on the profiles of (a) color removal efficiency, (b) liquid pH

When PAC is added to the waste liquid, the coagulants of $Al(OH)_3$ are also formed. The coagulation reaction with the coagulant of alum can be written in Eqs. (10) and (11).



Based on the Eqs. (10) and (11), the more the alum dose, the more the impurities can be

removed, so the more the color can be removed. These phenomena were shown by the increase in alum dose from 2 to 8 g/L. Furthermore, the profiles of liquid pH during the coagulation process are shown in Figure 3(b). The pH profiles tended to be constants.

Comparison between Alum and PAC on the Color Removal Efficiency

The color of treated POME after the coagulation process for 120 min at alum doses of 2, 4, 6, and 8 g/L was $52.07 \pm 5.06\%$, $59.66 \pm 6.43\%$, $80.65 \pm 10.30\%$, and $76.37 \pm 16.14\%$, respectively. Meanwhile, the color of treated POME after the coagulation process at PAC doses of 2, 4, 6, and 8 g/L was $59.09 \pm 12.72\%$, $87.60 \pm 0.11\%$, $81.79 \pm 0.47\%$, and $94.12 \pm 1.00\%$, respectively. Based on these data, the PAC was more effective than the alum in reducing the color of the local POME. The molecular weight of alum ($Al_2(SO_4)_3$) and PAC ($Al_2Cl(OH)_5$) was 342.15 g/mol and 174.45 g/mol. Based on Eqs. (8) and (10), 1 mol of $Al_2(SO_4)_3$ or $Al_2Cl(OH)_5$ is equal to 2 moles of $Al(OH)_3$. Because the molecular weight of $Al_2(SO_4)_3$ was bigger than $Al_2Cl(OH)_5$, the amount of moles of $Al(OH)_3$ at addition of $Al_2(SO_4)_3$ was less than at addition of $Al_2Cl(OH)_5$ with the same dose level. For example, the addition of 6 g/L of alum and PAC resulted in the moles of $Al(OH)_3$ of 0.0175 mol/L and 0.0344 mol/L. It means that, at the same doses, the addition PAC resulted in more moles of $Al(OH)_3$ than the addition of alum. Therefore, the addition of the PAC was more effective than the alum. A previous study also found the same results as this study. Study of Zouboulis et al. (2008) reported that the PAC resulted in better performance than the alum in treating the drinking water.

Kinetic Analysis

In this study, the first order kinetic model and the second order kinetic model were used to simulate the color removal of the local POME through the coagulation process with coagulant types of alum and PAC at various doses of 2, 4, 6, and 8 g/L. The two kinetic models were successfully used to predict the color removal efficiency profiles as a function of process time in coagulation with alum and PAC. The plotting between the experimental color removal and modeled color removal in coagulation with alum and PAC is shown in Figures 4 and 5. Furthermore,

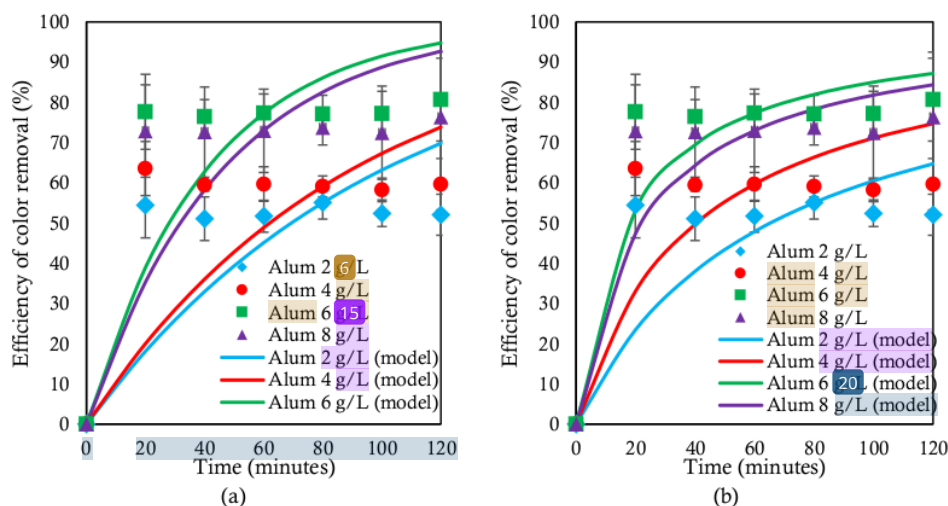


Figure 4. Simulation of color removal efficiency as function of time during coagulation with coagulant of alum using (a) first order kinetic model, (b) second order kinetic model

Table 1. Kinetic constant values resulted from simulation in coagulation with alum

Parameters	Alum doses (g/L)			
	2	4	6	8
First order kinetic model				
k_1 (/min)	0.010	0.011	0.025	0.022
MAPE (%)	28.28	27.54	19.24	21.19
Second order kinetic model				
k_2 (/min)	0.006	0.009	0.021	0.017
MAPE (%)	21.62	20.70	10.85	12.68

the kinetic constant values are shown in Tables 1 and 2.

Based on Table 1, by using the first-order kinetic model, the alum dose of 6 g/L resulted in a higher k_1 than the other doses, in which it was 0.025 /min. The higher the k_1 value, the faster the color was adsorption by coagulants. It means the fastest coagulation reaction occurred at the alum addition of 6 g/L. By using the second-order kinetic model, the alum dose of 6 g/L also resulted in a higher k_2 than the other doses, in which it was 0.021 /min.

Furthermore, Based on Table 2, by using the first-order kinetic model, the PAC dose of 8 g/L resulted in a higher k_1 than the other doses, in which it was 0.079 /min. It means the fastest coagulation reaction occurred at the PAC addition of 8 g/L. By using the second-order kinetic model, the PAC of 8 g/L also resulted in a higher k_2 than the other doses, in which it was 0.057 /min.

At the alum coagulant, the second-order kinetic model resulted in fewer MAPE values

(12.68-21.62%) than the first-order kinetic model (21.19-28.28%). Also, at the PAC coagulant, the second-order kinetic model resulted in fewer MAPE values (5.48-19.06%) than the first-order kinetic model (9.17-25.82%). Overall, the MAPE of the first and second-order kinetic models was 9.17-28.28% and 5.48-21.62%, respectively. It means that the second-order kinetic model can predict with higher accuracy than the first-order kinetic model either at the alum coagulant or the PAC coagulant.

Based on Tables 1 and 2, by using second-order kinetic model, the MAPE value at coagulant dose of 2 g/L was higher than that at other coagulant doses, which was 21.62% and 19.06% for alum and PAC, respectively. It might be caused by the complex organic compounds in POME. However, these MAPE values were below 25%. The model resulting in MAPE value below 25% shows the excellent prediction (Estévez et al., 2020). Therefore, in this study, the second-order kinetic model was still good in predicting the color removal

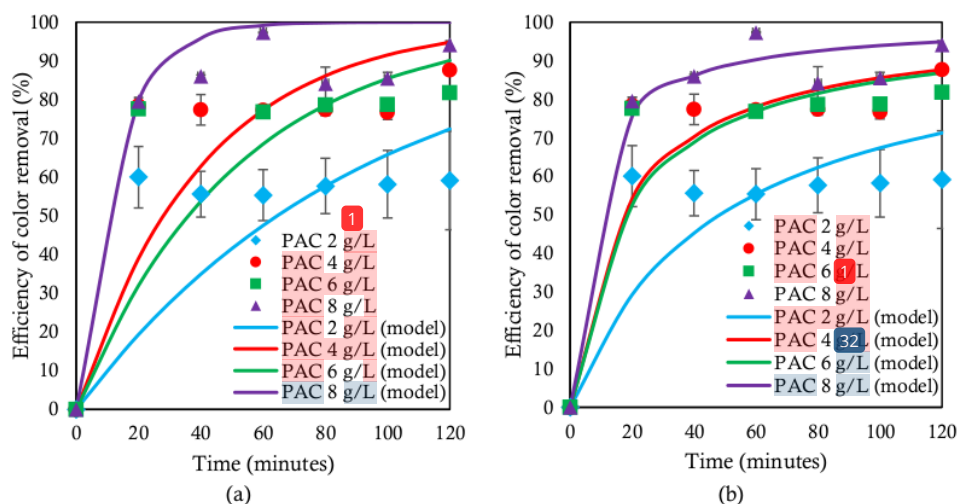


Figure 5. Simulation of color removal efficiency as a function of time during coagulation with coagulant of PAC using (A) first-order kinetic model, (B) second-order kinetic model.

Table 2. Kinetic constant values resulted from simulation in coagulation with PAC

Parameters	PAC doses (g/L)			
	2	4	6	8
First-order kinetic model				
k_1 (/min)	0.011	0.025	0.019	0.079
MAPE (%)	25.82	18.04	17.64	9.17
Second-order kinetic model				
k_2 (/min)	0.008	0.022	0.021	0.057
MAPE (%)	19.06	9.89	9.97	5.48

efficiency at various coagulant doses with coagulant type of alum and PAC.

CONCLUSION

By using alum as a coagulant, the optimum dose resulting in the highest color removal efficiency of $80.65 \pm 10.30\%$ was 6 g/L. Furthermore, the optimum dose resulting in the highest color removal efficiency of $94.12 \pm 1.00\%$ was 8 g/L. Hence, the PAC coagulant was more effective than the alum coagulant because the amount of moles of $Al(OH)_3$ at addition of $Al_2(SO_4)_3$ was less than at addition of $Al_2Cl(OH)_5$ with the same dose level. Based on the kinetic analysis, the MAPE of the first and second-order kinetic models was 9.17-28.24% and 5.48-21.62%, respectively, so the second order kinetic model resulted in better prediction than the first order kinetic model. The k_2 of coagulation process at

alum coagulant of 6/L and PAC coagulant of 0.021 and 0.057 /min, respectively.

ACKNOWLEDGMENT

The authors would like to thank University of Sultan Ageng Tirtayasa for financial support through Hibah Penelitian Dosen Madya 2022 with contract number of B/129/UN.43.9/PT.01.03/2022.

REFERENCES

- Ahmad, A.L., Ismail, S., Bhatia, S. 2005. Optimization of coagulation-flocculation process for palm oil mill effluent using response surface methodology. Environmental Science and Technology. 39: 2828-2834.
- Azis, M. M., Sudibyo, H., Budhianto, W. 2018. Modeling Lab-sized Anaerobic Fluidized Bed Reactor (AFBR) for Palm Oil Mill Effluent (POME) treatment: from Batch to

- Continuous Reactors. IOP Conference Series Material Science and Engineering. 316: 012072.
- Bhatia, S., Othman, Z., Ahmad, A. L. 2007. Coagulation-flocculation process for POME treatment using *Moringa oleifera* seeds extract: Optimization studies. *Chemical Engineering Journal*. 133: 205–212.
- Chung, C. Y., Selvarajoo, A., Sethu, V., Koyande, A. K., Arputhan, A., Lim, Z. C. 2018. Treatment of palm oil mill effluent (POME) by coagulation flocculation process using peanut-okra and wheat germ-okra. *Clean Technology Environmental Policy*. 20: 1951–1970.
- Damayanti, S. I., Astiti, D. F., Purnomo, C. W., Sarto, S., Budhijanto, W. 2019. Inoculum Selection and Micro-Aeration for Biogas Production in Two-Stage Anaerobic Digestion of Palm Oil Mill Effluent (POME). *Jurnal Bahan Alam Terbarukan* 8(1): 14–21.
- Ernest, E., Onyeka, O., David, N., Blessing, O., 2017. Effects of pH, Dosage, Temperature and Mixing Speed on The Efficiency of Water Melon Seed in Removing the Turbidity and Colour of Atabong River, Awka-Ibom State, Nigeria. *International Journal of Advance Engineering*. 3: 427-434.
- Estévez, J., Bellido-Jiménez, J. A., Liu, X., García-Marín, A. P. 2020. Monthly Precipitation Forecasts Using Wavelet Neural Networks Models in a Semiarid Environment. *Water*. 12: 1909.
- Gabungan Pengusaha Kelapa Sawit Indonesia (GAPKI). 2017. Kebijakan Nasional dalam Industri Sawit Menuju Ekonomi Indonesia pada Urutan 10 Besar Dunia [WWW Document]. URL <https://gapki.id/news/2342/kebijakan-nasional-dalam-industri-sawit-menuju-ekonomi-indonesia-pada-urutan-10-besar-dunia> (accessed 2.4.22).
- Hasanudin, U., Haryanto, A. 2018. Palm Oil Mill Effluent Recycling System For Sustainable Palm Oil Industries. *Asian Journal of Environmental Technology*. 2(1): 1 - 10.
- Huzir, N. M., Aziz, M. M. A., Ismail, S. B., Mahmood, N. A. N., Umor, N. A., Faua'ad Syed Muhammad, S. A. 2019. Optimization of coagulation-flocculation process for the palm oil mill effluent treatment by using rice husk ash. *Industrial Crops Production*. 139: 111482.
- Ismail, S., Idris, I., Ng, Y. T., Ahmad, A. L. 2014. Coagulation of Palm Oil Mill Effluent (POME) at High Temperature. *Journal of Applied Science*. 14: 1351–1354.
- Najafpour, G. D., Zinatizadeh, A. A. L., Mohamed, A. R., Hasnain Isa, M., Nasrollahzadeh, H. 2006. High-rate anaerobic digestion of palm oil mill effluent in an upflow anaerobic sludge-fixed film bioreactor. *Process Biochemistry*. 41: 370–379.
- Rakhmania, Kamyab, H., Yuzir, M. A., Riyadi, F. A., Ostadrahimi, A., Khademi, T., Ghfar, A. A., Kirpichnikova, I. 2022. Electrochemical oxidation of palm oil mill effluent using platinum as anode: Optimization using response surface methodology. *Environmental Research*. 214(3):113993.
- Singh, L., Siddiqui, M. F., Ahmad, A., Rahim, M. H. A., Sakinah, M., Wahid, Z. A. 2013. Application of polyethylene glycol immobilized *Clostridium* sp. LS2 for continuous hydrogen production from palm oil mill effluent in upflow anaerobic sludge blanket reactor. *Biochemical Engineering Journal*. 70: 158–165.
- Statista. 2021. Production volume of palm oil in Indonesia from 2012 to 2020 [WWW Document]. URL <https://www.statista.com/statistics/706786/production-of-palm-oil-in-indonesia/> (accessed 2.4.22).
- Tan, J., Ariffin, M., Ramlan, A. A., Rozainee, M. 2006. Chemical precipitation of palm oil mill effluent (POME). *Proceedings of the 1st International Conference on Natural Resources Engineering & Technology 2006*. 24-25th July 2006, Putrajaya, Malaysia. 400-407.
- Tetteh, E. K., Rathilal, S. 2019. Application of Organic Coagulants in Water and Wastewater Treatment. *Organics Polymer*. In A. Sand, & E. Zaki (Eds.). *Organic Polymers*.
- Wang, J., Mahmood, Q., Qiu, J. P., Li, Y. S., Chang, Y. S., Chi, L. N., Li, X. D. 2015. Zero discharge performance of an

industrial pilot-scale plant treating palm oil mill effluent. *Biomed Research International*. 2015: 617861.
Zouboulis, A., Traskas, G., Samaras, P. 2008. Comparison of Efficiency between Poly-

aluminium Chloride and Aluminium Sulphate Coagulants during Full-scale Experiments in a Drinking Water Treatment Plant. *Separation Science and Technology*. 43(6): 1507–1519.

Comparison of Alum and Poly Aluminium Chloride at Various Doses in Coagulation Process on Color Removal of Palm Oil Mill Effluent

ORIGINALITY REPORT

17%

SIMILARITY INDEX

12%

INTERNET SOURCES

15%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

1	Shon, H.. "The effect of pretreatment to ultrafiltration of biologically treated sewage effluent: a detailed effluent organic matter (EfOM) characterization", Water Research, 200404 Publication	2%
2	eprints.uad.ac.id Internet Source	2%
3	www.mdpi.com Internet Source	1%
4	doaj.org Internet Source	1%
5	Z Aksu. "Equilibrium and kinetic modelling of cadmium(II) biosorption by <i>C. vulgaris</i> in a batch system: effect of temperature", Separation and Purification Technology, 2001 Publication	1%

6	Yida Fang, Anderson Ellis, Minori Uchimiya, Timothy J. Strathmann. "Selective oxidation of colour-inducing constituents in raw sugar cane juice with potassium permanganate", Food Chemistry, 2019 Publication	1 %
7	Fatma Abouelenien, Yossra Ahmed Trabik, Mustafa Shukry, Mohamed El-Sharnouby, Samy Sayed, Ahmed Gaber, Nagham Rafeek Elsaidy. "A Pilot Model for the Treatment of Slaughterhouse Wastewater Using Zeolite or Psidium-Leaf Powder as a Natural Coagulant, Followed by Filtration with Rice Straw, in Comparison with an Inorganic Coagulant", Processes, 2022 Publication	1 %
8	worldwidescience.org Internet Source	1 %
9	link.springer.com Internet Source	1 %
10	www.deswater.com Internet Source	1 %
11	www.ijsrp.org Internet Source	1 %
12	eprints.utm.my Internet Source	<1 %

13

Widya Ernayati Kosimaningrum, Dhena Ria Barleany, Vera Nita Sako, Riska Ristiyanti. "Preparation of Gelatin-Chitosan-Honey-Based Hydrogel for Potential Active Material of Wound Care Dressing Application", Materials Science Forum, 2020

Publication

<1 %

14

Z. AKSU, E. KABASAKAL. "Adsorption Characteristics of 2,4-Dichlorophenoxyacetic Acid (2,4-D) from Aqueous Solution on Powdered Activated Carbon", Journal of Environmental Science and Health, Part B, 2005

Publication

<1 %

15

Venkata R. Chundru, Boopathi S. Mahadevan, John H. Johnson, Gordon G. Parker, Mahdi Shahbakhti. "Development of a 2D Model of a SCR Catalyst on a DPF", Emission Control Science and Technology, 2019

Publication

<1 %

16

G. Balcıođlu, I. Vergili, Z. B. Gönder, G. Yilmaz, A. M. Bacaksiz, Y. Kaya. "Effect of powdered activated carbon addition on membrane performance and fouling in anaerobic membrane bioreactor", International Journal of Environmental Science and Technology, 2022

Publication

<1 %

17

www.ijepe.org

Internet Source

<1 %

18

Elçin Demirhan, Belma Özbek. "Color Change Kinetics of Microwave-Dried Basil", Drying Technology, 2009

Publication

<1 %

19

M. Magesh Kumar, R. Karthikeyan, K. Anbalagan, M. Nishant Bhanushali. "Coagulation process for tannery industry effluent treatment using seeds protein: Kinetic study, pH effect on floc characteristics and design of a thickener unit ", Separation Science and Technology, 2016

Publication

<1 %

20

Buddhadeb Pal, Bhanu P. Joshi, Himadri Chakraborti, Aditya K. Jain et al. "Superconductivity in epitaxial InN thin films with large critical fields", AIP Publishing, 2018

Publication

<1 %

21

Shridharan Parthasarathy, Rachel L. Gomes, Sivakumar Manickam. "Process intensification of anaerobically digested palm oil mill effluent (AAD-POME) treatment using combined chitosan coagulation, hydrogen peroxide (H₂O₂) and Fenton's oxidation", Clean Technologies and Environmental Policy, 2015

Publication

<1 %

22

Ajeng Arum Sari, Feni Amriani, Rifahny Intan Satria Akhmad, Muhammad Rylo Pambudi, Rievan Putra Pamungkas, Muryanto Muryanto. "Adsorption of acid red and acid orange with adsorbent from bioethanol black liquor sludge", AIP Publishing, 2018

Publication

<1 %

23

Mohammed Abdulsalam, Hasfalina Che Man, Aida Isma Idris, Khairul Faezah Yunos, Zurina Zainal Abidin. "Treatment of Palm Oil Mill Effluent Using Membrane Bioreactor: Novel Processes and Their Major Drawbacks", Water, 2018

Publication

<1 %

24

Yuan Zhao, Tao Chen, Xiao-Fang Song, Jin-Yu Yang, Ya-Yang Wang, Yue-Sheng Li, Yi Liu. "Green synthesis of loofah-based biosorbent via radiation grafting for effective removal of methylene blue", Arabian Journal of Chemistry, 2022

Publication

<1 %

25

Hsu, J.C.. "The effect of saccharin addition on the mechanical properties and fracture behavior of electroless Ni-Cu-P deposit on Al", Thin Solid Films, 20050103

Publication

<1 %

26

Mohammed Shadi S. Abujazar, Sakine Ugurlu Karaağaç, Salem S. Abu Amr, Motasem Y.D.

<1 %

Alazaiza, Mohammed JK. Bashir. "Recent advancement in the application of hybrid coagulants in coagulation-flocculation of wastewater: A review", Journal of Cleaner Production, 2022

Publication

27

Yunus Ahmed, Zahira Yaakob, Parul Akhtar, Kamaruzzaman Sopian. "Production of biogas and performance evaluation of existing treatment processes in palm oil mill effluent (POME)", Renewable and Sustainable Energy Reviews, 2015

Publication

<1 %

28

amsdottorato.unibo.it

Internet Source

<1 %

29

mdpi-res.com

Internet Source

<1 %

30

umpir.ump.edu.my

Internet Source

<1 %

31

www.ijcmas.com

Internet Source

<1 %

32

www.membrane.unsw.edu.au

Internet Source

<1 %

33

www.tandfonline.com

Internet Source

<1 %

34

M. Assou, L. El Fels, A. El Asli, H. Fakidi, S. Souabi, M. Hafidi. "Landfill leachate treatment by a coagulation–flocculation process: effect of the introduction order of the reagents", *Desalination and Water Treatment*, 2016

Publication

<1 %

35

"Biorefinery of Oil Producing Plants for Value - Added Products", Wiley, 2022

Publication

<1 %

36

Ahmad Hussaini Jagaba. "Wastewater Treatment Using Alum, the Combinations of Alum-Ferric Chloride, Alum-Chitosan, Alum-Zeolite and Alum- *Moringa Oleifera* as Adsorbent and Coagulant", *International Journal of Engineering Management*, 2018

Publication

<1 %

37

Gülay Bayramoglu, Adil Denizli, Sema Bektas, M. Yakup Arica. "Entrapment of *Lentinus sajor-caju* into Ca-alginate gel beads for removal of Cd(II) ions from aqueous solution: preparation and biosorption kinetics analysis", *Microchemical Journal*, 2002

Publication

<1 %

38

Nur Shaylinda Mohd Zin, Zulazimie Azraff Zulkapli. "Application of Dual Coagulant (Alum + Barley) in Removing Colour from Leachate", *MATEC Web of Conferences*, 2017

Publication

<1 %

Exclude quotes On

Exclude matches Off

Exclude bibliography On

Comparison of Alum and Poly Aluminium Chloride at Various Doses in Coagulation Process on Color Removal of Palm Oil Mill Effluent

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6

PAGE 7

PAGE 8
